



2024 CATALOGUE





The technical characteristics indicated in the catalogue must be verified by the **THE MANUFACTURER**.

Non-contractual photographs.

Cata Electrodomésticos S.L. reserves the right to modify the characteristics of its products without prior notice.

© Design, layout, images and content are the property of

Cata Electrodomésticos S.L.

CATALOGUE2024

CATA, the company	p2-3
HOODS	p4-31
RENOVA PUR AIR	p4
SURFACE INTEGRATION	p4
DECORATIVE ISLANDS	p5-6
CORNER	p6
DECORATIVE HOODS	p7-20
BUILT-IN HOODS	p20-23
INSERTS	p23-25
TELESCOPIC	p26-30
CONVENTIONAL	p30-31
KITCHEN EXTRACTORS	p31
OVENS	p32-36
MICROWAVES	p37-38
HOBBS	p38-49
INDUCTION	p40-43
VITROCERAMIC	p44-45
GAS	p46-49
KITCHENWARE	p50
WHITE GOODS	p50-51
WINE COOLERS	p51
SINKS and TAPS	p52-56
VENTILATION	p57-67
ELECTRIC WATER HEATER	p68-69
TECHNICAL INFORMATION	p70-115



Spanish Company

CATA ELECTRODOMÉSTICOS, S.L., manufacturer of household appliances, founded in Torelló, Spain, in 1947. Since then, we have been pioneers in the domestic extraction business. Our wide product range includes extractors, hoods, hobs, ovens, microwaves, taps, sinks, dishwashers, washing machines, refrigerators, wine coolers and kitchenware.

Our values: Commitment to our customers

The design and development of our products are based on painstaking studies with a clear orientation towards meeting our customers' needs, providing solutions to promote functionality, efficiency, durability and reliability while remaining environmentally friendly. Every detail is important. That is why, in our brand with more than seven decades of history, we have placed, and continue placing, special emphasis on all of them until we obtain the best possible product.



Experience

At CATA we are constantly researching. We use top-quality components together with the latest manufacturing techniques to achieve the most technologically advanced products on the market. Our proven experience in the creation, development and manufacturing processes are the pillars on which the high efficiency, quality and reliability of our products is based.

Energy efficiency. Environment

At CATA we are committed to the environment and we think that your kitchen can be an example of energy efficiency. We strive; it is an obligation and a goal to be able to offer products that contribute to create a much more sustainable, clean and welcoming world.

Our low-energy household appliances will collaborate on energy savings, protecting the environment and noticing the economic savings of the use of efficient devices.


DECORATIVE HOODS

RENOVA PURE AIR
VNV90 XGBK

Cod.: 02159420 EAN: 8422248343077



- **Recirculation hood with integrated air purifier.** Eliminates odors with an efficiency of 98% and purifies 100% of dust, bacteria, viruses and volatile organic compounds.
- 6 extraction levels, 5 + 1 **TURBO**
- **Maintenance-free self-regeneratable carbon filter**
- **Air purification function**
- **Connectivity PRO+ with automatic control from the CATA hob**
- BRUSHLESS motor.
- Motor maximum airflow free outlet: 1400m³/h
- Sound power (Reg.(EU) n°65/2014): **46dB(A)**, maximum: 64dB(A)




INTEGRATION

RENOVA PURE AIR
MNV90 GWH

Cod.: 02189020 EAN: 8422248344692



- **Recirculation hood with integrated air purifier.** Eliminates odors with an efficiency of 98% and purifies 100% of dust, bacteria, viruses and volatile organic compounds.
- 6 extraction levels, 5 + 1 **TURBO**
- **Maintenance-free self-regeneratable carbon filter**
- **Air purification function**
- **Connectivity PRO+ with automatic control from the CATA hob**
- BRUSHLESS motor.
- Motor maximum airflow free outlet: 1400m³/h
- Sound power (Reg.(EU) n°65/2014): **46dB(A)**, maximum: 64dB(A)




SURFACE INTEGRATION

AS 750

Cod.: 08000405 EAN: 8422248109406




- **Touch Control Panel** with timer and cleaning filters indicator
- 6 extraction levels, 5 + 1 **TURBO** and **AUTO** function
- Extraction power (according to UNE/EN 61591): **580m³/h** -200m³/h
- Motor maximum airflow free outlet: 950m³/h
- Sound power (Reg.(EU) n°65/2014): **45dB(A)**, maximum: 64dB(A)
- BRUSHLESS motor. Ultra silent. Maximum energy consumption **135W**
- **Energy Class: A**




AS 600

Cod.: 08000406 EAN: 8422248198554



- **Touch Control Panel** with timer and cleaning filters indicator
- 6 extraction levels, 5 + 1 **TURBO** and **AUTO** function
- Extraction power (according to UNE/EN 61591): **531m³/h** -246m³/h
- Motor maximum airflow free outlet: 950m³/h
- Sound power (Reg.(EU) n°65/2014): **45dB(A)**, maximum: 64dB(A)
- BRUSHLESS motor. Ultra silent. Maximum energy consumption **135W**
- **Energy Class: A+**




IAS 770

Cod.: 08000403 EAN: 8422248102568



- **Touch Control Panel** with timer and cleaning filters indicator
- 5 extraction levels, 4 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **600m³/h** -140m³/h
- Motor maximum airflow free outlet: 950m³/h
- Sound power (Reg.(EU) n°65/2014): **40dB(A)**, maximum: 64dB(A)
- BRUSHLESS motor. Ultra silent. Maximum energy consumption **135W**
- **Energy Class: A**

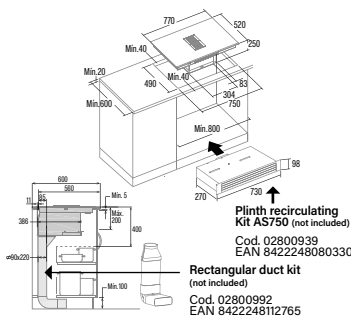


DECORATIVE ISLANDS

MAGRABA ISLAND

Cod.: 02119207 EAN: 8422248069342



- **Electronic control panel** with automatic shut-down timer
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **645m³/h** - 300m³/h
- Motor maximum airflow free outlet: 1200m³/h
- Sound power (Reg.(EU) n°65/2014): **48dB(A)**, maximum: 63dB(A)
- BT2 motor. Extra silent. Maximum energy consumption **200W**
- **High efficiency LED lighting**
- Energy class: C




MOON ISLAND

Cod.: 02119203 EAN: 8422248062084



- **Touch control panel** with automatic shut-down timer and cleaning filters indicator
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **645m³/h** - 300m³/h
- Motor maximum airflow free outlet: 1200m³/h
- Sound power (Reg.(EU) n°65/2014): **48dB(A)**, maximum: 63dB(A)
- BT2 motor. Extra silent. Maximum energy consumption **200W**
- **High efficiency LED lighting, adjustable intensity**
- Energy Class: C




FARO X ISLAND

Cod.: 02119101 EAN: 8422248074230




- **Electronic control panel** with automatic shut-down timer
- 3 extraction levels, 2 + 1 TURBO
- Extraction power (according to UNE/EN 61591): **800m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 65dB(A)
- BT3 motor. Extra silent. Maximum energy consumption **280W**
- High efficiency LED lighting
- **Energy class: A**




BENNU SLIM 1200 X ISLAND

Cod.: 02111309 EAN: 8422248112642



- **Touch control panel** with automatic shut-down timer and cleaning filters indicator + **remote control**
- 6 extraction levels, 5 + 1 TURBO
- Extraction power (according to UNE/EN 61591): **570m³/h** - 266m³/h
- Motor maximum airflow free outlet: 1200m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 65dB(A)
- Motor S6. Extra silent. Maximum energy consumption **93W**
- **AUTO connectivity** for control of the CATA AUTO hobs
- **High-efficiency lighting by intensity-adjustable two-tone warm / natural LED STRIP**
- **Energy class: A+**




BENNU SLIM 900 X ISLAND

Cod.: 02111308 EAN: 8422248110891



- **Touch control panel** with automatic shut-down timer and cleaning filters indicator + **remote control**
- 6 extraction levels, 5 + 1 TURBO
- Extraction power (according to UNE/EN 61591): **570m³/h** - 266m³/h
- Motor maximum airflow free outlet: 1200m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 65dB(A)
- Motor S6. Extra silent. Maximum energy consumption **93W**
- **AUTO connectivity** for control of the CATA AUTO hobs
- **High-efficiency lighting by intensity-adjustable two-tone warm / natural LED STRIP**
- **Energy class: A+**




SIRIN 1000 GWH ISLAND

Cod.: 02111002 EAN: 8422248097437



- **Touch control panel** with automatic shut-down timer and cleaning filters indicator + **remote control**
- 4 extraction levels, 3 + 1 TURBO
- Extraction power (according to UNE/EN 61591): **850m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 65dB(A)
- BT3 motor. Extra silent. Maximum energy consumption **280W**
- **High efficiency LED lighting, adjustable intensity**
- **Energy class: A**




SIRIN 1000 WH ISLAND

Cod.: 02111001 EAN: 8422248077750



- **Touch control panel** with automatic shut-down timer and cleaning filters indicator + **remote control**
- 4 extraction levels, 3 + 1 TURBO
- Extraction power (according to UNE/EN 61591): **850m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 65dB(A)
- BT3 motor. Extra silent. Maximum energy consumption **280W**
- **High efficiency LED lighting, adjustable intensity**
- **Energy Class: A**




FENIX 1000 X ISLAND

Cod.: 02111305 EAN: 8422248077798



- **Touch control panel** with automatic shut-down timer and cleaning filters indicator + **remote control**
- 4 extraction levels, 3 + 1 TURBO
- Extraction power (according to UNE/EN 61591): **850m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 65dB(A)
- BT3 motor. Extra silent. Maximum energy consumption **280W**
- **High efficiency LED lighting, adjustable intensity**
- **Energy Class: A**




LEGEND 900 XGBK ISLAND

Cod.: 02097202 EAN: 8422248061681



- **Touch Control Panel** with timer and cleaning filters indicator
- 5 extraction levels, 4 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **820m³/h** - 200m³/h
- Motor maximum airflow free outlet: 1200m³/h
- Sound power (Reg.(EU) n°65/2014): **40dB(A)**, maximum: 64dB(A)
- BRUSHLESS motor. Ultra silent. Maximum energy consumption **130W**
- **High efficiency Led lighting, adjustable intensity**
- **Energy Class: A+**




SYGMA 900 X ISLAND

Cod.: 02197313 EAN: 8422248062121



- **Electronic control Panel** with automatic shut down timer
- 3 extraction levels, 2 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **850m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 65dB(A)
- BT3 motor. Extra silent. Maximum energy consumption **280W**
- **High efficiency LED lighting**
- **Energy Class: A**




GAMMA 900 X ISLAND

Cod.: 02025205 EAN: 8422248077736



- **Electronic control Panel** with automatic shut down timer
- 3 extraction levels, 2 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **850m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 65dB(A)
- BT3 motor. Extra silent. Maximum energy consumption **280W**
- **High efficiency LED lighting**
- **Energy Class: A**




VEGA X ISLAND

Cod.: 02119311 EAN: 8422248077743



- **Electronic control Panel** with automatic shut down timer
- 3 extraction levels, 2 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **850m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 65dB(A)
- BT3 motor. Extra silent. Maximum energy consumption **280W**
- **High efficiency LED lighting**
- **Energy Class: A**




CORNER HOODS

GALA 900 L

Cod.: 02169304 EAN: 8422248355575



- **Electronic control Panel** with digital display
- 4 extraction levels, 3 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **802m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 65dB(A)
- BT3 motor. Extra silent. Maximum energy consumption **280W**
- **High efficiency LED STRIP lighting**
- **Energy Class: A**




GALA 900 R

Cod.: 02166304 EAN: 8422248355582



- **Electronic control Panel** with digital display
- 4 extraction levels, 3 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **802m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 65dB(A)
- BT3 motor. Extra silent. Maximum energy consumption **280W**
- **High efficiency LED STRIP lighting**
- **Energy Class: A**




ANGOLO BOX 1000 X

Cod.: 02195309 EAN: 8422248077774



- **Electronic control Panel** with automatic shut down timer
- 3 extraction levels, 2 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **800m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 65dB(A)
- BT3 motor. Extra silent. Maximum energy consumption **280W**
- **High efficiency strip LED lighting**
- **Energy Class: A**




ANGOLO X

Cod.: 02195310 EAN: 8422248077781



- **Electronic control Panel** with automatic shut down timer
- 3 extraction levels, 2 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **850m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **52dB(A)**, maximum: 67dB(A)
- BT3 motor. Extra silent. Maximum energy consumption **280W**
- **High efficiency strip LED lighting**
- **Energy Class: A**




DECORATIVE HOODS

GOYA PRO 90 BK
CATA&ROCA
Cod.: 02184401 EAN: 8422248080613




- **Multifunction TFT Touch screen** with automatic shut-down timer and cleaning filters indicator
- 6 extraction levels, Silent + 4 + **TURBO**
- Extraction power (according to UNE/EN 61591): **842m³/h** - 283m³/h
- Motor maximum airflow free outlet: 1400m³/h
- Sound power (Reg.(EU) n°65/2014): **49dB(A)**, maximum: 64dB(A)
- BRUSHLESS motor. Ultra silent. Maximum energy consumption **135W**
- **PRO connectivity** for control of the CATA PRO hobs
- **High efficiency strip Led lighting, adjustable intensity**
- **Energy Class: A+++**



GOYA 90 BK
CATA&ROCA
Cod.: 02129404 EAN: 8422248190541




- **Touch Control Panel** with automatic shut-down timer and cleaning filters indicator
- 6 extraction levels, 5 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **825m³/h** - 200m³/h
- Motor maximum airflow free outlet: 1200m³/h
- Sound power (Reg.(EU) n°65/2014): **40dB(A)**, maximum: 64dB(A)
- BRUSHLESS motor. Ultra silent. Maximum energy consumption **135W**
- **High-efficiency lighting by intensity-adjustable two-tone warm / natural LED STRIP**
- **Energy Class: A+++**



GOYA 70 BK
CATA&ROCA
Cod.: 02127404 EAN: 8422248190527




- **Touch Control Panel** with automatic shut-down timer and cleaning filters indicator
- 6 extraction levels, 5 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **825m³/h** - 200m³/h
- Motor maximum airflow free outlet: 1200m³/h
- Sound power (Reg.(EU) n°65/2014): **40dB(A)**, maximum: 64dB(A)
- BRUSHLESS motor. Ultra silent. Maximum energy consumption **135W**
- **High-efficiency lighting by intensity-adjustable two-tone warm / natural LED STRIP**
- **Energy Class: A+++**



GOYA 90 WH
CATA&ROCA
Cod.: 02129004 EAN: 8422248190534



- **Touch Control Panel** with automatic shut-down timer and cleaning filters indicator
- 6 extraction levels, 5 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **825m³/h** - 200m³/h
- Motor maximum airflow free outlet: 1200m³/h
- Sound power (Reg.(EU) n°65/2014): **40dB(A)**, maximum: 64dB(A)
- BRUSHLESS motor. Ultra silent. Maximum energy consumption **135W**
- **High-efficiency lighting by intensity-adjustable two-tone warm / natural LED STRIP**
- **Energy Class: A+++**




DECORATIVE HOODS

GOYA 70 WH
CATA&ROCA
Cod.: 02127004 EAN: 8422248190510




- **Touch Control Panel** with automatic shut-down timer and cleaning filters indicator
- 6 extraction levels, 5 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **825m³/h** - 200m³/h
- Motor maximum airflow free outlet: 1200m³/h
- Sound power (Reg.(EU) n°65/2014): **40dB(A)**, maximum: 64dB(A)
- BRUSHLESS motor. Ultra silent. Maximum energy consumption **135W**
- **High-efficiency lighting by intensity-adjustable two-tone warm / natural LED STRIP**
- **Energy Class: A+++**



GRECO 90 BK
CATA&ROCA
Cod.: 02184407 EAN: 8422248106146




- **Touch Control Panel** with automatic shut-down timer and cleaning filters indicator
- 4 extraction levels, 3 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **850m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 65dB(A)
- BT3 motor. Ultra silent. Maximum energy consumption **280W**
- High efficiency Led lighting, adjustable intensity
- **Energy Class: A**



GRECO 80 BK
CATA&ROCA
Cod.: 02145407 EAN: 8422248106160




- **Touch Control Panel** with automatic shut-down timer and cleaning filters indicator
- 4 extraction levels, 3 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **850m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 65dB(A)
- BT3 motor. Ultra silent. Maximum energy consumption **280W**
- High efficiency Led lighting, adjustable intensity
- **Energy Class: A**



GRECO 70 BK
CATA&ROCA
Cod.: 02133407 EAN: 8422248106191




- **Touch Control Panel** with automatic shut-down timer and cleaning filters indicator
- 4 extraction levels, 3 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **850m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 65dB(A)
- BT3 motor. Ultra silent. Maximum energy consumption **280W**
- High efficiency Led lighting, adjustable intensity
- **Energy Class: A**



GRECO 90 WH
CATA&ROCA
Cod.: 02184007 EAN: 8422248106153




- **Touch Control Panel** with automatic shut-down timer and cleaning filters indicator
- 4 extraction levels, 3 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **850m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 65dB(A)
- BT3 motor. Ultra silent. Maximum energy consumption **280W**
- **High efficiency Led lighting, adjustable intensity**
- **Energy Class: A**



GRECO 80 WH
CATA&ROCA
Cod.: 02145007 EAN: 8422248106184




- **Touch Control Panel** with automatic shut-down timer and cleaning filters indicator
- 4 extraction levels, 3 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **850m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 65dB(A)
- BT3 motor. Ultra silent. Maximum energy consumption **280W**
- **High efficiency Led lighting, adjustable intensity**
- **Energy Class: A**



GRECO 70 WH
CATA&ROCA
Cod.: 02133007 EAN: 8422248106207




- **Touch Control Panel** with automatic shut-down timer and cleaning filters indicator
- 4 extraction levels, 3 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **850m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 65dB(A)
- BT3 motor. Ultra silent. Maximum energy consumption **280W**
- **High efficiency Led lighting, adjustable intensity**
- **Energy Class: A**



GRECO 80 GR
CATA&ROCA
Cod.: 02145203 EAN: 8422248106177



- **Touch Control Panel** with automatic shut-down timer and cleaning filters indicator
- 4 extraction levels, 3 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **850m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 65dB(A)
- BT3 motor. Ultra silent. Maximum energy consumption **280W**
- **High efficiency Led lighting, adjustable intensity**
- **Energy Class: A**




DECORATIVE HOODS

THALASSA PRO
1200GBK
Cod.: 02131407 EAN: 8422248356329




- **Touch Control Panel** with digital display, automatic shut-down timer and cleaning filters indicator
- 6 extraction levels, 5 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **842m³/h** - 283m³/h
- Motor maximum airflow free outlet: 1400m³/h
- Sound power (Reg.(EU) n°65/2014): **46dB(A)**, maximum: 64dB(A)
- BRUSHLESS motor. Ultra silent. Maximum energy consumption **140W**
- **AUTO connectivity** for control of the CATA **AUTO** hobs
- **High-efficiency lighting by intensity-adjustable LED STRIP**
- Air purification function
- Pneumatic opening
- **Energy Class: A+++**



THALASSA PRO
900GBK
Cod.: 02139407 EAN: 8422248356282




- **Touch Control Panel** with digital display, automatic shut-down timer and cleaning filters indicator
- 6 extraction levels, 5 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **842m³/h** - 283m³/h
- Motor maximum airflow free outlet: 1400m³/h
- Sound power (Reg.(EU) n°65/2014): **46dB(A)**, maximum: 64dB(A)
- BRUSHLESS motor. Ultra silent. Maximum energy consumption **140W**
- **AUTO connectivity** for control of the CATA **AUTO** hobs
- **High-efficiency lighting by intensity-adjustable two-tone warm / natural LED STRIP**
- Air purification function
- Pneumatic opening
- **Energy Class: A+++**



THALASSA PRO
800GBK
Cod.: 02138407 EAN: 8422248356299




- **Touch Control Panel** with digital display, automatic shut-down timer and cleaning filters indicator
- 6 extraction levels, 5 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **842m³/h** - 283m³/h
- Motor maximum airflow free outlet: 1400m³/h
- Sound power (Reg.(EU) n°65/2014): **46dB(A)**, maximum: 64dB(A)
- BRUSHLESS motor. Ultra silent. Maximum energy consumption **140W**
- **AUTO connectivity** for control of the CATA **AUTO** hobs
- **High-efficiency lighting by intensity-adjustable two-tone warm / natural LED STRIP**
- Air purification function
- Pneumatic opening
- **Energy Class: A+++**



THALASSA PRO
700GBK
Cod.: 02137407 EAN: 8422248356305



- **Touch Control Panel** with digital display, automatic shut-down timer and cleaning filters indicator
- 6 extraction levels, 5 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **842m³/h** - 283m³/h
- Motor maximum airflow free outlet: 1400m³/h
- Sound power (Reg.(EU) n°65/2014): **46dB(A)**, maximum: 64dB(A)
- BRUSHLESS motor. Ultra silent. Maximum energy consumption **140W**
- **AUTO connectivity** for control of the CATA **AUTO** hobs
- **High-efficiency lighting by intensity-adjustable two-tone warm / natural LED STRIP**
- Air purification function
- Pneumatic opening
- **Energy Class: A+++**




**THALASSA PRO
600XGBK**

Cod.: 02136407 EAN: 8422248356312



- **Touch Control Panel** with digital display, automatic shut-down timer and cleaning filters indicator
- 6 extraction levels, 5 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **842m³/h** -200m³/h
- Motor maximum airflow free outlet: 1400m³/h
- Sound power (Reg.(EU) n°65/2014): **46dB(A)**, maximum: 64dB(A)
- BRUSHLESS motor. Ultra silent. Maximum energy consumption **140W**
- **AUTO connectivity** for control of the CATA **AUTO hobs**
- **High-efficiency lighting by intensity-adjustable two-tone warm / natural LED STRIP**
- Air purification function
- Pneumatic opening
- **Energy Class: A+++**




**THALASSA PRO
900XGWH**

Cod.: 02139007 EAN: 8422248356336



- **Touch Control Panel** with digital display, automatic shut-down timer and cleaning filters indicator
- 6 extraction levels, 5 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **842m³/h** -200m³/h
- Motor maximum airflow free outlet: 1400m³/h
- Sound power (Reg.(EU) n°65/2014): **46dB(A)**, maximum: 64dB(A)
- BRUSHLESS motor. Ultra silent. Maximum energy consumption **140W**
- **AUTO connectivity** for control of the CATA **AUTO hobs**
- **High-efficiency lighting by intensity-adjustable two-tone warm / natural LED STRIP**
- Air purification function
- Pneumatic opening
- **Energy Class: A+++**




**THALASSA PRO
800XGWH**

Cod.: 02138007 EAN: 8422248356343



- **Touch Control Panel** with digital display, automatic shut-down timer and cleaning filters indicator
- 6 extraction levels, 5 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **842m³/h** -200m³/h
- Motor maximum airflow free outlet: 1400m³/h
- Sound power (Reg.(EU) n°65/2014): **46dB(A)**, maximum: 64dB(A)
- BRUSHLESS motor. Ultra silent. Maximum energy consumption **140W**
- **AUTO connectivity** for control of the CATA **AUTO hobs**
- **High-efficiency lighting by intensity-adjustable two-tone warm / natural LED STRIP**
- Air purification function
- Pneumatic opening
- **Energy Class: A+++**




**THALASSA PRO
700XGWH**

Cod.: 02137007 EAN: 8422248356350



- **Touch Control Panel** with digital display, automatic shut-down timer and cleaning filters indicator
- 6 extraction levels, 5 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **842m³/h** -200m³/h
- Motor maximum airflow free outlet: 1400m³/h
- Sound power (Reg.(EU) n°65/2014): **46dB(A)**, maximum: 64dB(A)
- BRUSHLESS motor. Ultra silent. Maximum energy consumption **140W**
- **AUTO connectivity** for control of the CATA **AUTO hobs**
- **High-efficiency lighting by intensity-adjustable two-tone warm / natural LED STRIP**
- Air purification function
- Pneumatic opening
- **Energy Class: A+++**




**THALASSA PRO
600XGWH**

Cod.: 02136007 EAN: 8422248356367



- **Touch Control Panel** with digital display, automatic shut-down timer and cleaning filters indicator
- 6 extraction levels, 5 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **842m³/h** -200m³/h
- Motor maximum airflow free outlet: 1400m³/h
- Sound power (Reg.(EU) n°65/2014): **46dB(A)**, maximum: 64dB(A)
- BRUSHLESS motor. Ultra silent. Maximum energy consumption **140W**
- **AUTO connectivity** for control of the CATA **AUTO hobs**
- **High-efficiency lighting by intensity-adjustable two-tone warm / natural LED STRIP**
- Air purification function
- Pneumatic opening
- **Energy Class: A+++**




**THALASSA PRO
900XGGR**

Cod.: 02139507 EAN: 8422248356374



- **Touch Control Panel** with digital display, automatic shut-down timer and cleaning filters indicator
- 6 extraction levels, 5 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **842m³/h** -200m³/h
- Motor maximum airflow free outlet: 1400m³/h
- Sound power (Reg.(EU) n°65/2014): **46dB(A)**, maximum: 64dB(A)
- BRUSHLESS motor. Ultra silent. Maximum energy consumption **140W**
- **AUTO connectivity** for control of the CATA **AUTO hobs**
- **High-efficiency lighting by intensity-adjustable two-tone warm / natural LED STRIP**
- Air purification function
- Pneumatic opening
- **Energy Class: A+++**




**THALASSA PRO
800XGGR**

Cod.: 02138507 EAN: 8422248356381



- **Touch Control Panel** with digital display, automatic shut-down timer and cleaning filters indicator
- 6 extraction levels, 5 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **842m³/h** -200m³/h
- Motor maximum airflow free outlet: 1400m³/h
- Sound power (Reg.(EU) n°65/2014): **46dB(A)**, maximum: 64dB(A)
- BRUSHLESS motor. Ultra silent. Maximum energy consumption **140W**
- **AUTO connectivity** for control of the CATA **AUTO hobs**
- **High-efficiency lighting by intensity-adjustable two-tone warm / natural LED STRIP**
- Air purification function
- Pneumatic opening
- **Energy Class: A+++**




THALASSA 900GBK

Cod.: 02139406 EAN: 8422248356220



- **Electronic Control Panel** with digital display, automatic shut-down timer and cleaning filters indicator
- 6 extraction levels, 5 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **811m³/h** - 346m³/h
- Motor maximum airflow free outlet: 1200m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 65dB(A)
- B13 motor. Extra silent. Maximum energy consumption **280W**
- **High efficiency STRIP LED lighting, adjustable intensity**
- Air purification function
- Pneumatic opening
- **Energy Class: A+**




THALASSA 700GBK

Cod.: 02137406 EAN: 8422248356237



- **Electronic Control Panel with digital display**, automatic shut-down timer and cleaning filters indicator
- 6 extraction levels, 5 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **811m³/h** - 346m³/h
- Motor maximum airflow free outlet: 1200m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 65dB(A)
- Bt3 motor, Extra silent. Maximum energy consumption **280W**
- **High efficiency STRIP LED lighting, adjustable intensity**
- Air purification function
- Pneumatic opening
- **Energy Class: A+**




THALASSA 600GBK

Cod.: 02136406 EAN: 8422248356244



- **Electronic Control Panel with digital display**, automatic shut-down timer and cleaning filters indicator
- 6 extraction levels, 5 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **811m³/h** - 346m³/h
- Motor maximum airflow free outlet: 1200m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 65dB(A)
- Bt3 motor, Extra silent. Maximum energy consumption **280W**
- **High efficiency STRIP LED lighting, adjustable intensity**
- Air purification function
- Pneumatic opening
- **Energy Class: A+**




THALASSA 900GWH

Cod.: 02139006 EAN: 8422248356251



- **Electronic Control Panel with digital display**, automatic shut-down timer and cleaning filters indicator
- 6 extraction levels, 5 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **811m³/h** - 346m³/h
- Motor maximum airflow free outlet: 1200m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 65dB(A)
- Bt3 motor, Extra silent. Maximum energy consumption **280W**
- **High efficiency STRIP LED lighting, adjustable intensity**
- Air purification function
- Pneumatic opening
- **Energy Class: A+**




THALASSA 700GWH

Cod.: 02137006 EAN: 8422248356268



- **Electronic Control Panel with digital display**, automatic shut-down timer and cleaning filters indicator
- 6 extraction levels, 5 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **811m³/h** - 346m³/h
- Motor maximum airflow free outlet: 1200m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 65dB(A)
- Bt3 motor, Extra silent. Maximum energy consumption **280W**
- **High efficiency STRIP LED lighting, adjustable intensity**
- Air purification function
- Pneumatic opening
- **Energy Class: A+**




THALASSA 600GWH

Cod.: 02136006 EAN: 8422248356275



- **Electronic Control Panel with digital display**, automatic shut-down timer and cleaning filters indicator
- 6 extraction levels, 5 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **811m³/h** - 346m³/h
- Motor maximum airflow free outlet: 1200m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 65dB(A)
- Bt3 motor, Extra silent. Maximum energy consumption **280W**
- **High efficiency STRIP LED lighting, adjustable intensity**
- Air purification function
- Pneumatic opening
- **Energy Class: A+**




JUNO+ 9000 GBK

Cod.: 02059701 EAN: 8422248355643



- **Electronic Control Panel with digital display**, automatic shut-down timer and cleaning filters indicator
- 6 extraction levels, 5 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **562m³/h** - 170m³/h
- Motor maximum airflow free outlet: 900m³/h
- Sound power (Reg.(EU) n°65/2014): **44dB(A)**, maximum: 61dB(A)
- BRUSHLESS motor, Extra silent. Maximum energy consumption **95W**
- **High efficiency STRIP LED lighting, adjustable intensity**
- Pneumatic opening
- **Energy Class: A+**




JUNO+ 7000 GBK

Cod.: 02078701 EAN: 8422248355636



- **Electronic Control Panel with digital display**, automatic shut-down timer and cleaning filters indicator
- 6 extraction levels, 5 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **562m³/h** - 170m³/h
- Motor maximum airflow free outlet: 900m³/h
- Sound power (Reg.(EU) n°65/2014): **44dB(A)**, maximum: 61dB(A)
- BRUSHLESS motor, Extra silent. Maximum energy consumption **95W**
- **High efficiency STRIP LED lighting, adjustable intensity**
- Pneumatic opening
- **Energy Class: A+**




JUNO+ 6000 GBK

Cod.: 02027701 EAN: 8422248355629



- **Electronic Control Panel with digital display**, automatic shut-down timer and cleaning filters indicator
- 6 extraction levels, 5 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **562m³/h** - 170m³/h
- Motor maximum airflow free outlet: 900m³/h
- Sound power (Reg.(EU) n°65/2014): **44dB(A)**, maximum: 61dB(A)
- BRUSHLESS motor, Extra silent. Maximum energy consumption **95W**
- **High efficiency STRIP LED lighting, adjustable intensity**
- Pneumatic opening
- **Energy Class: A+**




JUNO+ 9000 GWH

Cod.: 02059801 EAN: 8422248355674



- **Touch Control Panel** with digital display, automatic shut-down timer and cleaning filters indicator
- 6 extraction levels, 5 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **562m³/h** - 170m³/h
- Motor maximum airflow free outlet: 900m³/h
- Sound power (Reg.(EU) n°65/2014): **44dB(A)**, maximum: 61dB(A)
- BRUSHLESS motor. Extra silent. Maximum energy consumption **95W**
- **High efficiency STRIP LED lighting, adjustable intensity**
- Pneumatic opening
- **Energy Class: A+**




JUNO+ 7000 GWH

Cod.: 02078801 EAN: 8422248355667



- **Touch Control Panel** with digital display, automatic shut-down timer and cleaning filters indicator
- 6 extraction levels, 5 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **562m³/h** - 170m³/h
- Motor maximum airflow free outlet: 900m³/h
- Sound power (Reg.(EU) n°65/2014): **44dB(A)**, maximum: 61dB(A)
- BRUSHLESS motor. Extra silent. Maximum energy consumption **95W**
- **High efficiency STRIP LED lighting, adjustable intensity**
- Pneumatic opening
- **Energy Class: A+**




JUNO+ 6000 GWH

Cod.: 02027801 EAN: 8422248355650



- **Touch Control Panel** with digital display, automatic shut-down timer and cleaning filters indicator
- 6 extraction levels, 5 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **562m³/h** - 170m³/h
- Motor maximum airflow free outlet: 900m³/h
- Sound power (Reg.(EU) n°65/2014): **44dB(A)**, maximum: 61dB(A)
- BRUSHLESS motor. Extra silent. Maximum energy consumption **95W**
- **High efficiency STRIP LED lighting, adjustable intensity**
- Pneumatic opening
- **Energy Class: A+**




JUNO 9000 GBK

Cod.: 02059700 EAN: 8422248355612



- **Touch Control Panel** with digital display, automatic shut-down timer and cleaning filters indicator
- 6 extraction levels, 5 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **428m³/h** - 170m³/h
- Motor maximum airflow free outlet: 600m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 64dB(A)
- BRUSHLESS motor. Extra silent. Maximum energy consumption **73W**
- **High efficiency Compact STRIP LED lighting, adjustable intensity**
- **Energy Class: A+**




JUNO 7000 GBK

Cod.: 02078700 EAN: 8422248355605



- **Touch Control Panel** with digital display, automatic shut-down timer and cleaning filters indicator
- 6 extraction levels, 5 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **428m³/h** - 170m³/h
- Motor maximum airflow free outlet: 600m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 64dB(A)
- BRUSHLESS motor. Extra silent. Maximum energy consumption **73W**
- **High efficiency Compact STRIP LED lighting, adjustable intensity**
- **Energy Class: A+**




JUNO 6000 GBK

Cod.: 02027700 EAN: 8422248355599



- **Touch Control Panel** with digital display, automatic shut-down timer and cleaning filters indicator
- 6 extraction levels, 5 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **428m³/h** - 170m³/h
- Motor maximum airflow free outlet: 600m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 64dB(A)
- BRUSHLESS motor. Extra silent. Maximum energy consumption **73W**
- **High efficiency Compact STRIP LED lighting, adjustable intensity**
- **Energy Class: A+**




WANDA 900 XGBK

Cod.: 02059405 EAN: 8422248102308



- **Touch Control Panel** with automatic shut-down timer
- 9 extraction levels
- Extraction power (according to UNE/EN 61591): **525m³/h** -207m³/h
- Motor maximum airflow free outlet: 1000m³/h
- Sound power (Reg.(EU) n°65/2014): **39dB(A)**, maximum: 59dB(A)
- BRUSHLESS motor. Ultra silent. Maximum energy consumption **70W**
- High efficiency Led lighting
- **Energy Class: A++**




WANDA 700 XGBK

Cod.: 02078405 EAN: 8422248102315



- **Touch Control Panel** with automatic shut-down timer
- 9 extraction levels
- Extraction power (according to UNE/EN 61591): **525m³/h** -207m³/h
- Motor maximum airflow free outlet: 1000m³/h
- Sound power (Reg.(EU) n°65/2014): **39dB(A)**, maximum 59dB(A)
- BRUSHLESS motor. Ultra silent. Maximum energy consumption **70W**
- High efficiency Led lighting
- **Energy Class: A++**




WANDA 600 XGBK

Cod.: 02027210 EAN: 8422248102322



- **Touch Control Panel** with automatic shut-down timer
- 9 extraction levels
- Extraction power (according to UNE/EN 61591): **525m³/h** -207m³/h
- Motor maximum airflow free outlet: 1000m³/h
- Sound power (Reg.(EU) n°65/2014): **39dB(A)**, maximum: 59dB(A)
- BRUSHLESS motor. Ultra silent. Maximum energy consumption **70W**
- High efficiency Led lighting
- **Energy Class: A++**




WANDA 900 XGWH

Cod.: 02059010 EAN: 8422248102339



- **Touch Control Panel** with automatic shut-down timer
- 9 extraction levels
- Extraction power (according to UNE/EN 61591): **525m³/h** -207m³/h
- Motor maximum airflow free outlet: 1000m³/h
- Sound power (Reg.(EU) n°65/2014): **39dB(A)**, maximum: 59dB(A)
- BRUSHLESS motor. Ultra silent. Maximum energy consumption **70W**
- High efficiency Led lighting
- **Energy Class: A++**




WANDA 700 XGWH

Cod.: 02078006 EAN: 8422248102346



- **Touch Control Panel** with automatic shut-down timer
- 9 extraction levels
- Extraction power (according to UNE/EN 61591): **525m³/h** -207m³/h
- Motor maximum airflow free outlet: 1000m³/h
- Sound power (Reg.(EU) n°65/2014): **39dB(A)**, maximum: 59dB(A)
- BRUSHLESS motor. Ultra silent. Maximum energy consumption **70W**
- High efficiency Led lighting
- **Energy Class: A++**




WANDA 600 XGWH

Cod.: 02027012 EAN: 8422248102353



- **Touch Control Panel** with automatic shut-down timer
- 9 extraction levels
- Extraction power (according to UNE/EN 61591): **525m³/h** -207m³/h
- Motor maximum airflow free outlet: 1000m³/h
- Sound power (Reg.(EU) n°65/2014): **39dB(A)**, maximum: 59dB(A)
- BRUSHLESS motor. Ultra silent. Maximum energy consumption **70W**
- High efficiency Led lighting
- **Energy Class: A++**




LENA 900 XGBK

Cod.: 02059403 EAN: 8422248108089



- **Touch Control Panel** with automatic shut-down timer
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **500m³/h** - 310m³/h
- Motor maximum airflow free outlet: 750m³/h
- Sound power (Reg.(EU) n°65/2014): **45dB(A)**, maximum: 63dB(A)
- 1 motor. Maximum energy consumption **120W**
- High efficiency LED lighting
- Energy Class: B




LENA 600XGBK

Cod.: 02032205 EAN: 8422248102292



- **Touch Control Panel** with automatic shut-down timer
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **500m³/h** - 310m³/h
- Motor maximum airflow free outlet: 750m³/h
- Sound power (Reg.(EU) n°65/2014): **45dB(A)**, maximum: 63dB(A)
- 1 motor. Maximum energy consumption **120W**
- High efficiency LED lighting
- Energy Class: B




LENA 500XGBK

Cod.: 02032206 EAN: 8422248102377



- **Touch Control Panel** with automatic shut-down timer
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **500m³/h** - 310m³/h
- Motor maximum airflow free outlet: 750m³/h
- Sound power (Reg.(EU) n°65/2014): **45dB(A)**, maximum: 63dB(A)
- 1 motor. Maximum energy consumption **120W**
- High efficiency LED lighting
- Energy Class: B




LENA 900XGWH

Cod.: 02059011 EAN: 8422248346559



- **Touch Control Panel** with automatic shut-down timer
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **500m³/h** - 310m³/h
- Motor maximum airflow free outlet: 750m³/h
- Sound power (Reg.(EU) n°65/2014): **45dB(A)**, maximum: 63dB(A)
- 1 motor. Maximum energy consumption **120W**
- High efficiency LED lighting
- Energy Class: B




LENA 600XGWH

Cod.: 02032005 EAN: 8422248102285



- **Touch Control Panel** with automatic shut-down timer
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **500m³/h** - 310m³/h
- Motor maximum airflow free outlet: 750m³/h
- Sound power (Reg.(EU) n°65/2014): **45dB(A)**, maximum: 63dB(A)
- 1 motor. Maximum energy consumption **120W**
- High efficiency LED lighting
- Energy Class: B




LENA 500XGWH

Cod.: 02032006 EAN: 8422248102360



- **Touch Control Panel** with automatic shut-down timer
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **500m³/h** - 310m³/h
- Motor maximum airflow free outlet: 750m³/h
- Sound power (Reg.(EU) n°65/2014): **45dB(A)**, maximum: 63dB(A)
- 1 motor. Maximum energy consumption **120W**
- High efficiency LED lighting
- Energy Class: B




LEGEND 9000 XGBK

Cod.: 02029207 EAN: 8422248101493



- **Touch Control Panel** with automatic shut-down timer and cleaning filters indicator
- **9 extraction levels**
- Extraction power (according to UNE/EN 61591): **640m³/h** -236m³/h
- Motor maximum airflow free outlet: 1000m³/h
- Sound power (Reg.(EU) n°65/2014): **44dB(A)**, maximum: 65dB(A)
- BRUSHLESS motor. Ultra silent. Maximum energy consumption **70W**
- **High efficiency STRIP LED lighting**
- **Energy Class: A++**




LEGEND 7000 XGBK

Cod.: 02021202 EAN: 8422248101509



- **Touch Control Panel** with automatic shut-down timer and cleaning filters indicator
- **9 extraction levels**
- Extraction power (according to UNE/EN 61591): **640m³/h** -236m³/h
- Motor maximum airflow free outlet: 1000m³/h
- Sound power (Reg.(EU) n°65/2014): **44dB(A)**, maximum: 65dB(A)
- BRUSHLESS motor. Ultra silent. Maximum energy consumption **70W**
- **High efficiency STRIP LED lighting**
- **Energy Class: A++**




LEGEND 6000 XGBK

Cod.: 02060208 EAN: 8422248102544



- **Touch Control Panel** with automatic shut-down timer and cleaning filters indicator
- **9 extraction levels**
- Extraction power (according to UNE/EN 61591): **640m³/h** -236m³/h
- Motor maximum airflow free outlet: 1000m³/h
- Sound power (Reg.(EU) n°65/2014): **44dB(A)**, maximum: 65dB(A)
- BRUSHLESS motor. Ultra silent. Maximum energy consumption **70W**
- **High efficiency STRIP LED lighting**
- **Energy Class: A++**




LEGEND 900 X

Cod.: 02029305 EAN: 8422248068635



- **Electronic Control Panel with digital display**, automatic shut-down timer and cleaning filters indicator
- **5 extraction levels, 4 + 1 TURBO**
- Extraction power (according to UNE/EN 61591): **648m³/h** -200m³/h
- Motor maximum airflow free outlet: 1000m³/h
- Sound power (Reg.(EU) n°65/2014): **40dB(A)**, maximum: 64dB(A)
- BRUSHLESS motor. Ultra silent. Maximum energy consumption **130W**
- **High efficiency Led lighting, adjustable intensity**
- **Energy Class: A**




LEGEND 700 X

Cod.: 02021306 EAN: 8422248068659



- **Electronic Control Panel with digital display**, automatic shut-down timer and cleaning filters indicator
- **5 extraction levels, 4 + 1 TURBO**
- Extraction power (according to UNE/EN 61591): **648m³/h** -200m³/h
- Motor maximum airflow free outlet: 1000m³/h
- Sound power (Reg.(EU) n°65/2014): **40dB(A)**, maximum: 64dB(A)
- BRUSHLESS motor. Ultra silent. Maximum energy consumption **130W**
- **High efficiency Led lighting, adjustable intensity**
- **Energy Class: A**




SYGMA 12010 X

Cod.: 02132305 EAN: 8422248073035



- **Electronic control Panel** with automatic shut down timer
- **4 extraction levels, 3 + 1 TURBO**
- Extraction power (according to UNE/EN 61591): **802m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 67dB(A)
- BT3 motor. Extra silent. Maximum energy consumption **280W**
- **High efficiency STRIP LED lighting, adjustable intensity**
- **Energy Class: A**




SYGMA 9010 X

Cod.: 02075305 EAN: 8422248110051



- **Electronic control Panel** with automatic shut down timer
- **4 extraction levels, 3 + 1 TURBO**
- Extraction power (according to UNE/EN 61591): **802m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 67dB(A)
- BT3 motor. Extra silent. Maximum energy consumption **280W**
- **High efficiency STRIP LED lighting, adjustable intensity**
- **Energy Class: A**




SYGMA 7010 X

Cod.: 02021310 EAN: 8422248110068



- **Electronic control Panel** with automatic shut down timer
- **4 extraction levels, 3 + 1 TURBO**
- Extraction power (according to UNE/EN 61591): **802m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 67dB(A)
- BT3 motor. Extra silent. Maximum energy consumption **280W**
- **High efficiency STRIP LED lighting, adjustable intensity**
- **Energy Class: A**




SYGMA 6010 X

Cod.: 02060310 EAN: 8422248110075



- **Electronic control Panel** with automatic shut down timer
- 4 extraction levels, 3 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **802m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 67dB(A)
- BT3 motor. Extra silent. Maximum energy consumption **280W**
- **High efficiency STRIP LED lighting, adjustable intensity**
- **Energy Class: A**




SYGMA 9010 BK

Cod.: 02075401 EAN: 8422248110082



- **Electronic control Panel** with automatic shut down timer
- 4 extraction levels, 3 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **802m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 67dB(A)
- BT3 motor. Extra silent. Maximum energy consumption **280W**
- **High efficiency STRIP LED lighting, adjustable intensity**
- **Energy Class: A**




SYGMA 7010 BK

Cod.: 02021400 EAN: 8422248357272



- **Electronic control Panel** with automatic shut down timer
- 4 extraction levels, 3 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **802m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 67dB(A)
- BT3 motor. Extra silent. Maximum energy consumption **280W**
- **High efficiency STRIP LED lighting, adjustable intensity**
- **Energy Class: A**




SYGMA 6010 BK

Cod.: 02060400 EAN: 8422248357289



- **Electronic control Panel** with automatic shut down timer
- 4 extraction levels, 3 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **802m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 67dB(A)
- BT3 motor. Extra silent. Maximum energy consumption **280W**
- **High efficiency STRIP LED lighting, adjustable intensity**
- **Energy Class: A**




S PLUS 9010 X

Cod.: 02029602 EAN: 8422248093422



- **Mechanical Control Panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **637m³/h** - 361m³/h
- Motor maximum airflow free outlet: 1150m³/h
- Sound power (Reg.(EU) n°65/2014): **69dB(A)**, maximum: 74dB(A)
- Motor M3R. Extra silent. Maximum energy consumption **270W**
- **High efficiency Compact Strip LED lighting**
- **Energy Class: C**




S PLUS 7010 X

Cod.: 02021602 EAN: 8422248093446



- **Mechanical Control Panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **637m³/h** - 361m³/h
- Motor maximum airflow free outlet: 1150m³/h
- Sound power (Reg.(EU) n°65/2014): **69dB(A)**, maximum: 74dB(A)
- Motor M3R. Extra silent. Maximum energy consumption **270W**
- **High efficiency Compact Strip LED lighting**
- **Energy Class: C**




S PLUS 6010 X

Cod.: 02060602 EAN: 8422248093453



- **Mechanical Control Panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **637m³/h** - 361m³/h
- Motor maximum airflow free outlet: 1150m³/h
- Sound power (Reg.(EU) n°65/2014): **69dB(A)**, maximum: 74dB(A)
- Motor M3R. Extra silent. Maximum energy consumption **270W**
- **High efficiency Compact Strip LED lighting**
- **Energy Class: C**




ST-9000 X

Cod.: 02029309 EAN: 8422248108706



- **Mechanical Control Panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **302m³/h** - 165m³/h
- Motor maximum airflow free outlet: 360m³/h
- Sound power (Reg.(EU) n°65/2014): **58dB(A)**, maximum: 62dB(A)
- Maximum energy consumption **65W**
- **High efficiency STRIP LED lighting**
- Energy Class: C




ST-7000 X

Cod.: 02021309 EAN: 8422248108690



- **Mechanical Control Panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **302m³/h** - 165m³/h
- Motor maximum airflow free outlet: 360m³/h
- Sound power (Reg.(EU) n°65/2014): **58dB(A)**, maximum: 62dB(A)
- Maximum energy consumption **65W**
- **High efficiency STRIP LED lighting**
- Energy Class: C




ST-6000 X

Cod.: 02060309 EAN: 8422248108683



- **Mechanical Control Panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **302m³/h** - 165m³/h
- Motor maximum airflow free outlet: 360m³/h
- Sound power (Reg.(EU) n°65/2014): **58dB(A)**, maximum: 62dB(A)
- Maximum energy consumption **65W**
- **High efficiency lighting**
- Energy Class: C




SK 6000 X

Cod.: 02060609 EAN: 8422248356978



- **Mechanical Control Panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **380m³/h** - 166m³/h
- Motor maximum airflow free outlet: 400m³/h
- Sound power (Reg.(EU) n°65/2014): **52dB(A)**, maximum: 68dB(A)
- K10 motor. Maximum energy consumption **93W**
- **High efficiency STRIP LED lighting**
- Energy Class: A




CK 9000 X

Cod.: 02008107 EAN: 8422248356992



- **Mechanical Control Panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **380m³/h** - 166m³/h
- Motor maximum airflow free outlet: 400m³/h
- Sound power (Reg.(EU) n°65/2014): **52dB(A)**, maximum: 68dB(A)
- K10 motor. Maximum energy consumption **93W**
- **High efficiency STRIP LED lighting**
- Energy Class: A




CK 6000 X

Cod.: 02005107 EAN: 8422248356985



- **Mechanical Control Panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **380m³/h** - 166m³/h
- Motor maximum airflow free outlet: 400m³/h
- Sound power (Reg.(EU) n°65/2014): **52dB(A)**, maximum: 68dB(A)
- K10 motor. Maximum energy consumption **93W**
- **High efficiency STRIP LED lighting**
- Energy Class: A




CK 6000 BK

Cod.: 02005407 EAN: 8422248357005



- **Mechanical Control Panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **380m³/h** - 166m³/h
- Motor maximum airflow free outlet: 400m³/h
- Sound power (Reg.(EU) n°65/2014): **52dB(A)**, maximum: 68dB(A)
- K10 motor. Maximum energy consumption **93W**
- **High efficiency STRIP LED lighting**
- Energy Class: A






CG5-T900 X

Cod.: 02008299 EAN: 8422248108102



- **Mechanical Control Panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **495m³/h** - 300 m³/h
- Motor maximum airflow free outlet: 517m³/h
- Sound power (Reg.(EU) n°65/2014): **45dB(A)**, maximum: 66dB(A)
- Maximum energy consumption **120W**
- **High efficiency LED lighting**
- Energy Class: B




CG5-T600 X

Cod.: 02005299 EAN: 8422248097413



- **Mechanical Control Panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **495m³/h** - 300 m³/h
- Motor maximum airflow free outlet: 517m³/h
- Sound power (Reg.(EU) n°65/2014): **45dB(A)**, maximum: 66dB(A)
- Maximum energy consumption **120W**
- **High efficiency LED lighting**
- Energy Class: B




CHIMNEY

BETA 1200 X

Cod.: 02157309 EAN: 8422248062299



- **Electronic control Panel** with automatic shut down timer
- 3 extraction levels, 2 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **850m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **52dB(A)**, maximum: 67dB(A)
- BT3 motor. Extra silent. Maximum energy consumption **280W**
- **High efficiency LED lighting**
- Energy Class: A




BETA 900 X

Cod.: 02051303 EAN: 8422248061827



- **Electronic control Panel** with automatic shut down timer
- 3 extraction levels, 2 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **850m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **52dB(A)**, maximum: 67dB(A)
- BT3 motor. Extra silent. Maximum energy consumption **280W**
- **High efficiency LED lighting**
- Energy Class: A




BETA 700 X

Cod.: 02093303 EAN: 8422248061834



- **Electronic control Panel** with automatic shut down timer
- 3 extraction levels, 2 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **850m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **52dB(A)**, maximum: 67dB(A)
- BT3 motor. Extra silent. Maximum energy consumption **280W**
- **High efficiency LED lighting**
- Energy Class: A




BETA 600 X

Cod.: 02050305 EAN: 8422248061841



- **Electronic control Panel** with automatic shut down timer
- 3 extraction levels, 2 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **850m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **52dB(A)**, maximum: 67dB(A)
- BT3 motor. Extra silent. Maximum energy consumption **280W**
- **High efficiency LED lighting**
- Energy Class: A




OMEGA 900 X

Cod.: 02004310 EAN: 8422248190596



- **Mechanical control panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **645m³/h** - 385m³/h
- Motor maximum airflow free outlet: 1100m³/h
- Sound power (Reg.(EU) n°65/2014): **58dB(A)**, maximum: 72dB(A)
- M3R motor. Extra silent. Maximum energy consumption **270W**
- **High efficiency Compact STRIP LED lighting**
- Energy Class: C




OMEGA 7500 X

Cod.: 02003307 EAN: 8422248101615



- **Mechanical control panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **595m³/h** - 410m³/h
- Motor maximum airflow free outlet: 1100m³/h
- Sound power (Reg.(EU) n°65/2014): **58dB(A)**, maximum: 68dB(A)
- 1 motor. Maximum energy consumption **200W**
- **High efficiency Compact STRIP LED lighting**
- **Energy Class: A**




OMEGA 700 X

Cod.: 02003310 EAN: 8422248190602



- **Mechanical control panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **645m³/h** - 385m³/h
- Motor maximum airflow free outlet: 1100m³/h
- Sound power (Reg.(EU) n°65/2014): **58dB(A)**, maximum: 72dB(A)
- M3R motor. Extra silent. Maximum energy consumption **270W**
- **High efficiency Compact STRIP LED lighting**
- **Energy Class: C**




OMEGA 600 X

Cod.: 02002310 EAN: 8422248109826



- **Mechanical control panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **645m³/h** - 385m³/h
- Motor maximum airflow free outlet: 1100m³/h
- Sound power (Reg.(EU) n°65/2014): **58dB(A)**, maximum: 72dB(A)
- M3R motor. Extra silent. Maximum energy consumption **270W**
- **High efficiency Compact STRIP LED lighting**
- **Energy Class: C**




OMEGA 900 BK

Cod.: 02004410 EAN: 8422248190633



- **Mechanical control panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **645m³/h** - 385m³/h
- Motor maximum airflow free outlet: 1100m³/h
- Sound power (Reg.(EU) n°65/2014): **58dB(A)**, maximum: 72dB(A)
- M3R motor. Extra silent. Maximum energy consumption **270W**
- **High efficiency Compact STRIP LED lighting**
- **Energy Class: C**




OMEGA 600 BK

Cod.: 02002410 EAN: 8422248109833



- **Mechanical control panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **645m³/h** - 385m³/h
- Motor maximum airflow free outlet: 1100m³/h
- Sound power (Reg.(EU) n°65/2014): **58dB(A)**, maximum: 72dB(A)
- M3R motor. Extra silent. Maximum energy consumption **270W**
- **High efficiency Compact STRIP LED lighting**
- **Energy Class: C**




OMEGA 900 WH

Cod.: 02004010 EAN: 8422248190619



- **Mechanical control panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **645m³/h** - 385m³/h
- Motor maximum airflow free outlet: 1100m³/h
- Sound power (Reg.(EU) n°65/2014): **58dB(A)**, maximum: 72dB(A)
- M3R motor. Extra silent. Maximum energy consumption **270W**
- **High efficiency Compact STRIP LED lighting**
- **Energy Class: C**




OMEGA 700 WH

Cod.: 02003010 EAN: 8422248190626



- **Mechanical control panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **645m³/h** - 385m³/h
- Motor maximum airflow free outlet: 1100m³/h
- Sound power (Reg.(EU) n°65/2014): **58dB(A)**, maximum: 72dB(A)
- M3R motor. Extra silent. Maximum energy consumption **270W**
- **High efficiency Compact STRIP LED lighting**
- **Energy Class: C**




OMEGA 600 WH

Cod.: 02002010 EAN: 8422248109819



- **Mechanical control panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **645m³/h** - 385m³/h
- Motor maximum airflow free outlet: 1100m³/h
- Sound power (Reg.(EU) n°65/2014): **58dB(A)**, maximum: 72dB(A)
- M3R motor. Extra silent. Maximum energy consumption **270W**
- **High efficiency Compact STRIP LED lighting**
- **Energy Class: C**



VK 6000 X

Cod.: 02061606 EAN: 8422248357012



- **Mechanical Control Panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **395m³/h** - 166m³/h
- Motor maximum airflow free outlet: 400m³/h
- Sound power (Reg.(EU) n°65/2014): **49dB(A)**, maximum: 68dB(A)
- K10 motor. Maximum energy consumption **93W**
- **High efficiency Strip Led lighting**
- **Energy Class: A**

VK 6000 BK

Cod.: 02061405 EAN: 8422248357074



- **Mechanical Control Panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **395m³/h** - 166m³/h
- Motor maximum airflow free outlet: 400m³/h
- Sound power (Reg.(EU) n°65/2014): **49dB(A)**, maximum: 68dB(A)
- K10 motor. Maximum energy consumption **93W**
- **High efficiency Strip Led lighting**
- **Energy Class: A**

VK 6000 WH

Cod.: 02061105 EAN: 8422248357081







- **Mechanical Control Panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **395m³/h** - 166m³/h
- Motor maximum airflow free outlet: 400m³/h
- Sound power (Reg.(EU) n°65/2014): **49dB(A)**, maximum: 68dB(A)
- K10 motor. Maximum energy consumption **93W**
- **High efficiency Strip Led lighting**
- **Energy Class: A**

V-500 X

Cod.: 02088303 EAN: 8422248087315



- **Mechanical control panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **420m³/h** - 210m³/h
- Motor maximum airflow free outlet: 750m³/h
- Sound power (Reg.(EU) n°65/2014): **53dB(A)**, maximum: 65dB(A)
- 1 motor. Extra silent. Maximum energy consumption **95W**
- **High efficiency LED E-14 lighting**
- **Energy Class: C**




V3-T900 X

Cod.: 02063399 EAN: 8422248095303



- **Mechanical control panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **335m³/h** - 166m³/h
- Motor maximum airflow free outlet: 360m³/h
- Sound power (Reg.(EU) n°65/2014): **51dB(A)**, maximum: 66dB(A)
- 1 motor. Extra silent. Maximum energy consumption **65W**
- **High efficiency Compact STRIP LED lighting**
- **Energy Class: B**




V3-T600 X

Cod.: 02061399 EAN: 8422248095273



- **Mechanical control panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **335m³/h** - 166m³/h
- Motor maximum airflow free outlet: 360m³/h
- Sound power (Reg.(EU) n°65/2014): **51dB(A)**, maximum: 66dB(A)
- 1 motor. Extra silent. Maximum energy consumption **65W**
- **High efficiency Compact STRIP LED lighting**
- **Energy Class: B**




V3-T600 WH

Cod.: 02061799 EAN: 8422248110198



- **Mechanical control panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **335m³/h** - 166m³/h
- Motor maximum airflow free outlet: 360m³/h
- Sound power (Reg.(EU) n°65/2014): **51dB(A)**, maximum: 66dB(A)
- 1 motor. Extra silent. Maximum energy consumption **65W**
- **High efficiency Compact STRIP LED lighting**
- **Energy Class: B**




Q-7790 BK

Cod.: 02149402 EAN: 8422248084161



- **Mechanical control panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **645m³/h** - 385m³/h
- Motor maximum airflow free outlet: 1150m³/h
- Sound power (Reg.(EU) n°65/2014): **58dB(A)**, maximum: 72dB(A)
- M3R motor. Extra silent. Maximum energy consumption **270W**
- **High efficiency LED lighting**
- Energy Class: C




Q-7760 BK

Cod.: 02148402 EAN: 8422248084178



- **Mechanical control panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **645m³/h** - 385m³/h
- Motor maximum airflow free outlet: 1150m³/h
- Sound power (Reg.(EU) n°65/2014): **58dB(A)**, maximum: 72dB(A)
- M3R motor. Extra silent. Maximum energy consumption **270W**
- **High efficiency LED lighting**
- Energy Class: C



CHORUS XBK

Cod.: 02165201 EAN: 8422248055529




HOOD

- **Mechanical Control Panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **400m³/h** -210m³/h
- Motor maximum airflow free outlet: 600m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 62dB(A)
- Motor K7 PLUS. Extra silent. Maximum energy consumption **95W**
- **High efficiency LED lighting**
- Energy Class: C

MICROWAVE FEATURES

- 20 litre microwave
- Simultaneous 1,000 W quartz grill
- Five power levels, 700 W output
- Revolving dish ø255 mm
- Timer from 0 to 95 minutes
- Automatic defrosting by time and weight
- 9 automatic access menus
- Fast start button
- Safety lock




BUILT-IN HOODS

TENTA 90 GWH

Cod.: 02189005 EAN: 8422248093729




- **Touch Control Panel** with digital display, automatic shut-down timer and cleaning filters indicator
- 6 extraction levels, 5 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **765m³/h** - 245m³/h
- Motor maximum airflow free outlet: 1400m³/h
- Sound power (Reg.(EU) n°65/2014): **46dB(A)**, maximum: 63dB(A)
- BRUSHLESS motor. Ultra silent. Maximum energy consumption **135W**
- **High-efficiency lighting** by intensity-adjustable two-tone warm / natural **STRIP LED**
- **Energy Class: A+**




CORONA X 90

Cod.: 02189308 EAN: 8422248110549




- **Electronic Control Panel** with automatic shut-down timer
- 4 extraction levels, 3 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **850m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 67dB(A)
- BT3 motor. Ultra silent. Maximum energy consumption **280W**
- **High efficiency STRIP LED lighting**
- **Energy Class: A**




CORONA X 80

Cod.: 02188308 EAN: 8422248110532




- **Electronic Control Panel** with automatic shut-down timer
- 4 extraction levels, 3 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **850m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 67dB(A)
- BT3 motor. Ultra silent. Maximum energy consumption **280W**
- **High efficiency STRIP LED lighting**
- **Energy Class: A**




CORONA X 120

Cod.: 02181308 EAN: 8422248110556




- **Electronic Control Panel** with automatic shut-down timer
- 4 extraction levels, 3 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **850m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 65dB(A)
- BT3 motor. Ultra silent. Maximum energy consumption **280W**
- **High efficiency STRIP LED lighting**
- **Energy Class: A**




CORONA X 100

Cod.: 02180308 EAN: 8422248198547



- **Electronic Control Panel** with automatic shut-down timer
- 4 extraction levels, 3 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **850m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 65dB(A)
- BT3 motor. Ultra silent. Maximum energy consumption **280W**
- **High efficiency STRIP LED lighting**
- **Energy Class: A**




CORONA X 70

Cod.: 02187308 EAN: 8422248110525



- **Electronic Control Panel** with automatic shut-down timer
- 4 extraction levels, 3 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **850m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 67dB(A)
- BT3 motor. Ultra silent. Maximum energy consumption **280W**
- **High efficiency STRIP LED lighting**
- **Energy Class: A**




CORONA X 60

Cod.: 02186308 EAN: 8422248110518




- **Electronic Control Panel** with automatic shut-down timer
- 4 extraction levels, 3 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **850m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 67dB(A)
- BT3 motor. Ultra silent. Maximum energy consumption **280W**
- **High efficiency STRIP LED lighting**
- **Energy Class: A**



BUILT-IN HOODS

CORONA BK 90

Cod.: 02189400 EAN: 8422248348782



- **Electronic Control Panel** with automatic shut-down timer
- 4 extraction levels, 3 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **850m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 67dB(A)
- BT3 motor. Ultra silent. Maximum energy consumption **280W**
- **High efficiency STRIP LED lighting**
- **Energy Class: A**

CORONA BK 60

Cod.: 02186400 EAN: 8422248198257



- **Electronic Control Panel** with automatic shut-down timer
- 4 extraction levels, 3 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **850m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 67dB(A)
- BT3 motor. Ultra silent. Maximum energy consumption **280W**
- **High efficiency STRIP LED lighting**
- **Energy Class: A**

CORONA WH 60

Cod.: 02186010 EAN: 8422248355216







- **Electronic Control Panel** with automatic shut-down timer
- 4 extraction levels, 3 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **850m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 65dB(A)
- BT3 motor. Ultra silent. Maximum energy consumption **280W**
- **High efficiency STRIP LED lighting**
- **Energy Class: A**

ARMONIA 90 X

Cod.: 02189309 EAN: 8422248110587



- **Mechanical Control Panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **645m³/h** - 385m³/h
- Motor maximum airflow free outlet: 1150m³/h
- Sound power (Reg.(EU) n°65/2014): **56dB(A)**, maximum: 70dB(A)
- B3R motor. Extra silent. Maximum energy consumption **270W**
- **High efficiency compact STRIP LED lighting**
- **Energy Class: C**



ARMONIA 80 X

Cod.: 02188309 EAN: 8422248356022



- **Mechanical Control Panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **645m³/h** - 385m³/h
- Motor maximum airflow free outlet: 1150m³/h
- Sound power (Reg.(EU) n°65/2014): **56dB(A)**, maximum: 70dB(A)
- B3R motor. Extra silent. Maximum energy consumption **270W**
- **High efficiency compact STRIP LED lighting**
- **Energy Class: C**

ARMONIA 70 X

Cod.: 02187309 EAN: 8422248351928



- **Mechanical Control Panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **645m³/h** - 385m³/h
- Motor maximum airflow free outlet: 1150m³/h
- Sound power (Reg.(EU) n°65/2014): **56dB(A)**, maximum: 70dB(A)
- B3R motor. Extra silent. Maximum energy consumption **270W**
- **High efficiency compact STRIP LED lighting**
- **Energy Class: C**

ARMONIA 60 X

Cod.: 02186309 EAN: 8422248110570







- **Mechanical Control Panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **645m³/h** - 385m³/h
- Motor maximum airflow free outlet: 1150m³/h
- Sound power (Reg.(EU) n°65/2014): **56dB(A)**, maximum: 70dB(A)
- B3R motor. Extra silent. Maximum energy consumption **270W**
- **High efficiency compact STRIP LED lighting**
- **Energy Class: C**

ARMONIA 45 X

Cod.: 02184309 EAN: 8422248110563



- **Mechanical Control Panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **645m³/h** - 385m³/h
- Motor maximum airflow free outlet: 1150m³/h
- Sound power (Reg.(EU) n°65/2014): **56dB(A)**, maximum: 70dB(A)
- B3R motor. Extra silent. Maximum energy consumption **270W**
- **High efficiency compact STRIP LED lighting**
- **Energy Class: C**




ARMONIA 70 BK

Cod.: 02187409 EAN: 8422248356015

NEW



- **Mechanical Control Panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **645m³/h** - 385m³/h
- Motor maximum airflow free outlet: 1150m³/h
- Sound power (Reg.(EU) n°65/2014): **56dB(A)**, maximum: 70dB(A)
- B3R motor. Extra silent. Maximum energy consumption **270W**
- **High efficiency compact STRIP LED lighting**
- Energy Class: C




ARMONIA 60 BK

Cod.: 02186409 EAN: 8422248355995

NEW



- **Mechanical Control Panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **645m³/h** - 385m³/h
- Motor maximum airflow free outlet: 1150m³/h
- Sound power (Reg.(EU) n°65/2014): **56dB(A)**, maximum: 70dB(A)
- B3R motor. Extra silent. Maximum energy consumption **270W**
- **High efficiency compact STRIP LED lighting**
- Energy Class: C




INSERTS

GC DUAL 75 BK

Cod.: 02131208 EAN: 8422248078320



- **Touch control panel** with automatic shut-down timer and cleaning filters indicator + remote control
- 4 extraction levels, 3 + **1 TURBO**
- Extraction power (according to UNE/EN 61591): **820m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 65dB(A)
- BT3 motor. Extra silent. Maximum energy consumption **280W**
- **High efficiency LED lighting, adjustable intensity**
- **Energy Class: A**




GC DUAL 45 BK

Cod.: 02130208 EAN: 8422248078306



- **Touch control panel** with automatic shut-down timer and cleaning filters indicator + remote control
- 4 extraction levels, 3 + **1 TURBO**
- Extraction power (according to UNE/EN 61591): **820m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 65dB(A)
- BT3 motor. Extra silent. Maximum energy consumption **280W**
- **High efficiency LED lighting, adjustable intensity**
- **Energy Class: A**




GC DUAL 75 WH

Cod.: 02131207 EAN: 8422248078313



- **Touch Control Panel** with automatic shut-down timer and cleaning filters indicator
- 4 extraction levels, 3 + **1 TURBO**
- Extraction power (according to UNE/EN 61591): **820m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 65dB(A)
- BT3 motor. Extra silent. Maximum energy consumption **280W**
- **High efficiency Led lighting, adjustable intensity**
- **Energy Class: A**




GC DUAL 45 WH

Cod.: 02130207 EAN: 8422248078290



- **Touch Control Panel** with automatic shut-down timer and cleaning filters indicator
- 4 extraction levels, 3 + **1 TURBO**
- Extraction power (according to UNE/EN 61591): **820m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 65dB(A)
- BT3 motor. Extra silent. Maximum energy consumption **280W**
- **High efficiency Led lighting, adjustable intensity**
- **Energy Class: A**




INSERTS

GCX 83 SD

Cod.: 02031308 EAN: 8422248103589



- **Touch Control Panel** with automatic shut-down timer and cleaning filters indicator
- 4 extraction levels, 3 + **1 TURBO**
- Extraction power (according to UNE/EN 61591): **750m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 65dB(A)
- BT3 motor. Extra silent. Maximum energy consumption **280W**
- **High efficiency STRIP LED lighting**
- **Energy Class: A**




GCX 53 SD

Cod.: 02030308 EAN: 8422248103572



- **Touch Control Panel** with automatic shut-down timer and cleaning filters indicator
- 4 extraction levels, 3 + **1 TURBO**
- Extraction power (according to UNE/EN 61591): **750m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 65dB(A)
- BT3 motor. Extra silent. Maximum energy consumption **280W**
- **High efficiency STRIP LED lighting**
- **Energy Class: A**




GPL 75 X

Cod.: 02031304 EAN: 8422248198486



- **Electronic Control Panel** with digital display automatic shut-down timer
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **591m³/h** - 252m³/h
- Motor maximum airflow free outlet: 900m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 67dB(A)
- BT3 motor. Extra silent. Maximum energy consumption **205W**
- **High efficiency STRIP LED lighting**
- **Energy Class: B**




GPL 52 X

Cod.: 02030304 EAN: 8422248198479



- **Electronic Control Panel** with digital display automatic shut-down timer
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **589m³/h** - 249m³/h
- Motor maximum airflow free outlet: 900m³/h
- Sound power (Reg.(EU) n°65/2014): **49dB(A)**, maximum: 67dB(A)
- BT3 motor. Extra silent. Maximum energy consumption **205W**
- **High efficiency STRIP LED lighting**
- **Energy Class: B**




GL 75 X

Cod.: 02031302 EAN: 8422248190411

NEW



- **Touch Control Panel** with automatic shut-down timer and cleaning filters indicator
- 4 extraction levels, 3 + **1 TURBO**
- Extraction power (according to UNE/EN 61591): **820m³/h** - 340m³/h
- Motor maximum airflow free outlet: 1350m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 65dB(A)
- BT3 motor. Extra silent. Maximum energy consumption **280W**
- **High efficiency Led lighting, adjustable intensity**
- **Energy Class: A**




GL 45 X

Cod.: 02030305 EAN: 8422248077842



- **Touch Control Panel** with automatic shut-down timer and cleaning filters indicator
- 4 extraction levels, 3 + **1 TURBO**
- Extraction power (according to UNE/EN 61591): **820m³/h** - 340m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 65dB(A)
- Motor maximum airflow free outlet: 1350m³/h
- BT3 motor. Extra silent. Maximum energy consumption **280W**
- **High efficiency Led lighting, adjustable intensity**
- **Energy Class: A**




GT-PLUS 75 X

Cod.: 02031301 EAN: 8422248190381

NEW



- **Mechanical Control Panel**
- **3 extractor levels**
- Extraction power (according to UNE/EN 61591): **645 m³/h** - 300 m³/h
- Motor maximum airflow free outlet: 1200m³/h
- Sound power (Reg.(EU) n° 65/2014): **50dB(A)**, maximum: 65dB (A)
- BT2 motor. Extra silent. Maximum energy consumption **200W**
- **High efficiency compact STRIP LED lighting**
- **Energy Class: C**




GT-PLUS 45 X

Cod.: 02030309 EAN: 8422248190374

NEW



- **Mechanical Control Panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **645m³/h** - 300m³/h
- Motor maximum airflow free outlet: 1200m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 65dB(A)
- BT2 motor. Extra silent. Maximum energy consumption **200W**
- **High efficiency compact STRIP LED lighting**
- **Energy Class: C**




GT-PLUS 45 WH

Cod.: 02030005 EAN: 8422248190398

NEW



- **Mechanical Control Panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **645m³/h** - 300m³/h
- Motor maximum airflow free outlet: 1200m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 65dB(A)
- BT2 motor. Extra silent. Maximum energy consumption **200W**
- **High efficiency compact STRIP LED lighting**
- **Energy Class: C**




GT-PLUS 45 BK

Cod.: 02030408 EAN: 8422248190404

NEW



- **Mechanical Control Panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **645m³/h** - 300m³/h
- Motor maximum airflow free outlet: 1200m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 65dB(A)
- BT2 motor. Extra silent. Maximum energy consumption **200W**
- **High efficiency compact STRIP LED lighting**
- **Energy Class: C**




GCB 73 X

Cod.: 02031300 EAN: 8422248108461




- **Mechanical Control Panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **372m³/h** -283m³/h
- Motor maximum airflow free outlet: 620m³/h
- Sound power (Reg.(EU) n°65/2014): **60dB(A)**, maximum: 66dB(A)
- 1 motor. Extra silent. Maximum energy consumption **120W**
- **High efficiency compact STRIP LED lighting**
- Energy Class: C

**GCB 55 X**

Cod.: 02030300 EAN: 8422248108454




- **Mechanical Control Panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **371m³/h** -282m³/h
- Motor maximum airflow free outlet: 620m³/h
- Sound power (Reg.(EU) n°65/2014): **59dB(A)**, maximum: 66dB(A)
- 1 motor. Extra silent. Maximum energy consumption **120W**
- **High efficiency compact STRIP LED lighting**
- Energy Class: C

**G 50 LUX X**

Cod.: 02130302 EAN: 8422248082716




- **Mechanical Control Panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **400m³/h** -210m³/h
- Motor maximum airflow free outlet: 620m³/h
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**, maximum: 62dB(A)
- K7 PLUS motor. Extra silent. Maximum energy consumption **95W**
- **High efficiency Led lighting**
- Energy Class: C

**G-45 X**

Cod.: 02039305 EAN: 8422248087377




- **Slider Control Panel**
- 2 extraction levels
- Extraction power (according to UNE/EN 61591): **390m³/h** - 150m³/h
- Motor maximum airflow free outlet: 620m³/h
- Sound power (Reg.(EU) n°65/2014): **45dB(A)**, maximum: 57dB(A)
- Tangential motor. Extra silent. Maximum energy consumption **100W**
- Iluminación LED E-14
- Energy Class: C

**G-45 WH**

Cod.: 02039005 EAN: 8422248087384




- **Slider Control Panel**
- 2 extraction levels
- Extraction power (according to UNE/EN 61591): **390m³/h** - 150m³/h
- Motor maximum airflow free outlet: 620m³/h
- Sound power (Reg.(EU) n°65/2014): **45dB(A)**, maximum: 57dB(A)
- Tangential motor. Extra silent. Maximum energy consumption **100W**
- Iluminación LED E-14
- Energy Class: C

**GK 4500 X**

Cod.: 02039306 EAN: 8422248357135




- **Slider Control Panel**
- 2 extraction levels
- Extraction power (according to UNE/EN 61591): **360m³/h** - 190m³/h
- Motor maximum airflow free outlet: 620m³/h
- Sound power (Reg.(EU) n°65/2014): **56dB(A)**, maximum: 67dB(A)
- Tangential motor. Extra silent. Maximum energy consumption **103W**
- Iluminación LED E-14 (EU Models)
- Energy Class: B (EU Models)

**GK 4500 WH**

Cod.: 02039007 EAN: 8422248357142



- **Slider Control Panel**
- 2 extraction levels
- Extraction power (according to UNE/EN 61591): **360m³/h** - 190m³/h
- Motor maximum airflow free outlet: 620m³/h
- Sound power (Reg.(EU) n°65/2014): **56dB(A)**, maximum: 67dB(A)
- Tangential motor. Extra silent. Maximum energy consumption **103W**
- Iluminación LED E-14 (EU Models)
- Energy Class: B (EU Models)



TELESCOPIC

TFH-6830 X

Cod.: 02010601 EAN: 8422248112741

NEW



- **Touch Control Panel** with automatic shut-down timer and cleaning filters indicator
- 6 extraction levels, 5 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **795m³/h** -201m³/h
- Motor maximum airflow free outlet: 1200m³/h
- Sound power (Reg.(EU) n°65/2014): **46dB(A)**, maximum: 64dB(A)
- BRUSHLESS motor. Extra silent. Maximum energy consumption **135W**
- **High efficiency STRIP LED lighting**, adjustable intensity
- **Energy Class: A+++**

TFH-6830 GWH

Cod.: 02010101 EAN: 8422248112758

NEW



- **Touch Control Panel** with automatic shut-down timer and cleaning filters indicator
- 6 extraction levels, 5 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **795m³/h** -201m³/h
- Motor maximum airflow free outlet: 1200m³/h
- Sound power (Reg.(EU) n°65/2014): **46dB(A)**, maximum: 64dB(A)
- BRUSHLESS motor. Extra silent. Maximum energy consumption **135W**
- **High efficiency STRIP LED lighting**, adjustable intensity
- **Energy Class: A+++**

TFH-6830 GBK

Cod.: 02010404 EAN: 8422248357364

NEW







- **Touch Control Panel** with automatic shut-down timer and cleaning filters indicator
- 6 extraction levels, 5 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **795m³/h** -201m³/h
- Motor maximum airflow free outlet: 1200m³/h
- Sound power (Reg.(EU) n°65/2014): **46dB(A)**, maximum: 64dB(A)
- BRUSHLESS motor. Extra silent. Maximum energy consumption **135W**
- **High efficiency STRIP LED lighting**, adjustable intensity
- **Energy Class: A+++**

TFH 6630 X

Cod.: 02010300 EAN: 8422248082365



- **Touch Control Panel** with digital display, automatic shut-down timer and cleaning filters indicator
- 6 extraction levels, 5 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **605m³/h** -210m³/h
- Motor maximum airflow free outlet: 1000m³/h
- Sound power (Reg.(EU) n°65/2014): **47dB(A)**, maximum: 64dB(A)
- BRUSHLESS motor. Extra silent. Maximum energy consumption **90W**
- **High efficiency STRIP LED lighting**, adjustable intensity
- **Energy Class: A+**



TFH 6630 BK

Cod.: 02010302 EAN: 8422248082402





- **Touch Control Panel** with digital display, automatic shut-down timer and cleaning filters indicator
- 6 extraction levels, 5 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **605m³/h** -210m³/h
- Motor maximum airflow free outlet: 1000m³/h
- Sound power (Reg.(EU) n°65/2014): **47dB(A)**, maximum: 64dB(A)
- BRUSHLESS motor. Extra silent. Maximum energy consumption **90W**
- **High efficiency STRIP LED lighting**, adjustable intensity
- **Energy Class: A+**

TFH 6630 WH

Cod.: 02010301 EAN: 8422248082396



- **Touch Control Panel** with digital display, automatic shut-down timer and cleaning filters indicator
- 6 extraction levels, 5 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **605m³/h** -210m³/h
- Motor maximum airflow free outlet: 1000m³/h
- Sound power (Reg.(EU) n°65/2014): **47dB(A)**, maximum: 64dB(A)
- BRUSHLESS motor. Extra silent. Maximum energy consumption **90W**
- **High efficiency STRIP LED lighting**, adjustable intensity
- **Energy Class: A+**






TFH 6430 X

Cod.: 02010609 EAN: 8422248343626



- **Touch Control Panel** with digital display, automatic shut-down timer and cleaning filters indicator
- 4 extraction levels, 3 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **391m³/h** - 164m³/h
- Motor maximum airflow free outlet: 1000m³/h
- Sound power (Reg.(EU) n°65/2014): **44dB(A)**, máximo: 62dB(A)
- BRUSHLESS motor. Extra silent. Maximum energy consumption **53W**
- **High efficiency STRIP LED lighting adjustable intensity**
- **Energy Class: A+**




TFH 6430 GBK

Cod.: 02010409 EAN: 8422248343602



- **Touch Control Panel** with digital display, automatic shut-down timer and cleaning filters indicator
- 4 extraction levels, 3 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **391m³/h** - 164m³/h
- Motor maximum airflow free outlet: 1000m³/h
- Sound power (Reg.(EU) n°65/2014): **44dB(A)**, máximo: 62dB(A)
- BRUSHLESS motor. Extra silent. Maximum energy consumption **53W**
- **High efficiency STRIP LED lighting adjustable intensity**
- **Energy Class: A+**




TFH 6430 GWH

Cod.: 02010009 EAN: 8422248343619



- **Touch Control Panel** with digital display, automatic shut-down timer and cleaning filters indicator
- 4 extraction levels, 3 + 1 **TURBO**
- Extraction power (according to UNE/EN 61591): **391m³/h** - 164m³/h
- Motor maximum airflow free outlet: 1000m³/h
- Sound power (Reg.(EU) n°65/2014): **44dB(A)**, máximo: 62dB(A)
- BRUSHLESS motor. Extra silent. Maximum energy consumption **53W**
- **High efficiency STRIP LED lighting adjustable intensity**
- **Energy Class: A+**




TF-2003 600 GBK

Cod.: 02017203 EAN: 8422248062015



- **Mechanical control panel**
- 2 extraction levels
- Extraction power (according to UNE/EN 61591): **390m³/h** - 150m³/h
- Motor maximum airflow free outlet: 600m³/h
- Sound power (Reg.(EU) n°65/2014): **45dB(A)**, maximum: 57dB(A)
- Tangential motor. Extra silent. Maximum energy consumption **100W**
- **High efficiency LED lighting**
- Energy Class: C




TF-2003 600 GWH

Cod.: 02017202 EAN: 8422248062008



- **Mechanical control panel**
- 2 extraction levels
- Extraction power (according to UNE/EN 61591): **390m³/h** - 150m³/h
- Motor maximum airflow free outlet: 600m³/h
- Sound power (Reg.(EU) n°65/2014): **45dB(A)**, maximum: 57dB(A)
- Tangential motor. Extra silent. Maximum energy consumption **100W**
- **High efficiency LED lighting**
- Energy Class: C




EXTENDER 900

Cod.: 02094306 EAN: 8422248110310



- **Mechanical control panel**
- 2 extraction levels
- Extraction power (according to UNE/EN 61591): **390m³/h** - 150m³/h
- Motor maximum airflow free outlet: 600m³/h
- Sound power (Reg.(EU) n°65/2014): **45dB(A)**, maximum: 57dB(A)
- Tangential motor. Extra silent. Maximum energy consumption **100W**
- **High efficiency LED lighting**
- Energy Class: C




EXTENDER 700

Cod.: 02089306 EAN: 8422248110327



- **Mechanical control panel**
- 2 extraction levels
- Extraction power (according to UNE/EN 61591): **390m³/h** - 150m³/h
- Motor maximum airflow free outlet: 600m³/h
- Sound power (Reg.(EU) n°65/2014): **45dB(A)**, maximum: 57dB(A)
- Tangential motor. Extra silent. Maximum energy consumption **100W**
- **High efficiency LED lighting**
- Energy Class: C




EXTENDER 600

Cod.: 02017606 EAN: 8422248110334



- **Mechanical control panel**
- 2 extraction levels
- Extraction power (according to UNE/EN 61591): **390m³/h** - 150m³/h
- Motor maximum airflow free outlet: 600m³/h
- Sound power (Reg.(EU) n°65/2014): **45dB(A)**, maximum: 57dB(A)
- Tangential motor. Extra silent. Maximum energy consumption **100W**
- **High efficiency LED lighting**
- Energy Class: C




TF-2003 DURALUM 900

Cod.: 02094305 EAN: 8422248061964



- **Mechanical control panel**
- 2 extraction levels
- Extraction power (according to UNE/EN 61591): **390m³/h** - 150m³/h
- Motor maximum airflow free outlet: 600m³/h
- Sound power (Reg.(EU) n°65/2014): **45dB(A)**, maximum: 57dB(A)
- Tangential motor. Extra silent. Maximum energy consumption **100W**
- **High efficiency LED lighting**
- Energy Class: C




TF-2003 DURALUM 700

Cod.: 02089305 EAN: 8422248061971



- **Mechanical control panel**
- 2 extraction levels
- Extraction power (according to UNE/EN 61591): **390m³/h** - 150m³/h
- Motor maximum airflow free outlet: 600m³/h
- Sound power (Reg.(EU) n°65/2014): **45dB(A)**, maximum: 57dB(A)
- Tangential motor. Extra silent. Maximum energy consumption **100W**
- **High efficiency LED lighting**
- Energy Class: C




TF-2003 DURALUM 600

Cod.: 02017305 EAN: 8422248061988



- **Mechanical control panel**
- 2 extraction levels
- Extraction power (according to UNE/EN 61591): **390m³/h** - 150m³/h
- Motor maximum airflow free outlet: 600m³/h
- Sound power (Reg.(EU) n°65/2014): **45dB(A)**, maximum: 57dB(A)
- Tangential motor. Extra silent. Maximum energy consumption **100W**
- **High efficiency LED lighting**
- Energy Class: C




TF-5260 X

Cod.: 02034310 EAN: 8422248082129



- **Sliding Control Panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **325m³/h** - 175m³/h (EU Model)
- Motor maximum airflow free outlet: 350m³/h
- Sound power (Reg.(EU) n°65/2014): **54dB(A)**, maximum: 68dB(A)
- 2 Motor. Maximum energy consumption **2 x 65W**
- **LED E-14 lighting**
- Energy Class: D




TF-5260 WH

Cod.: 02034501 EAN: 8422248082136



- **Sliding Control Panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **325m³/h** - 175m³/h (EU Model)
- Motor maximum airflow free outlet: 350m³/h
- Sound power (Reg.(EU) n°65/2014): **54dB(A)**, maximum: 68dB(A)
- 2 Motor. Maximum energy consumption **2 x 65W**
- **LED E-14 lighting**
- Energy Class: D




TFB-5160 X

Cod.: 02034606 EAN: 8422248101998



- **Mechanical control panel**
- 2 extraction levels
- Extraction power (according to UNE/EN 61591): **300m³/h** - 160m³/h
- Motor maximum airflow free outlet: 700m³/h
- Sound power (Reg.(EU) n°65/2014): **48dB(A)**, maximum: 61dB(A)
- Tangential motor. Extra silent. Maximum energy consumption **65W**
- **High efficiency Compact STRIP LED lighting**
- Energy Class: C




TFB-5160 BK

Cod.: 02034408 EAN: 8422248108096



- **Mechanical control panel**
- 2 extraction levels
- Extraction power (according to UNE/EN 61591): **300m³/h** - 160m³/h
- Motor maximum airflow free outlet: 700m³/h
- Sound power (Reg.(EU) n°65/2014): **48dB(A)**, maximum: 61dB(A)
- Tangential motor. Extra silent. Maximum energy consumption **65W**
- **High efficiency Compact STRIP LED lighting**
- Energy Class: C




TFB-5160 WH

Cod.: 02034107 EAN: 8422248102001



- **Mechanical control panel**
- 2 extraction levels
- Extraction power (according to UNE/EN 61591): **300m³/h** - 160m³/h
- Motor maximum airflow free outlet: 700m³/h
- Sound power (Reg.(EU) n°65/2014): **48dB(A)**, maximum: 61dB(A)
- Tangential motor. Extra silent. Maximum energy consumption **65W**
- **High efficiency Compact Strip LED lighting**
- Energy Class: C




TFB-5150 X

Cod.: 02097306 EAN: 8422248102018



- **Mechanical control panel**
- 2 extraction levels
- Extraction power (according to UNE/EN 61591): **300m³/h** - 160m³/h
- Motor maximum airflow free outlet: 700m³/h
- Sound power (Reg.(EU) n°65/2014): **48dB(A)**, maximum: 61dB(A)
- Tangential motor. Extra silent. Maximum energy consumption **65W**
- **High efficiency Strip LED lighting**
- Energy Class: C




TF-5250 X

Cod.: 02097305 EAN: 8422248086264



- **Sliding Control Panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **325m³/h** - 175m³/h
- Motor maximum airflow free outlet: 350m³/h
- Sound power (Reg.(EU) n°65/2014): **54dB(A)**, maximum: 68dB(A)
- 2 Motor. Maximum energy consumption **2 x 65W**
- **LED E-14 lighting**
- Energy Class: D




TF-5250 WH

Cod.: 02097002 EAN: 8422248086271



- **Sliding Control Panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **325m³/h** - 175m³/h
- Motor maximum airflow free outlet: 350m³/h
- Sound power (Reg.(EU) n°65/2014): **54dB(A)**, maximum: 68dB(A)
- 2 Motor. Maximum energy consumption **2 x 65W**
- **LED E-14 lighting**
- Energy Class: D




TF-5060 X

Cod.: 02033309 EAN: 8422248086059



- **Sliding Control Panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **197m³/h** - 96m³/h
- Motor maximum airflow free outlet: 350m³/h
- Sound power (Reg.(EU) n°65/2014): 51dB(A), maximum: 65dB(A)
- 1 Motor. Maximum energy consumption **65W**
- Max. pressure 325 Pa
- Energy Class: C




TFK 6000 X

Cod.: 02034608 EAN: 8422248357203



- **Mechanical control panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **390m³/h** - 186m³/h
- Motor maximum airflow free outlet: 600m³/h
- Sound power (Reg.(EU) n°65/2014): **54dB(A)**, maximum: 68dB(A)
- Maximum energy consumption **100W**
- High efficiency Strip Led lighting
- Energy Class: B




TFK 6000 WH

Cod.: 02034504 EAN: 8422248357210



- **Mechanical control panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **390m³/h** - 186m³/h
- Motor maximum airflow free outlet: 600m³/h
- Sound power (Reg.(EU) n°65/2014): **54dB(A)**, maximum: 68dB(A)
- Maximum energy consumption **100W**
- High efficiency Strip Led lighting
- Energy Class: B




TFK 6005 X

Cod.: 02034604 EAN: 8422248357234



- **Mechanical Control Panel**
- 2 extraction levels
- Extraction power (according to UNE/EN 61591): **390m³/h** - 186m³/h
- Motor maximum airflow free outlet: 600m³/h
- Sound power (Reg.(EU) n°65/2014): **54dB(A)**, maximum: 68dB(A)
- K11 motor. Maximum energy consumption **103W**
- High efficiency Strip Led lighting
- **Energy Class: A**




TFK 6005 WH

Cod.: 02034505 EAN: 8422248357227



- **Mechanical Control Panel**
- 2 extraction levels
- Extraction power (according to UNE/EN 61591): **162m³/h** - 108m³/h
- Motor maximum airflow free outlet: 600m³/h
- Sound power (Reg.(EU) n°65/2014): **49dB(A)**, maximum: 58dB(A)
- K11 motor. Maximum energy consumption **103W**
- High efficiency Strip Led lighting
- **Energy Class: A**




CONVENTIONAL

S-BOX X

Cod.: 02001301 EAN: 8422248062039



- **Mechanical control panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **390m³/h** - 150m³/h
- Motor maximum airflow free outlet: 600m³/h
- Sound power (Reg.(EU) n°65/2014): **45dB(A)**, maximum: 57dB(A)
- Tangential motor. Extra silent. Maximum energy consumption **100W**
- **Low consumption lighting 9W**
- **Energy Class: C**




LFK 6000 X

Cod.: 02011602 EAN: 8422248357180



- **Mechanical Control Panel**
- 2 extraction levels
- Extraction power (according to UNE/EN 61591): **162m³/h** - 108m³/h
- Motor maximum airflow free outlet: 350m³/h
- Sound power (Reg.(EU) n°65/2014): **49dB(A)**, maximum: 58dB(A)
- Maximum energy consumption **58W**
- E-14 LED lighting
- **Energy Class: B**




LFK 6000 WH

Cod.: 02011117 EAN: 8422248357197



- **Mechanical Control Panel**
- 2 extraction levels
- Extraction power (according to UNE/EN 61591): **162m³/h** - 108m³/h
- Motor maximum airflow free outlet: 350m³/h
- Sound power (Reg.(EU) n°65/2014): **49dB(A)**, maximum: 58dB(A)
- Maximum energy consumption **58W**
- E-14 LED lighting
- **Energy Class: B**




F-2050 X

Cod.: 02015306 EAN: 8422248086103



- **Mechanical control panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **195m³/h** - 108m³/h
- Motor maximum airflow free outlet: 350m³/h
- Sound power (Reg.(EU) n°65/2014): **56dB(A)**, maximum: 68dB(A)
- 1 motor x **60W**
- E-14 LED lighting
- **Energy Class: C**




F-2050 WH

Cod.: 02015006 EAN: 8422248086110



- **Mechanical control panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **195m³/h** - 108m³/h
- Motor maximum airflow free outlet: 350m³/h
- Sound power (Reg.(EU) n°65 /2014): **56dB(A)**, maximum: 68dB(A)
- 1 motor x **60W**
- E-14 LED lighting
- **Energy Class: C**




F-2290 X

Cod.: 02014302 EAN: 8422248168946



- **Sliding control panel**
- 3 extraction levels
- Minimum sound power: **59dB(A)**, maximum: 65dB(A)
- Motor maximum airflow free outlet: 380m³/h
- 2 motors. Maximum energy consumption **2 x 125W**




FK SLIM 6000 X

Cod.: 02011604 EAN: 8422248357241



- **Mechanical Control Panel**
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **162m³/h** - 108m³/h
- Motor maximum airflow free outlet: 350m³/h
- Sound power (Reg.(EU) n°65/2014): **49dB(A)**, maximum: 58dB(A)
- Maximum energy consumption **58W**
- E-14 LED lighting
- **Energy Class: B**




FK SLIM 6000 BK

Cod.: 02011504 EAN: 8422248357258

NEW



- Mechanical Control Panel
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **162m³/h** - 108m³/h
- Motor maximum airflow free outlet: 350m³/h
- Sound power (Reg.(EU) n°65/2014): **49dB(A)**, maximum: 58dB(A)
- Maximum energy consumption 58W
- E-14 LED lighting
- Energy Class: B




FK SLIM 6000 WH

Cod.: 02011204 EAN: 8422248357265

NEW



- Mechanical Control Panel
- 3 extraction levels
- Extraction power (according to UNE/EN 61591): **162m³/h** - 108m³/h
- Motor maximum airflow free outlet: 350m³/h
- Sound power (Reg.(EU) n°65/2014): **49dB(A)**, maximum: 58dB(A)
- Maximum energy consumption 58W
- E-14 LED lighting
- Energy Class: B



KITCHEN EXTRACTION

PROFESSIONAL-750


Cod.: 00117000 EAN: 8422248100816

PROFESSIONAL 750 L

Cod.: 00117100 EAN: 8422248100823



- Extraction power (according to UNE/EN 61591): **600m³/h**
- Sound power (Reg.(EU) n°65/2014): **49dB(A)**
- Maximum energy consumption:
 - **105W** (Professional 750 Model)
 - **119W** (Professional 750L Model)
- LED E-14 lighting (PROFESSIONAL 750L model)
- **Metal grease filter with plate to collect grease washable in dishwasher**
- Metal housing and plastic impeller.
- 120mm outlet diameter
- Energy Class: D




PROFESSIONAL 500

Cod.: 00117400 EAN: 8422248010832



- Extraction power (according to UNE/EN 61591): **450m³/h**
- Sound power (Reg.(EU) n°65/2014): **57dB(A)**
- Maximum energy consumption: **125W**
- **Metal grease filter with plate to collect grease washable in dishwasher**
- Plastic housing and impeller
- 100 mm outlet diameter
- Energy Class: D




GS-600 PLUS2 VEL.

Cod.: 00116110 EAN: 8422248006316



- 2 extraction levels
- Extraction power (according to UNE/EN 61591): **420/600m³/h**
- Sound power (Reg.(EU) n°65/2014): **52dB(A)**
- Maximum energy consumption: **105W**
- Metal housing and plastic impeller.
- **2 speeds switch that can be wall mounted**
- 120 mm outlet diameter
- Energy Class: C



GS-600


Cod.: 00116002 EAN: 8422248100601

GS-600 BK

Cod.: 00116400 EAN: 8422248357371



- Extraction power (according to UNE/EN 61591): **480m³/h**
- Sound power (Reg.(EU) n°65/2014): **50dB(A)**
- Maximum energy consumption: **105W**
- Metal housing and plastic impeller.
- 110 mm outlet diameter
- Energy Class: C




GS-400 M

Cod.: 00114102 EAN: 8422248100403



- Extraction power (according to UNE/EN 61591): **290m³/h**
- Sound power (Reg.(EU) n°65/2014): **52dB(A)**
- Maximum energy consumption: **60W**
- Metal housing and standard protection guard
- 110 mm outlet diameter
- Energy Class: B





GS-400 P

Cod.: 00111002 EAN: 8422248100830



- Extraction power (according to UNE/EN 61591): **290m³/h**
- Sound power (Reg.(EU) n°65/2014): **52dB(A)**
- Maximum energy consumption: **60W**
- Thermal plastic housing and standard protection guard
- 110 mm outlet diameter
- Energy Class: B



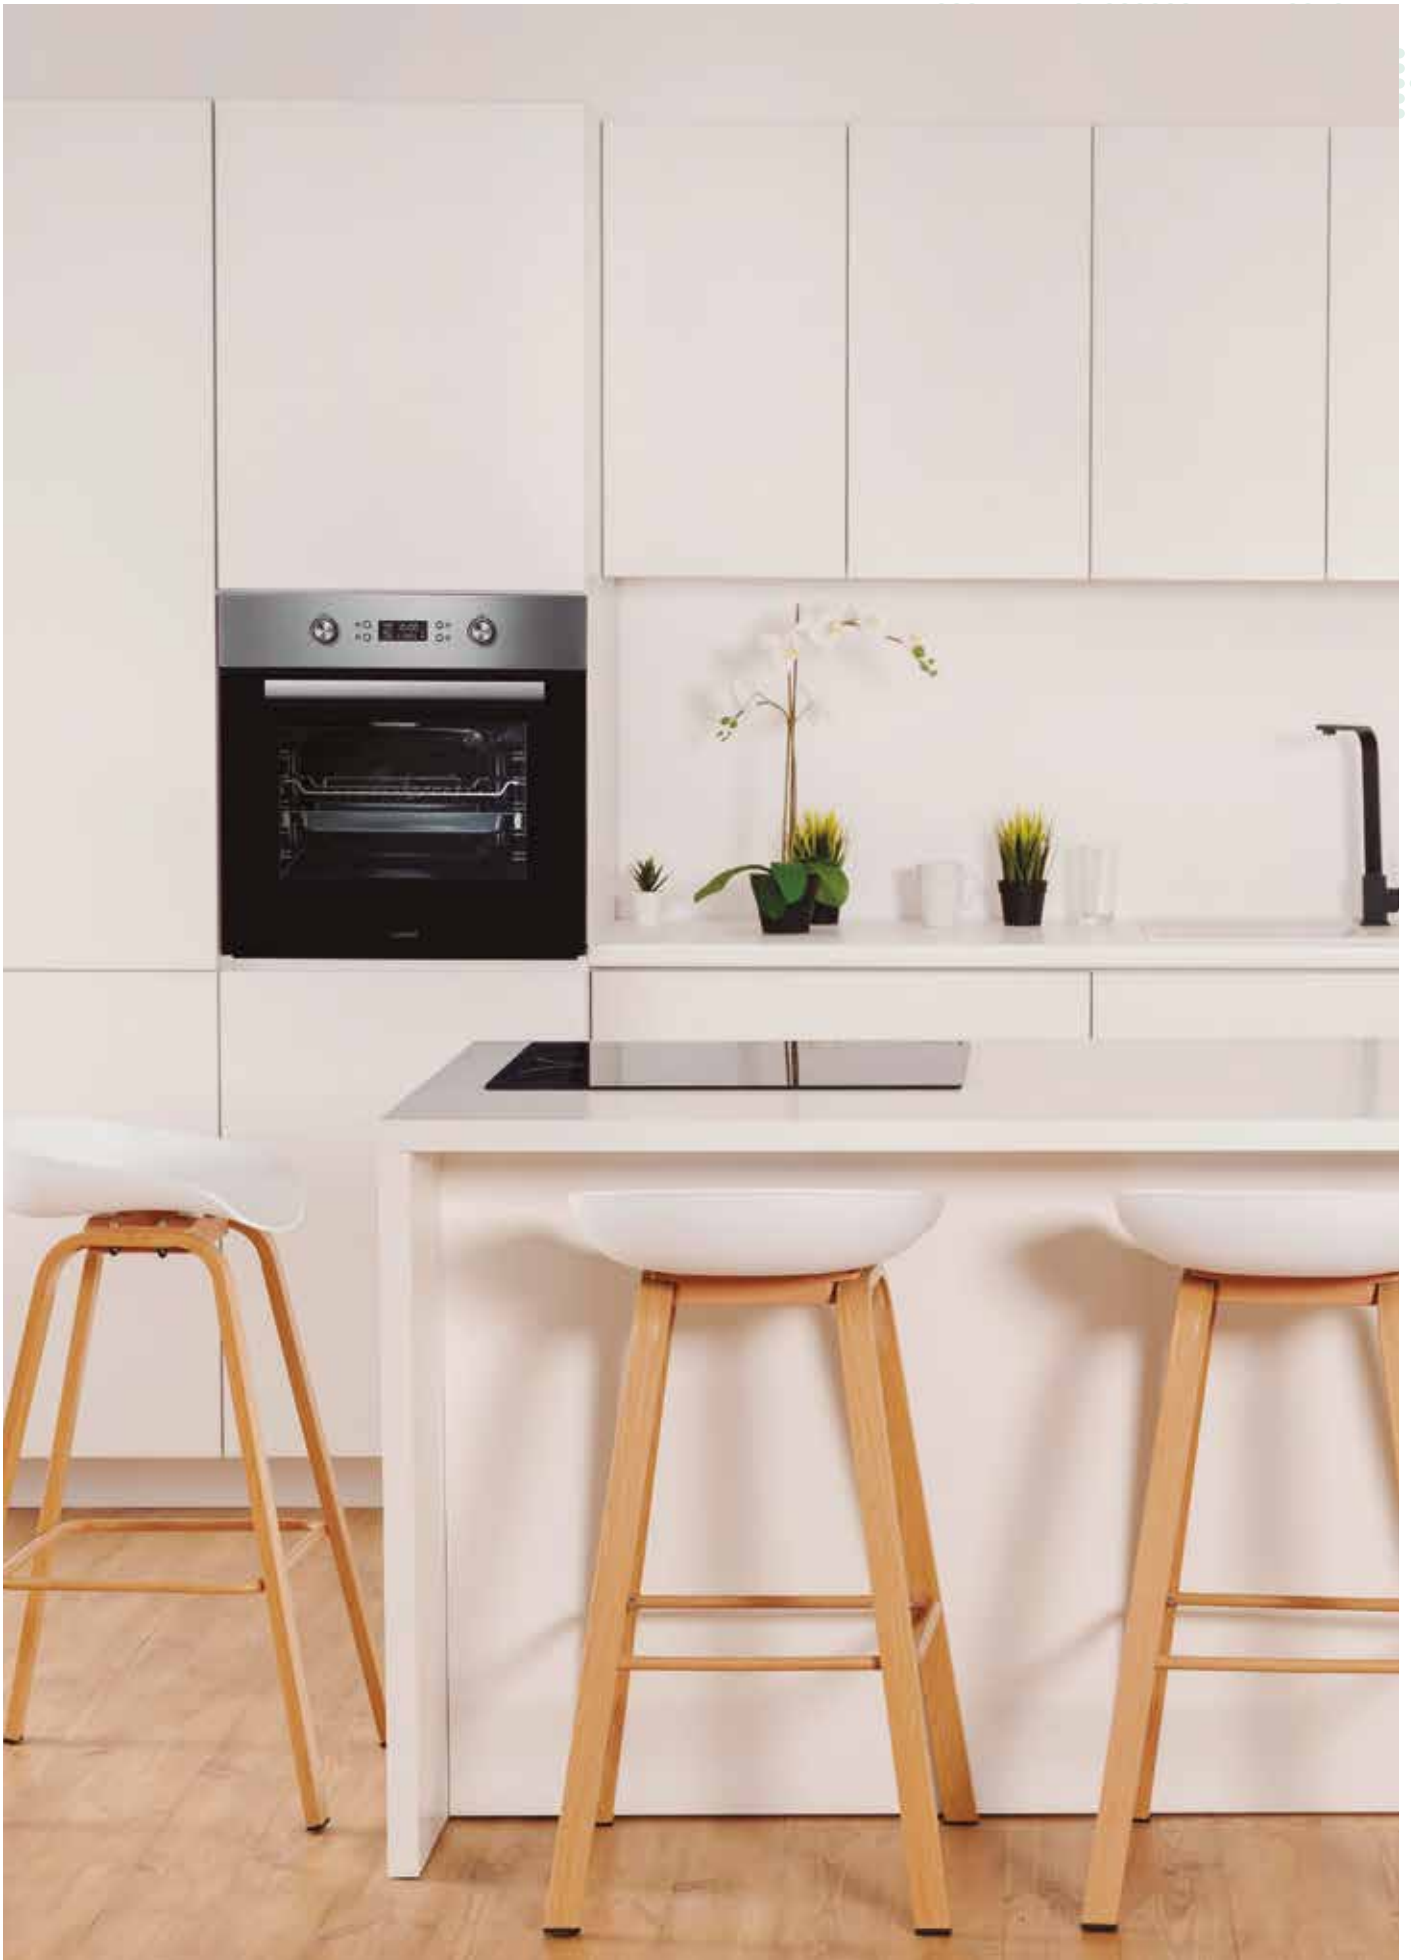


MULTIFUNCTION OVENS

MT 9011 PRO BK

Cod.: 07047400 EAN: 8422248080637



- Multifunction oven with Fan forced oven **14 functions**
- **TFT Control**
- **Recipes by El Celler de Can Roca**
- **Cooking Tables with function & Temperature** recommendation for extensive type of food
- Chromed support with 5 cooking levels
- 1 Telescopic guide full extension adaptable to any level
- Triple glazed cool door with tangential ventilation
- **Soft closing door**
- Accessories: **Deep tray**, tray and grid
- **Automatic AquaSmart Cleaning system**
- Net capacity **72 liters**
- **Energy class A**




MT 8012 BK

Cod.: 07002411 EAN: 8422248094009



- Multifunction oven with Fan forced oven **11 functions**
- **Touch control panel**
- Display cooking programmer with temperature and times
- Chromed support with 5 cooking levels
- 1 Telescopic guide full extension adaptable to any level
- 3 glazed cool door with tangential ventilation
- Accessories: **Deep tray**, tray, grid and pizza stone
- **Automatic AquaSmart Cleaning system**
- Net capacity **72 liters**
- **Energy Class A**




MT 8012 WH

Cod.: 07002412 EAN: 8422248094016



- Multifunction oven with Fan forced oven **11 functions**
- **Touch control panel**
- Display cooking programmer with temperature and times
- Chromed support with 5 cooking levels
- 1 Telescopic guide full extension adaptable to any level
- 3 glazed cool door with tangential ventilation
- Accessories: **Deep tray**, tray, grid and pizza stone
- **Automatic AquaSmart Cleaning system**
- Net capacity **72 liters**
- **Energy Class A**




PR 6011 XGBK

Cod.: 07001006 EAN: 8422248103350



- **Pyrolytic oven with Fan forced oven** 10 functions
- **Push/Pull controls**
- Display cooking programmer with temperature and times
- Chromed support with 5 cooking levels
- 1 **Telescopic guide** adaptable to any level 50%
- Glazed cool door with tangential ventilation 4 glasses
- Accessories: tray and grid
- **Pyrolytic cleaning with 2 levels (90/120 min)**
- Net capacity **70 liters**
- **Energy class A**




MDS 8008 X AIR FRYER

Cod.: 07001509 EAN: 8422248347846



- Multifunction oven with Fan forced oven - 8 functions
- **Push/Pull controls**
- Display cooking programmer
- **Airfry function**
- Chromed support with 5 cooking levels
- 1 **Telescopic guide adaptable to any level 50%**
- Glazed cool door with tangential ventilation 2 glasses
- Accessories: **Deep tray**, tray and grid
- Automatic AquaSmart Cleaning system
- Net capacity **80 liters**
- **Energy Class A**




MDS 8008 WH

Cod.: 07001010 EAN: 8422248347679



- Multifunction oven with Fan forced oven - 8 functions
- **Push/Pull controls**
- Display cooking programmer
- Chromed support with 5 cooking levels
- 1 **Telescopic guide adaptable to any level 50%**
- Glazed cool door with tangential ventilation 2 glasses
- Accessories: **Deep tray**, tray and grid
- Automatic AquaSmart Cleaning system
- Net capacity **80 liters**
- **Energy Class A**




MDS 8008 BK

Cod.: 07001405 EAN: 8422248347655



- Multifunction oven with Fan forced oven - 8 functions
- **Push/Pull controls**
- Display cooking programmer
- Chromed support with 5 cooking levels
- 1 **Telescopic guide adaptable to any level 50%**
- Glazed cool door with tangential ventilation 2 glasses
- Accessories: **Deep tray**, tray and grid
- Automatic AquaSmart Cleaning system
- Net capacity **80 liters**
- **Energy Class A**




MDS 8008 X

Cod.: 07001508 EAN: 8422248347662



NEW

- **Multifunction oven with Fan forced oven** - 8 functions
- **Push/Pull controls**
- Display cooking programmer
- Chromed support with 5 cooking levels
- **1 Telescopic guide adaptable to any level 50%**
- Glazed cool door with tangential ventilation 2 glasses
- Accessories: **Deep tray**, tray and grid
- Automatic AquaSmart Cleaning system
- Net capacity **80 liters**
- **Energy Class A**




MDS 8007 WH

Cod.: 07034101 EAN: 8422248347709



NEW

- **Multifunction oven** - 7 functions
- Display cooking programmer
- Chromed support with 5 cooking levels
- **1 Telescopic guide adaptable to any level 50%**
- Glazed cool door with tangential ventilation 2 glasses
- Accessories: **Deep tray**, tray and grid
- Net capacity **80 liters**
- **Energy Class A**




MDS 8007 BK

Cod.: 07034508 EAN: 8422248347693



NEW

- **Multifunction oven** - 7 functions
- Display cooking programmer
- Chromed support with 5 cooking levels
- **1 Telescopic guide adaptable to any level 50%**
- Glazed cool door with tangential ventilation 2 glasses
- Accessories: **Deep tray**, tray and grid
- Net capacity **80 liters**
- **Energy Class A**




MDS 8007 X

Cod.: 07034605 EAN: 8422248347686



NEW

- **Multifunction oven** - 7 functions
- Display cooking programmer
- Chromed support with 5 cooking levels
- **1 Telescopic guide adaptable to any level 50%**
- Glazed cool door with tangential ventilation 2 glasses
- Accessories: **Deep tray**, tray and grid
- Net capacity **80 liters**
- **Energy Class A**



STATIC OVENS


MES 8007 X

Cod.: 07044609 EAN: 8422248347716



NEW

- **Multifunction** - 7 functions
- **Mechanical cooking programmer** with automatic stop
- Chromed support with 5 cooking levels
- **1 Telescopic guide adaptable to any level 50%**
- Glazed cool door with tangential ventilation 2 glasses
- Accessories: **Deep tray** and grid
- Net capacity **80 liters**
- **Energy Class A**




SES 7104 X

Cod.: 07044350 EAN: 8422248347297



NEW

- **Static oven** - 4 functions +1
- **Mechanical cooking programmer** with automatic stop
- Chromed support with 5 cooking levels
- Glazed cool door with tangential ventilation 2 glasses
- Accessories: **Deep tray** and grid
- **AquaSmart Cleaning system**
- Net capacity **78 liters**
- **Energy Class A**




MD 6106X

Cod.: 07033303 EAN: 8422248076029



- **Multifunction oven** - 6 functions
- Display cooking programmer with temperature and times
- 5 levels for placing trays
- Double glazed cool door with tangential ventilation
- Accessories: tray and grid
- **AquaSmart Cleaning system**
- Net capacity **60 liters**
- **Energy Class A**




ME 6206 X

Cod.: 07007303 EAN: 8422248075886



- **Multifunction oven** - 6 functions
- **Mechanical cooking programmer**
- 5 levels for placing trays
- Double glazed cool door with tangential ventilation
- Accessories: tray and grid
- **AquaSmart Cleaning system**
- Net capacity **60 liters**
- **Energy Class A**



SES 6204 WH

Cod.: 07044105 EAN: 8422248347730



NEW

- **Static oven** - 4 functions
- **Mechanical cooking programmer** with automatic stop
- Chromed support with 5 cooking levels
- Glazed cool door with tangential ventilation 2 glasses
- Accessories: **Deep tray** and grid
- **AquaSmart Cleaning system**
- Net capacity 66 liters
- **Energy Class A**

SES 6004 BK

Cod.: 07044614 EAN: 8422248347839



NEW

- **Static oven** - 4 functions
- Chromed support with 5 cooking levels
- Glazed cool door with tangential ventilation 2 glasses
- Accessories: **Deep tray** and grid
- **AquaSmart Cleaning system**
- Net capacity 62 liters
- **Energy Class A**

SES 6004 WH

Cod.: 07044613 EAN: 8422248347754



NEW

- **Static oven** - 4 functions
- Chromed support with 5 cooking levels
- Glazed cool door with tangential ventilation 2 glasses
- Accessories: **Deep tray** and grid
- **AquaSmart Cleaning system**
- Net capacity 62 liters
- **Energy Class A**





SES 7004 X

Cod.: 07044351 EAN: 8422248347235



NEW

- **Static oven** - 4 functions
- Chromed support with 5 cooking levels
- Glazed cool door with tangential ventilation 2 glasses
- Accessories: **Deep tray** and grid
- Net capacity 65 liters
- **Energy Class A**




SE 6204 X

Cod.: 07044600 EAN: 8422248075831



- **Static oven** - 4 functions
- 5 levels for placing trays
- Double glazed cool door with tangential ventilation
- Accessories: Tray and grid
- Net capacity **65 liters**
- **Energy Class A**




RUSTIC OVENS

MRA 7108 BK

Cod.: 07035409 EAN: 8422248077026



- **Multifunction oven** - 7 functions
- **Mechanical cooking programmer**
- Temperature range 40°C-240°C
- Panoramic easy-to-clean full glass door with removable inner glass
- Double glazed cool door with tangential ventilation
- **AquaSmart cleaning system**
- Net capacity **60 liters**
- **Energy Class A**




MRA 7108 WH

Cod.: 07035009 EAN: 8422248077033



- **Multifunction oven** - 7 functions
- **Mechanical cooking programmer**
- Temperature range 40°C-240°C
- Panoramic easy-to-clean full glass door with removable inner glass
- Double glazed cool door with tangential ventilation
- **AquaSmart cleaning system**
- Net capacity **60 liters**
- **Energy Class A**






COMPACT OVENS

CMD 5008 X

Cod.: 07003307 EAN: 8422248067881



- Multifunction oven - 8 functions
- Push/Pull controls
- Digital cooking programmer
- 4 levels for placing easy-to-move trays
- 1 Telescopic guide full extension adaptable to any level
- Triple glazed cool door with tangential ventilation
- Accessories: **Deep tray** and grid
- **AquaSmart Cleaning system**
- Built into a 45 cm unit
- Net capacity 40 liters
- Energy Class A




MD 5008 WH

Cod.: 07003000 EAN: 8422248067898



- Multifunction oven - 8 functions
- Push/Pull controls
- Digital cooking programmer
- 4 levels for placing easy-to-move trays
- 1 Telescopic guide full extension adaptable to any level
- Triple glazed cool door with tangential ventilation
- Accessories: **Deep tray** and grid
- **AquaSmart Cleaning system**
- Built into a 45 cm unit
- Net capacity 40 liters
- Energy Class A




ME 4006X

Cod.: 07003305 EAN: 8422248067867



- Multifunction oven - 6 functions
- Mechanical cooking programmer
- 4 levels for placing easy-to-move trays
- Triple glazed cool door with tangential ventilation
- Accessories: tray and grid
- **AquaSmart Cleaning system**
- Built into a 45 cm unit
- Net capacity 40 liters
- Energy Class A




90cm WIDE OVEN

CMD 9208 BK

Cod.: 07039305 EAN: 8422248093156



- Multifunction oven - 8 functions
- Push/Pull controls
- Digital cooking programmer
- 5 levels for placing easy-to-move trays
- Triple glazed cool door
- Accessories: **Deep tray** and grid
- Net capacity 93 liters
- Energy Class A




SUITABLE FOR 50cm CABINET

CDP 780 AS BK

Cod.: 07001401 EAN: 8422248059503



- Multifunction oven - 8 functions
- Push/Pull controls
- Digital cooking programmer
- 4 levels for placing easy-to-move trays
- 1 telescopic guide
- Double glazed cool door with tangential ventilation
- Accessories: **Deep tray** and grid
- **AquaSmart Cleaning system**
- Net capacity 50 liters
- Energy Class A




CM 760 AS BK

Cod.: 07032307 EAN: 8422248059497



- Multifunction oven - 6 functions
- Mechanical cooking programmer
- 4 levels for placing easy-to-move trays
- Double glazed cool door with tangential ventilation
- Accessories: **Deep tray** and grid
- **AquaSmart Cleaning system**
- Net capacity 50 liters
- Energy Class A




CM 760 AS WH

Cod.: 07032002 EAN: 8422248058568



- Multifunction oven - 6 functions
- Mechanical cooking programmer
- 4 levels for placing easy-to-move trays
- Double glazed cool door with tangential ventilation
- Accessories: **Deep tray** and grid
- **AquaSmart Cleaning system**
- Net capacity 50 liters
- Energy Class A




MICROWAVES cata & Can Rocca

MC25 GTC BK

Cod.: 07510400 EAN: 8422248055277



- **25 litre** built-in microwave
- Simultaneous 1,000 W quartz grill
- Five power levels, 900 W output
- Timer from 0 to 95 minutes
- Automatic defrosting by time and weight
- 8 automatic access menus
- Fast start button




MC25 GTC WH

Cod.: 07510000 EAN: 8422248055260



- **25 litre** built-in microwave
- Simultaneous 1,000 W quartz grill
- Five power levels, 900 W output
- Timer from 0 to 95 minutes
- Automatic defrosting by time and weight
- 8 automatic access menus
- Fast start button




BUILT IN MICROWAVES

MC 32 DC

Cod.: 07510303 EAN: 8422248055253



- **32 litre** built-in microwave
- Simultaneous 1,100 W grill
- Five power levels, 900 W output
- **Convection fan 2,500W (total power)**
- Timer from 0 to 95 minutes
- Automatic defrosting by time and weight
- 10 automatic access menus
- Fast start button




MC25 D ENC

Cod.: 07510300 EAN: 8422248048453



- **25 litre** built-in microwave
- Simultaneous 1,000 W quartz grill
- Five power levels, 900 W output
- Timer from 0 to 95 minutes
- Automatic defrosting by time and weight
- 8 automatic access menus
- Fast start button




MMA20 WH

Cod.: 07510003 EAN: 8422248077187



- **20 litre** built-in microwave
- **Installation suitable for High Furniture**
- **Adjustable in height to fit with furniture**
- Simultaneous 1,000 W grill
- Five power levels, 800 W output
- Timer from 0 to 35 minutes
- Automatic defrosting by time and weight
- Fast start button




MMA20 X

Cod.: 07510308 EAN: 8422248077170



- **20 litre** built-in microwave
- **Installation suitable for High Furniture**
- **Adjustable in height to fit with furniture**
- Simultaneous 1,000 W grill
- Five power levels, 800 W output
- Timer from 0 to 35 minutes
- Automatic defrosting by time and weight
- Fast start button




MC20 D ENC

Cod.: 07510301 EAN: 8422248049450



- **20 litre** built-in microwave
- **Installation suitable for High Furniture**
- Simultaneous 1,000 W grill
- Five power levels, 800 W output
- Timer from 0 to 95 minutes
- Automatic defrosting by time and weight
- 8 automatic access menus
- Fast start button




MC20 IX

Cod.: 07510306 EAN: 8422248058476



- **20 litre** built-in microwave
- **Installation suitable for High Furniture**
- Simultaneous 1,000 W grill
- Five power levels, 800 W output
- Timer from 0 to 95 minutes
- Automatic defrosting by time and weight
- Fast start button




MW BI2505DCG X

Cod.: 07511306 EAN: 8422248108119



- 25 litre built-in microwave
- 1200 W grill
- Five power levels, 900 W output
- Timer from 0 to 60 minutes
- Defrosting by time and weight
- 8 auto cook menus




MW BI2505DCG BK

Cod.: 07511402 EAN: 8422248100151



- 25 litre built-in microwave
- 1200 W grill
- Five power levels, 900 W output
- Timer from 0 to 60 minutes
- Defrosting by time and weight
- 8 auto cook menus







INDUCTION cata & Can Rocca

IDF 9012 PRO BK

Cod.: 08024202 EAN: 8422248079631




- **5 cooking areas:** 4 zones of 210x200mm, 1 zone of Ø300mm. 2 modular zones of 210x400mm
- **5" TFT touch control**
- Temperature control functions Fast & Precise (40°C-180°C)
- **PRO connectivity for full control of the CATA PRO hoods**
- 9 adjustable power levels + Booster
- Pause Function
- Timer function for each area
- **Total power 9kW (limitable)**




IDF 8021 PRO BK

Cod.: 08081206 EAN: 8422248079648



- **4 cooking areas:** 2 zones of 210x200mm, 1 zone of Ø300mm, 1 zone of Ø180mm. 1 modular zone of 210x400mm
- **5" TFT touch control**
- Temperature control functions Fast & Precise (40°C-180°C)
- **PRO connectivity for full control of the CATA PRO hoods**
- 9 adjustable power levels + Booster
- Pause Function
- Timer function for each area
- **Total power 7.2kW (limitable)**




IDB 6003 PRO BK

Cod.: 08063102 EAN: 8422248077675



- **3 cooking areas:** 1 zone of Ø300mm, 1 zone of Ø230mm, 1 zone of Ø180mm.
- **5" TFT touch control**
- Temperature control functions Fast & Precise (40°C-180°C)
- **PRO connectivity for full control of the CATA PRO hoods**
- 9 adjustable power levels + Booster
- Pause Function
- Timer function for each area
- **Total power 7.1kW (limitable)**




GIGA 750 BK

Cod.: 08026001 EAN: 8422248054485



- **6 cooking areas:** 6 zones of 237x189mm. 1 modular zone of Ø400mm, 3 modular zones of 237x378mm
- **Slider Touch Control for each area**
- It has **three temperature functions**
- 9 adjustable power levels + Booster
- Timer function for each area
- **Total power 11kW**




GIGA 600 BK

Cod.: 08026002 EAN: 8422248059190



- **4 cooking areas:** 4 zones of 237x189mm. 1 modular zone of Ø400mm, 2 modular zones of 237x378mm
- **Slider Touch Control for each area**
- It has **three temperature functions**
- 9 adjustable power levels + Booster
- Timer function for each area
- **Total power 7.4kW**




GIGA 600 WH

Cod.: 08026003 EAN: 8422248059206



- **4 cooking areas:** 4 zones of 237x189mm. 1 modular zone of Ø400mm, 2 modular zones of 237x378mm
- **Slider Touch Control for each area**
- It has **three temperature functions**
- 9 adjustable power levels + Booster
- Timer function for each area
- **Total power 7.4kW**




GIGA 600 SD

Cod.: 08026609 EAN: 8422248069014



- **4 cooking areas:** 4 zones of 237x189mm. 1 modular zone of Ø400mm, 2 modular zones of 237x378mm
- **Slider Touch Control for each area**
- It has **three temperature functions**
- 9 adjustable power levels + Booster
- Timer function for each area
- **Total power 7.4kW**




INDUCTION & SURFACE COOKER HOOD

AS 750

Cod.: 08000405 EAN: 8422248109406



- **4 cooking areas:** 4 zones of 215x190mm. 2 modular zones of 215x380mm
- **Slider Touch Control** with acoustic warning
- 9 adjustable power levels + Booster
- Countdown alarm
- Heating/Keeping warm function
- **Timer function for each area**
- **Frontal bevel**
- **Total power (induction + extraction) 7.53kW**

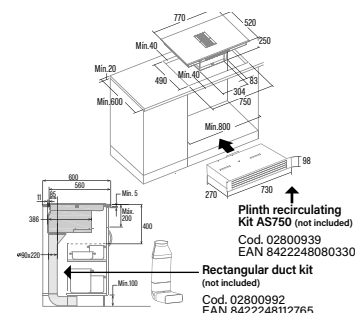

AS 600

Cod.: 08000406 EAN: 8422248198554



- **4 cooking areas:** 4 modular double areas measuring 215mm x 380mm of 3.7kW
- **Slider Touch Control** with acoustic warning
- **Touch Control with acoustic warning**
- 9 adjustable power levels + Booster
- Timer function for each area
- Countdown alarm
- Automatic pan detection
- Safety lock
- **Total power (induction + extraction) 7.53kW**

INSB 9012 BK

Cod.: 08024402 EAN: 8422248109413



- **5 cooking areas:** 4 zones of 210x200mm, 1 zone of Ø300mm. 2 modular zones of 210x400mm
- **Slider Touch Control** for each area
- It has **three temperature functions**
- 9 adjustable power levels + Booster
- Pause Function
- Timer function for each area
- **Total power 9kW**

INSB 8021 BK


Cod.: 08081401 EAN: 8422248109536







- **4 cooking areas:** 2 zones of 210x200mm, 1 zone of Ø300mm, 1 zone of Ø180mm. 1 modular zone of 210x400mm
- **Slider Touch Control** for each area
- It has **three temperature functions**
- 9 adjustable power levels + Booster
- Pause Function
- Timer function for each area
- **Total power 7.2kW**

INSB 6032 BK

Cod.: 08063404 EAN: 8422248109482



- **3 cooking areas:** 1 zone of Ø320/190mm, 1 zone of Ø210mm, 1 zone of Ø160mm
- **Continuous power regulation**
- **Slider Touch Control** for each area
- It has **three temperature functions**
- **AUTO connectivity for automatic control of the CATA AUTO hoods**
- 9 adjustable power levels + Booster
- Pause Function
- Timer function for each area
- **Total power 7.1kW**



INSB 6030 WH

Cod.: 08053000 EAN: 8422248108607



- **3 cooking areas:** 1 zone of Ø300/180mm, 1 zone of Ø210mm, 1 zone of Ø160mm
- **Continuous power regulation**
- **Slider Touch Control** for each area
- It has **three temperature functions**
- **AUTO connectivity for automatic control of the CATA AUTO hoods**
- 9 adjustable power levels + Booster
- Pause Function
- Timer function for each area
- **Total power 7.1kW (limitable)**

INSB 6028 BK

Cod.: 08063500 EAN: 8422248108577



- **3 cooking areas:** 1 zone of Ø280/180mm, 1 zone of Ø210mm, 1 zone of Ø160mm
- **Continuous power regulation**
- **Slider Touch Control** for each area
- It has **three temperature functions**
- **AUTO connectivity for automatic control of the CATA AUTO hoods**
- 9 adjustable power levels + Booster
- Pause Function
- Timer function for each area
- **Total power 7.1kW (limitable)**

INSB 6003 E2 BK

Cod.: 08063122 EAN: 8422248355735







- **3 cooking areas:** 1 zone of Ø300mm, 1 zone of Ø230mm, 1 zone of Ø180mm
- **Slider Touch Control** for each area
- It has **three temperature functions**
- 9 adjustable power levels + Booster
- Pause Function
- Timer function for each area
- **Installation without front ventilation slot**
- **Total power 7.1kW (limitable)**

INSB 6003 E2 WH

Cod.: 08063123 EAN: 8422248357159




- **3 cooking areas:** 1 zone of Ø300mm, 1 zone of Ø230mm, 1 zone of Ø180mm
- **Slider Touch Control** for each area
- It has **three temperature functions**
- 9 adjustable power levels + Booster
- Pause Function
- Timer function for each area
- **Installation without front ventilation slot**
- **Total power 7.1kW (limitable)**




IBS 6303 E2

Cod.: 08063116 EAN: 8422248351836

NEW



- **3 cooking areas:** 1 zone of Ø280mm, 1 zone of Ø210mm, 1 zone of Ø160mm
- **Slider Touch Control for each area**
- It has **three temperature functions**
- 9 adjustable power levels + Booster
- Timer function for each area
- **Automatic pan detection**
- Safety lock
- **Installation without front ventilation slot**
- **Total power 7.1kW (limitable)**




IB 6303 E2 BK

Cod.: 08063120 EAN: 8422248355919

NEW



- **3 cooking areas:** 1 zone of Ø280mm, 1 zone of Ø210mm, 1 zone of Ø160mm
- **Slider Touch Control with acoustic warning**
- It has **three temperature functions**
- 9 adjustable power levels + Booster
- Timer function for each area
- **Automatic pan detection**
- Safety lock
- **Installation without front ventilation slot**
- **Total power 7.1kW (limitable)**




ISB 603 BK

Cod.: 08073212 EAN: 8422248112703



- **3 cooking areas:** 1 zone of Ø280mm, 1 zone of Ø210mm, 1 zone of Ø160mm
- **Slider Touch Control with acoustic warning**
- 9 adjustable power levels + Booster
- Timer function for each area
- **Total power 7.1kW**




INSB 6004 BK

Cod.: 08040406 EAN: 8422248079594



- **4 cooking areas:** 1 booster zone of Ø185mm, 1 booster zone of Ø200mm, 1 booster zone of Ø225mm and 1 booster zone of Ø185mm
- **Sliding Touch Control**
- 9 adjustable power levels + Booster
- Timer function for each area
- **Total power 7.2kW**



IB 6403 E2 BK


Cod.: 08063121 EAN: 8422248355926



NEW



- **3 cooking areas:** 1 zone of Ø250mm, 1 zone of Ø180mm, 1 zone of Ø160mm
- **Slider Touch Control with acoustic warning**
- It has **three temperature functions**
- **AUTO connectivity for automatic control of the CATA AUTO hoods**
- 9 adjustable power levels + Booster
- Timer function for each area
- **Automatic pan detection**
- Safety lock
- **Installation without front ventilation slot**
- **Total power 5.3kW (limitable)**




IB 5003 BK

Cod.: 08074007 EAN: 8422248094191



- **3 cooking areas:** 1 zone of Ø280mm, 1 zone of Ø210mm, 1 zone of Ø160mm
- **Touch Control with acoustic warning**
- 9 adjustable power levels + Booster
- Timer function for each area
- **Total power 7.1kW**
- **Automatic pan detection**
- Safety lock




IB 6304 E2 BK

Cod.: 08001206 EAN: 8422248355278

NEW



- **4 cooking areas:** 4 cooking areas: 2 zone of Ø180mm, 2 zones of Ø160mm
- **Touch Control with acoustic warning**
- It has **three temperature functions**
- 9 adjustable power levels + Booster
- Timer function for each area
- Countdown alarm
- **Automatic pan detection**
- Safety lock
- **Adjusting the power, max. 7kW**



IB 6324 E2 BK


Cod.: 08063119 EAN: 8422248355704



NEW



- **4 cooking areas:** 1 zone of Ø250mm, 1 zone of Ø180mm, 2 zone of Ø160mm
- **Slider Touch Control with acoustic warning**
- Keeping warm (65-70°C)
- **AUTO connectivity for automatic control of the CATA AUTO hoods**
- 9 adjustable power levels + Booster
- Timer function for each area
- **Automatic pan detection**
- Safety lock
- **Installation without front ventilation slot**
- **Total power 7kW (limitable)**



IB 853 BK

Cod.: 08081210 EAN: 8422248109529



- **3 cooking areas:** 1 zone of Ø270mm, 1 zone of Ø220mm, 1 zone of Ø180mm
- **Touch Control with acoustic warning**
- 9 adjustable power levels + Booster
- Timer function for each area
- **Total power 6.7kW**

IB 753 BK

Cod.: 08081202 EAN: 8422248054478



- **3 cooking areas:** 1 zone of Ø270mm, 1 zone of Ø220mm, 1 zone of Ø180mm
- **Touch Control with acoustic warning**
- 9 adjustable power levels + Booster
- Timer function for each area
- **Total power 6.7kW**

IB 073 BK

Cod.: 08081100 EAN: 8422248075473







- **3 cooking areas:** 1 zone of Ø270mm, 1 zone of Ø220mm, 1 zone of Ø180mm
- **Slider Touch Control with acoustic warning**
- 9 adjustable power levels + Booster
- Timer function for each area
- **Total power 6.7kW**

IB 772

Cod.: 08027206 EAN: 8422248091787



- **2 cooking areas:** 1 zone of Ø270mm, 1 zone of Ø200mm
- **Slider Touch Control with acoustic warning**
- 9 adjustable power levels + Booster
- Timer function for each area
- **Total power 6kW**



IB 4003 BK

Cod.: 08060004 EAN: 8422248357395



- **3 cooking areas:** 1 zone of Ø210mm, 1 zone of Ø180mm, 1 zone of Ø160mm
- **Touch Control with acoustic warning**
- Melting / Defrosting (45-55°C)
- Heating / Keeping warm (65-70°C)
- Simmering (85-95°C)
- 9 adjustable power levels + Booster
- Timer function for each area
- **Automatic pan detection**
- Safety lock
- **Adjusting the power, max. 5.3kW**

IB 302 BK

Cod.: 08003209 EAN: 8422248092135



- **2 cooking areas:** 1 zone of Ø180mm, 1 zone of Ø160mm
- **Slider Touch Control with acoustic warning**
- 9 adjustable power levels + Booster
- Timer function for each area
- **Automatic pan detection**
- Safety lock
- **Total power 3.7kW**

IB2 PLUS BK

Cod.: 08027208 EAN: 8422248109420







- **2 cooking areas:** 1 zone of Ø220mm, 1 zone of Ø180mm
- **Touch Control with acoustic warning**
- 9 adjustable power levels + Booster
- Timer function for each area
- **Total power 3.7kW**

ISB 3102 BK

Cod.: 08003405 EAN: 8422248109314



- **2 cooking areas:** 1 zone of Ø200mm, 1 zone of Ø180mm
- **Slider Touch Control with acoustic warning**
- 9 adjustable power levels + Booster
- Timer function for each area
- **Total power 3.5kW**



HIGH LIGHT HOBS



TDM 6003

Cod.: 08063413 EAN: 8422248357357

NEW



- **3 High Light cooking areas:** 1 zone of $\varnothing 280/200$ mm, 1 zone of $\varnothing 180$ mm, 1 zone of $\varnothing 140$ mm
- **Slider Touch Control for each area**
- 9 adjustable power levels
- Timer
- Automatic safety switch-off
- Safety lock
- **Total power 5.4kW**

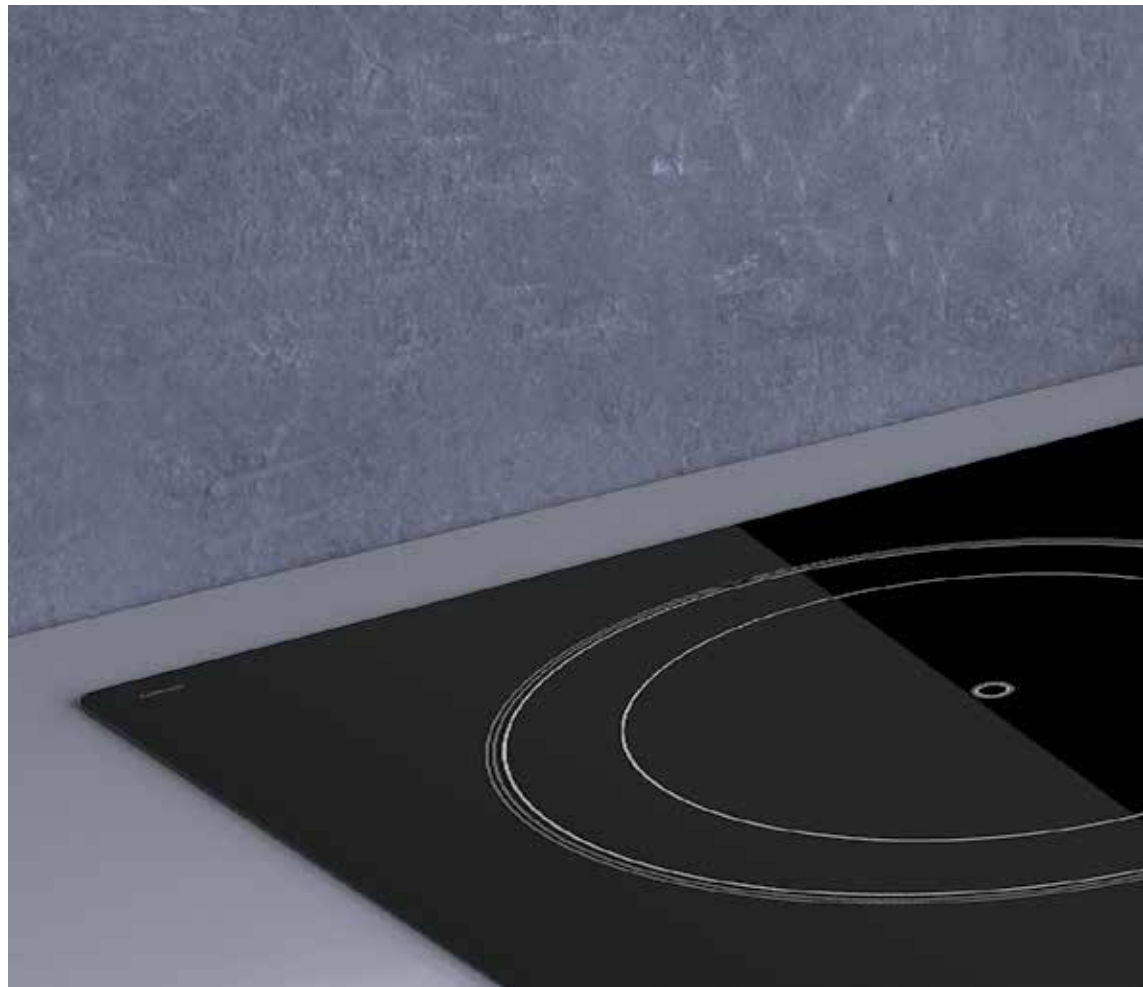


HIGH LIGHT HOBS

TN 604

Cod.: 08040011 EAN: 8422248109321



- **4 cooking areas:** 2 zone of $\varnothing 180$ mm, 2 zone of $\varnothing 140$ mm
- **Touch Control with acoustic warning**
- 9 adjustable power levels
- Timer
- Safety Lock
- Residual heat indicator
- **Total power 6kW**




604 HVI

Cod.: 08072202 EAN: 8422248109505



- **4 cooking areas:** 2 zone of $\varnothing 195$ mm, 2 zone of $\varnothing 160$ mm
- **Mechanical controls**
- 9 adjustable power levels
- Residual heat indicator
- **Total power 6kW**




TT 6003

Cod.: 08063212 EAN: 8422248109475



- **3 cooking areas:** 1 zone of $\varnothing 280/220/150$ mm, 1 zone of $\varnothing 185$ mm, 1 zone of $\varnothing 150$ mm
- **Touch Control with acoustic warning**
- 9 adjustable power levels
- Timer
- Automatic safety switch-off
- Safety lock
- **Total power 5.7kW**




TD 6003 BK

Cod.: 08063411 EAN: 8422248109499



- **3 cooking areas:** 1 zone of $\varnothing 270/210$ mm, 1 zone of $\varnothing 180$ mm, 1 zone of $\varnothing 140$ mm
- **Touch Control with acoustic warning**
- 9 adjustable power levels
- Timer
- Safety lock
- Residual heat indicator
- **Total power 5.4kW**






TT 5003

Cod.: 08077001 EAN: 8422248109512



- **3 High Light cooking areas:** 1 zone of $\varnothing 280/220/155\text{mm}$, 1 zone of $\varnothing 185\text{mm}$, 1 zone of $\varnothing 150\text{mm}$
- **Touch Control with acoustic warning**
- 9 adjustable power levels
- Safety lock
- Residual heat indicator
- **Total power 5.7kW**




TT 4003 BK

Cod.: 08060001 EAN: 8422248357388



- **3 cooking areas:** 1 zone of $\varnothing 280/200\text{mm}$, 1 zone of $\varnothing 180\text{mm}$, 1 zone of $\varnothing 140\text{mm}$
- **Touch Control with acoustic warning**
- 9 adjustable power levels
- Automatic safety switch-off
- Safety lock
- **Total power 5.3kW**




TD 3002 BK

Cod.: 08060405 EAN: 8422248109444



- **2 cooking areas:** 1 zone of $\varnothing 190/120\text{mm}$, 1 zone of $\varnothing 155\text{mm}$
- **Touch Control with acoustic warning**
- 9 adjustable power levels
- Timer
- Safety lock
- Residual heat indicator
- **Total power 3.2 kW**




VI 302

Cod.: 08049007 EAN: 8422248109437



- **2 cooking areas:** 1 zone of $\varnothing 195\text{mm}$, 1 zone of $\varnothing 160\text{mm}$
- **Mechanical control**
- 9 adjustable power levels
- Residual heat indicator
- **Total power 3kW**



GAS-ON-GLASS HOBS

LCI 9041 BK

Cod.: 08005404 EAN: 8422248081924





- **5 gas burners:**
- Rear Left: 1 semi-fast of 1.75kW
- Front Left: 1 semi-fast of 1.75kW
- Center: **1 triple ring** of 3.5kW
- Rear Right: 1 fast of 3kW
- Front Right: 1 auxiliary of 1kW
- One hand automatic ignition
- Flame failure gas cut off safety system
- **Cast iron Grids/burners**
- Suitable for city gas
- LPG nozzles included in the box
- **Total Power 11KW**

L-7005 CI

Cod.: 08046410 EAN: 8422248081962



- **5 gas burners:**
- Rear Left: 1 auxiliary of 1kW
- Front Left: 1 semi-fast of 1.75kW
- Center: **1 triple ring** of 3.5kW
- Rear Right: 1 fast of 3kW
- Front Right: 1 semi-fast of 1,75kW
- One hand automatic ignition
- Flame failure gas cut off safety system
- **Cast iron Grids/burners**
- Suitable for city gas
- LPG nozzles included in the box
- **Total Power 11KW**



LCI 6031 WH

Cod.: 08041100 EAN: 8422248072557

LCI 6031 BK

Cod.: 08041500 EAN: 8422248072724

LCIB 6031 BK

Cod.: 08041503 EAN: 8422248078788

CCI 6031 BK


Cod.: 08041501 EAN: 8422248073691



- **4 gas burners:**
- Rear: 1 fast of 3kW
- Front: 1 semi-fast of 1.75kW
- Right: **1 triple ring** of 3.5kW
- Left: 1 auxiliary of 1kW
- One hand automatic ignition
- Flame failure gas cut off safety system
- **Cast iron Grids/burners**
- Suitable for city gas
- LPG nozzles included in the box
- **Total Power 9,25KW**







- **4 gas burners:**
- Rear: 1 fast of 3kW
- Front: 1 semi-fast of 1.75kW
- Right: **1 triple ring** of 3.5kW
- Left: 1 auxiliary of 1kW
- One hand automatic ignition
- Flame failure gas cut off safety system
- **Cast iron Grids/burners**
- Suitable for city gas
- LPG nozzles included in the box
- **Total Power 9,25KW**



- **4 gas burners:**
- Rear: 1 fast of 3kW
- Front: 1 semi-fast of 1.75kW
- Right: **1 triple ring** of 3.5kW
- Left: 1 auxiliary of 1kW
- One hand automatic ignition
- Flame failure gas cut off safety system
- **Cast iron Grids/burners**
- Exclusive Use for LPG Gas
- **Total Power 9,25KW**



- **4 gas burners:**
- Rear Left: 1 semi-fast of 1.75kW
- Front Left: **1 triple ring** of 3.5kW
- Rear Right: 1 semi-fast of 1.75kW
- Front Right: 1 auxiliary of 1kW
- One hand automatic ignition
- Flame failure gas cut off safety system
- **Cast iron Grids/burners**
- Suitable for city gas
- LPG nozzles included in the box
- **Total power 8kW**



CI 631 BK

Cod.: 08041412 EAN: 8422248058681



- 4 gas burners:
- Rear Left: 1 semi-fast of 1.75kW
- Front Left: 1 triple ring of 3.5kW
- Rear Right: 1 semi-fast of 1.75kW
- Front Right: 1 auxiliary of 1kW
- One hand automatic ignition
- Flame failure gas cut off safety system
- Enamelled Grids/burners
- Suitable for city gas
- LPG nozzles included in the box
- Total power 8kW

CIB 6031 BK

Cod.: 08068400 EAN: 8422248068352



- 4 gas burners:
- Rear Left: 1 semi-fast of 1.75kW
- Front Left: 1 triple ring of 3.5kW
- Rear Right: 1 semi-fast of 1.75kW
- Front Right: 1 auxiliary of 1kW
- One hand automatic ignition
- Flame failure gas cut off safety system
- Enamelled Grids/burners
- Exclusive Use for LPG Gas
- Total power 8kW

LCI 6021 BK

Cod.: 08068401 EAN: 8422248068376







- 3 gas burners:
- Rear Right: 1 semi-fast of 1.75kW
- Front Right: 1 auxiliary of 1kW
- Left: 1 triple ring of 3.5kW
- One hand automatic ignition
- Flame failure gas cut off safety system
- Cast iron Grids/burners
- Suitable for city gas
- LPG nozzles included in the box
- Total power 6.25kW

LCIB 6021 BK

Cod.: 08068403 EAN: 8422248078795



- 3 gas burners:
- Rear Right: 1 semi-fast of 1.75kW
- Front Right: 1 auxiliary of 1kW
- Left: 1 triple ring of 3.5kW
- One hand automatic ignition
- Flame failure gas cut off safety system
- Cast iron Grids/burners
- Exclusive Use for LPG Gas
- Total power 6.25kW



SCI 6021 BK

Cod.: 08068405 EAN: 8422248086929



- 3 gas burners:
- Rear Right: 1 semi-fast of 1.75kW
- Front Right: 1 auxiliary of 1kW
- Left: 1 triple ring of 3.5kW
- One hand automatic ignition
- Flame failure gas cut off safety system
- Cast iron Grids/burners
- Suitable for city gas
- LPG nozzles included in the box
- Total power 6.25kW

CCI 6021 BK

Cod.: 08068501 EAN: 8422248073707



- 3 gas burners:
- Rear Right: 1 semi-fast of 1.75kW
- Front Right: 1 auxiliary of 1kW
- Left: 1 triple ring of 3.5kW
- One hand automatic ignition
- Flame failure gas cut off safety system
- Cast iron Grids/burners
- Suitable for city gas
- LPG nozzles included in the box
- Total power 6.25kW

CI 6021 BK

Cod.: 08068309 EAN: 8422248067355







- 3 gas burners:
- Rear Right: 1 semi-fast of 1.75kW
- Front Right: 1 auxiliary of 1kW
- Left: 1 triple ring of 3.5kW
- One hand automatic ignition
- Flame failure gas cut off safety system
- Enamelled Grids/burners
- Suitable for city gas
- LPG nozzles included in the box
- Total power 6.25kW

CIB 6021 BK

Cod.: 08068402 EAN: 8422248073677



- 3 gas burners:
- Rear Right: 1 semi-fast of 1.75kW
- Front Right: 1 auxiliary of 1kW
- Left: 1 triple ring of 3.5kW
- One hand automatic ignition
- Flame failure gas cut off safety system
- Enamelled Grids/burners
- Exclusive Use for LPG Gas
- Total power 6.25kW




CCI 5003 BK

Cod.: 08041505 EAN: 8422248094269



- **3 gas burners:**
- Rear Right: 1 semi-fast of 1.75kW
- Front Right: 1 auxiliary of 1kW
- Left: **1 triple ring** of 3.5kW
- One hand automatic ignition
- Flame failure gas cut off safety system
- **Cast iron Grids/burners**
- Suitable for city gas
- LPG nozzles included in the box
- **Total power 6.25kW**




SCI 3002 BK

Cod.: 08047410 EAN: 8422248093743




- **2 gas burners:**
- Rear: 1 fast of 3kW
- Front: 1 auxiliary of 1kW
- One hand automatic ignition
- Flame failure gas cut off safety system
- **Cast iron Grids/burners**
- Suitable for city gas
- LPG nozzles included in the box
- **Total Power 4kW**




RUSTIC GAS-ON-GLASS HOB

RCI 631 BK

Cod.: 08028403 EAN: 8422248055024



- **4 gas burners:**
- Rear Left: **1 triple ring** of 3.5kW
- Front Left: 1 semi-fast of 1.75kW
- Rear Right: 1 semi-fast of 1.75kW
- Front Right: 1 auxiliary of 1kW
- One hand automatic ignition
- Flame failure gas cut off safety system
- **Cast iron Grids/burners**
- Suitable for city gas
- LPG nozzles included in the box
- **Total power 8kW**




STAINLESS STEEL GAS HOBS

LGI 9041 X

Cod.: 08005350 EAN: 8422248081948



- **5 gas burners:**
- Rear Left: 1 fast of 3kW
- Front Left: 1 semi-fast of 1.75kW
- Center: **1 triple ring** of 3.5kW
- Rear Right: 1 semi-fast of 1.75kW
- Front Right: 1 auxiliary of 1kW
- One hand automatic ignition
- Flame failure gas cut off safety system
- **Cast iron Grids/burners**
- Suitable for city gas
- LPG nozzles included in the box
- **Total Power 11kW**





LGI 7041 X

Cod.: 08045305 EAN: 8422248108812



- **5 gas burners:**
- Rear Left: 1 Semi-fast 1.75 kW
- Front Left: 1 auxiliary 1 kW
- Centre: **1 triple ring**, 3.5kW
- Rear Right: 1 fast 3 kW
- Front Right: 1 semi-fast, 1.75kW
- One hand automatic ignition
- Flame failure gas cut off safety system
- **Cast iron Grids/burners**
- Suitable for city gas
- LPG nozzles included in the box
- **Total Power 11kW**






LGD 631 X

Cod.: 08066002 EAN: 8422248058735



- **4 gas burners:**
- Rear: 1 semi-fast, 1,75kW
- Front: 1 auxiliary, 1kW
- Right: 1 triple ring, 3.5kW
- Left: 1 fast, 3kW
- One hand automatic ignition
- Flame failure gas cut off safety system
- **Cast Iron Grids/burners**
- Suitable for city gas
- LPG nozzles included in the box
- **Total Power 9.25kW**




GI 6031 X

Cod.: 08066011 EAN: 8422248067331



- **4 gas burners:**
- Rear Left: 1 semi-fast, 1,75kW
- Front Left: 1 triple ring of 3.5kW
- Rear Right: 1 semi-fast, 1,75kW
- Front Right: 1 auxiliary, 1kW
- One hand automatic ignition
- Flame failure gas cut off safety system
- **Enamelled Grids/burners**
- Suitable for city gas
- LPG nozzles included in the box
- **Total power 8kW**




GI 6004 X

Cod.: 08066600 EAN: 8422248067775



- **4 gas burners:**
- Rear Left: 1 semi-fast, 1,75kW
- Front Left: 1 fast, 3kW
- Rear Right: 1 semi-fast, 1,75kW
- Front Right: 1 auxiliary, 1kW
- One hand automatic ignition
- Flame failure gas cut off safety system
- **Enamelled Grids/burners**
- Suitable for city gas
- LPG nozzles included in the box
- **Total power 7.5kW**




GIB 6004 X

Cod.: 08066312 EAN: 8422248068369



- **4 gas burners:**
- Rear Left: 1 semi-fast, 1,75kW
- Front Left: 1 fast, 3kW
- Rear Right: 1 semi-fast, 1,75kW
- Front Right: 1 auxiliary, 1kW
- One hand automatic ignition
- Flame failure gas cut off safety system
- **Enamelled Grids/burners**
- Exclusive Use for LPG Gas
- **Total power 7.5kW**




GI 6021 X

Cod.: 08068308 EAN: 8422248067348



- **3 gas burners:**
- Left: 1 triple ring, 3.5kW
- Rear: 1 semi-fast, 1,75kW
- Front: 1 auxiliary, 1kW
- One hand automatic ignition
- Flame failure gas cut off safety system
- **Enamelled Grids/burners**
- Suitable for city gas
- LPG nozzles included in the box
- **Total power 6.25kW**




GIB 6021 X

Cod.: 08068310 EAN: 8422248073684



- **3 gas burners:**
- Left: 1 triple ring, 3.5kW
- Rear: 1 semi-fast, 1,75kW
- Front: 1 auxiliary, 1kW
- One hand automatic ignition
- Flame failure gas cut off safety system
- **Enamelled Grids/burners**
- Exclusive Use for LPG Gas
- **Total power 6.25kW**




GI 3002 X

Cod.: 08039600 EAN: 8422248108829



- **2 gas burners:**
- Rear: 1 fast of 3kW
- Front: 1 auxiliary of 1kW
- One hand automatic ignition
- Flame failure gas cut off safety system
- **Enamelled Grids/burners**
- Suitable for city gas
- LPG nozzles included in the box
- **Total Power 4kW**




KITCHENWARE

SET NEW YORK

Cod.: 03000005 EAN: 8422248080583



- Stainless Steel Collection 5 piece set.
- Stainless Steel Handles welded to the pan, that provides a long life and better resistance.
- High Resistant glass lids.
- Straight lines, elegant and practical design for easy cleaning.
- Suitable for all types on hobs, gas, electric, vitroceramic and induction.
- Suitable for cleaning in the dishwasher machine.




SET PROFESSIONAL

Cod.: 03000006 EAN: 8422248085885



- Stainless Steel Collection 4 piece set.
- Stainless Steel Handles welded to the pan, that provides a long life and better resistance.
- High Resistant glass lids.
- Straight lines, elegant and practical design for easy cleaning.
- Suitable for all types on hobs, gas, electric, vitroceramic and induction.
- Suitable for cleaning in the dishwasher machine.




CAST IRON GRILL

Cod.: 03017400 EAN: 8422248082563



- Suitable for induction.
- Enamelled Cast Iron. Grill.
- Nonstick surface
- Ideal for: searing meat and fish with minimum of fat. Grilling vegetables and fruit.
- Good heat retention and temperature stability.
- Robust and durable.
- Easy to clean




BUILT-IN DISHWASHERS

LVI 62014

Cod.: 07200078 EAN: 8422248351379



- 14 place settings
- Energy class D drying and cleaning A
- 3rd layer cutlery basket
- 47 dB(A) noise level
- 8 programs: Intensive, auto, normal, ECO, glass, Express 90', Quick 30'
- Functions: Program delay 24 h, half load, extradry.
- automatic opening




LVI 48010

Cod.: 07200080 EAN: 8422248351393



- 10 place settings
- Energy class D drying and cleaning A
- 3rd layer cutlery basket
- 47 dB(A) noise level
- 8 programs: Intensive, Auto, normal, ECO, Glass, Express 90', Quick 30'
- Functions: Program delay 324 h, half load, extradry.
- automatic opening




LVI 62012

Cod.: 07200079 EAN: 8422248351386



- 14 place settings
- Energy class E drying and cleaning A
- 47 dB(A) noise level
- 8 programs: Intensive, auto, normal, ECO, glass, Express 90', Quick 30'
- Functions: Program delay 24 h, half load, extradry, stop/pause




LVI 47010

Cod.: 07820081 EAN: 8422248351409



- 10 place settings
- Energy class E drying and cleaning A
- 47 dB(A) noise level
- 8 programs: Intensive, auto, normal, ECO, glass, Express 90', Quick 30'
- Functions: Program delay 24 h, half load, extradry.




BUILT-IN WASHING MACHINE

LI 08014

Cod.: 07900002 EAN: 8422248096942



- 8 Kgs capacity
- 1400 rpm
- Energy class B
- Washing programs: 16
- Display, program delay 24h, duration and remaining time
- Foam reduction automatic system
- Self balanced load
- Children safety lock




BUILT-IN REFRIGERATORS

CI-54177 ST

Cod.: 07800078 EAN: 8422248350945



- 1,77m built in combi fridge
- Energy efficiency E
- Refrigerator: 1 vegetable drawer, 3 balconies in door and 3 glass shelves
- Freezer: 3 large capacity drawers
- Super freeze function
- Net capacity (l): 249 (179+70)
- Electric consumption: 216 kW/year
- LED lighting
- Sliding door system
- Reversible doors




CI-54177 NF

Cod.: 07800079 EAN: 8422248350952



- Combined Total no Frost 1,77 m
- Energy efficiency E
- No Frost in Freezer & Fridge
- Refrigerator: 1 vegetable drawers, 3 balconies in door and 4 glass shelves
- Freezer: 3 large capacity drawers
- Metallic interior finishes
- Net capacity 244 (177+67)
- Electric consumption: 223 Kw/año
- Led Lighting
- Sliding door system
- Reversible doors




BUILT-IN WINE COOLERS

VI 15107 X

Cod.: 07751006 EAN: 8422248101790



- No frost built-in wine cooler
- Capacity 7 bottles
- Temperature between 5/20°C.
- Electronic temperature control
- Inner led light
- Reversible door
- Energy class G
- Sound level 41 dB




VI 30117 X

Cod.: 07751007 EAN: 8422248101806



- No frost built-in wine cooler
- Capacity 17 bottles
- Dual Temperature zone between 5/22°C
5/13° for white without oak-aging period, sweet, rosé and champagne
13/22° for white with oak-aging, red
- Electronic temperature control
- Inner led light
- Reversible door
- Energy class G
- Sound level 41dB




VI 54024 X

Cod.: 07751008 EAN: 8422248101837



- No frost built-in wine cooler
- Capacity 28 bottles
- Temperature between 5/20°C.
- 2 wooden shelves
- Electronic temperature control
- Inner led light
- Reversible door
- Energy class G
- Sound level 40 dB




VI 59082 X

Cod.: 07702004 EAN: 8422248098915



- No frost built-in wine cooler
- Capacity 46 bottles
- Dual Temperature zone between 5/22°C
5/13° for white without oak-aging period, sweet, rosé and champagne
13/22° for white with oak-aging, red
- 5 wooden shelves
- Electronic temperature control
- Inner led light
- Reversible door
- Energy class G
- Sound level 41dB




VI 59082 X

Cod.: 07702004 EAN: 8422248098915



- No frost built-in wine cooler
- Capacity 46 bottles
- Dual Temperature zone between 5/22°C
5/13° for white without oak-aging period, sweet, rosé and champagne
13/22° for white with oak-aging, red
- 5 wooden shelves
- Electronic temperature control
- Inner led light
- Reversible door
- Energy class G
- Sound level 41dB




UNDERMOUNT SINKS

CB 50-40 R10

Cod.: 02625006 EAN: 8422248108652



- **Square bowl**
- Installation in 60-cm unit
- **Bowl depth 20cm**
- Stainless steel AISI 304 18/10
- Basket valve 3 1/2"
- Thickness 1,2mm




CB 45-40 R10

Cod.: 02621006 EAN: 8422248108645



- **Square bowl**
- Installation in 60-cm unit
- **Bowl depth 20cm**
- Stainless steel AISI 304 18/10
- Basket valve 3 1/2"
- Thickness 1,2mm




CB 40-40 P R10

Cod.: 02624006 EAN: 8422248108669



- **Square bowl**
- Installation in 50-cm unit
- **Bowl depth 25cm**
- Stainless steel AISI 304 18/10
- Basket valve 3 1/2"
- Thickness 1,2mm




CB 40-40 R10

Cod.: 02624016 EAN: 8422248108638



- **Square bowl**
- Installation in 50-cm unit
- **Bowl depth 20cm**
- Stainless steel AISI 304 18/10
- Basket valve 3 1/2"
- Thickness 1,2mm




CB-2

Cod.: 02607101 EAN: 8422248074681



- **Double square bowl**
- Installation in 90-cm unit
- **Bowl depth 20cm**
- Stainless steel AISI 304 18/8
- Basket valve 3 1/2"
- Thickness 0,9mm




CB 50-40

Cod.: 02625300 EAN: 8422248048743



- **Square bowl**
- Installation in 60-cm unit
- **Bowl depth 20cm**
- Stainless steel AISI 304 18/8
- Basket valve 3 1/2"
- Thickness 0,8mm




CB 45-40

Cod.: 02621009 EAN: 8422248043175



- **Square bowl**
- Installation in 60-cm unit
- **Bowl depth 18cm**
- Stainless steel AISI 304 18/8
- Basket valve 3 1/2"
- Thickness 0,8mm




CB 40-40

Cod.: 02624007 EAN: 8422248109000



- **Square bowl**
- Installation in 50-cm unit
- **Bowl depth 18cm**
- Stainless steel AISI 304
- Basket valve 3 1/2"
- Thickness 0,7mm



TOP MOUNT SINKS

CBP 40-40

Cod.: 02624302 EAN: 8422248109017



- **Square bowl**
- Installation in 50-cm unit
- **Bowl depth 20cm**
- Stainless steel AISI 304
- Basket valve 3 1/2"
- Thickness 0,7mm

CBS-1 40-40 D R10

Cod.: 02624008 EAN: 8422248109024



- **1 square bowl with draining board**
- Installation in 45-cm unit
- **Bowl depth 20cm**
- Stainless steel AISI 304
- Basket valve 3 1/2"
- Thickness 1,2mm

CBS-2 40-40 R10

Cod.: 02624009 EAN: 8422248109031







- **Double square bowl**
- Installation in 90-cm unit
- **Bowl depth 20cm**
- Stainless steel AISI 304
- Basket valve 3 1/2"
- Thickness 1,2mm

CBS-1 54-40 R10

Cod.: 02624010 EAN: 8422248109048



- **Square bowl**
- Installation in 60-cm unit
- **Bowl depth 20cm**
- Stainless steel AISI 304
- Basket valve 3 1/2"
- Thickness 1,2mm



CDL-1 REV

Cod.: 02606603 EAN: 8422248108904

NEW



- **1 square bowl with draining board**
- **Reversible**
- Installation in 45-cm unit
- **Bowl depth 18cm**
- Stainless steel AISI 304 18/8
- Basket valve 3 1/2"
- Thickness 0,8mm

CDL-1 EI

Cod.: 02606601 EAN: 8422248108911



- **1 square bowl with draining board**
- Installation in 45-cm unit
- **Bowl depth 18cm**
- Stainless steel AISI 304 18/8
- Basket valve 3 1/2"
- Thickness 0,8mm

CDL-1 ED

Cod.: 02606602 EAN: 8422248108928



- **1 square bowl with draining board**
- Installation in 45-cm unit
- **Bowl depth 18cm**
- Stainless steel AISI 304 18/8
- Basket valve 3 1/2"
- Thickness 0,8mm





CDP-1 REV

Cod.: 02606503 EAN: 8422248108935

NEW



- **1 square bowl with draining board**
- **Reversible**
- Installation in 45-cm unit
- **Bowl depth 18cm**
- Stainless steel AISI 304 18/10
- Basket valve 3 1/2"
- Thickness 0,8mm




CDP-1 EI

Cod.: 02606501 EAN: 8422248108942



- 1 square bowl with draining board
- Installation in 45-cm unit
- **Bowl depth 18cm**
- Stainless steel AISI 304 18/10
- Basket valve 3 1/2"
- Thickness 0,8mm




CDP-1 ED

Cod.: 02606502 EAN: 8422248108959



- 1 square bowl with draining board
- Installation in 45-cm unit
- **Bowl depth 18cm**
- Stainless steel AISI 304 18/10
- Basket valve 3 1/2"
- Thickness 0,8mm




RD-1 REV

Cod.: 02603300 EAN: 8422248074414



- 1 round bowl with draining board
- **Reversible**
- Installation in 45cm unit
- **Bowl depth 15cm**
- Stainless steel AISI 304 18/8
- Basket valve 3 1/2"
- Thickness 0,8mm




CDS-1 REV

Cod.: 02606400 EAN: 8422248074421



- 1 square bowl with draining board
- **Reversible**
- Installation in 45-cm unit
- **Bowl depth 16cm**
- Stainless steel AISI 304 18/10
- Basket valve 3 1/2"
- Thickness 0,5mm




CDS-1 EI

Cod.: 02606401 EAN: 8422248108973



- 1 square bowl with draining board
- Installation in 45-cm unit
- **Bowl depth 16cm**
- Stainless steel AISI 304 18/10
- Basket valve 3 1/2"
- Thickness 0,5mm




CDS-1 ED

Cod.: 02606402 EAN: 8422248108980



- 1 square bowl with draining board
- Installation in 45-cm unit
- **Bowl depth 16cm**
- Stainless steel AISI 304 18/10
- Basket valve 3 1/2"
- Thickness 0,5mm




C-2 AG

Cod.: 02607102 EAN: 8422248109055



- 2 square bowl
- Installation in 80-cm unit
- **Bowl depth 20cm**
- Stainless steel AISI 304 18/8
- Basket valve 3 1/2"
- Thickness 0,7mm




R-2 AG

Cod.: 02604209 EAN: 8422248043151



- 2 round bowl
- Installation in 90-cm unit
- **Bowl depth 18cm**
- Stainless steel AISI 304 18/8
- Basket valve 3 1/2"
- Thickness 0,8mm




CSS60-1

Cod.: 02612300 EAN: 8422248074377



- Square bowl
- Installation in 60-cm unit
- Bowl depth 15cm
- Stainless steel AISI 304 18/8
- Basket valve 3 1/2"
- Thickness 0,7mm




CSS-1

Cod.: 02612400 EAN: 8422248074384



- Square bowl
- Installation in 50-cm unit
- Bowl depth 15cm
- Stainless steel AISI 304 18/8
- Basket valve 3 1/2"
- Thickness 0,7mm




CS-1

Cod.: 02612101 EAN: 8422248055338



- Square bowl
- Installation in 45-cm unit
- Bowl depth 16,5cm
- Stainless steel AISI 304 18/8
- Basket valve 3 1/2"
- Thickness 0,8mm




RS-1

Cod.: 02602100 EAN: 8422248108997



- Round bowl
- Installation in 45-cm unit
- Bowl depth 16cm
- Stainless steel AISI 304 18/8
- Basket valve 3 1/2"
- Thickness 0,7mm




TAPS

CPA

Cod.: 02507400 EAN: 8422248107938



- Brass tap
- Ceramic cartridge
- Cold start
- Removable stem
- Revolving stem 360°
- Anti scale areator with 5 l/min flow limit




CPB

Cod.: 02506400 EAN: 8422248107914



- Brass tap
- Ceramic cartridge
- Cold start
- Removable stem
- Revolving stem 360°
- Anti scale areator with 5 l/min flow limit




XPB

Cod.: 02506300 EAN: 8422248107921



- Stainless Steel tap
- Ceramic cartridge
- Cold start
- Removable stem
- Revolving stem 360°
- Anti scale areator with 5 l/min flow limit




XSE

Cod.: 02500301 EAN: 8422248107907



- Stainless Steel tap
- **Ceramic cartridge**
- **Cold start**
- Removable stem
- Revolving stem 360°
- **Anti scale areator with 5 l/min flow limit**




CSE

Cod.: 02500401 EAN: 8422248107891



- Brass tap
- **Ceramic cartridge**
- **Cold start**
- Removable stem
- Revolving stem 360°
- **Anti scale areator with 5 l/min flow limit**




BSE

Cod.: 02500601 EAN: 8422248355308



- Brass tap
- **Ceramic cartridge**
- **Cold start**
- Removable stem
- Revolving stem 360°
- **Anti scale areator with 5 l/min flow limit**
- Black finish




CSA

Cod.: 02500400 EAN: 8422248107884



- Brass tap
- **Ceramic cartridge**
- **Cold start**
- Revolving stem 360°
- **Anti scale areator with 5 l/min flow limit**
- Chrome finish




CMA

Cod.: 02503400 EAN: 8422248107877



- Brass tap
- **Ceramic cartridge**
- **Cold start**
- Revolving stem 360°
- **Anti scale areator with 5 l/min flow limit**
- Chrome finish




CBA

Cod.: 02502400 EAN: 8422248107860



- Brass tap
- **Ceramic cartridge**
- Revolving stem 360°
- **Anti scale areator with 5 l/min flow limit**
- Chrome finish




CBB

Cod.: 02501400 EAN: 8422248107778



- Brass tap
- **Ceramic cartridge**
- Revolving stem 360°
- **Anti scale areator with 5 l/min flow limit**
- Chrome finish



E GLASS SERIES

E-100 GTH

Cod.: 00900200 EAN: 8422248049634



- Perimeter extraction system
- Timer
- Humidity detector
- Temperature and humidity display
- Minimum sound level of 17dB
- Maximum Airflow 115 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 100

E-120 GTH

Cod.: 00901200 EAN: 8422248056823



- Perimeter extraction system
- Timer
- Humidity detector
- Temperature and humidity display
- Minimum sound level of 19dB
- Maximum Airflow 210 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 120

E-150 GTH


Cod.: 00902200 EAN: 8422248056854







- Perimeter extraction system
- Timer
- Humidity detector
- Temperature and humidity display
- Minimum sound level of 23dB
- Maximum Airflow 350 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 150

E-100 GSTH

Cod.: 00900600 EAN: 8422248056076



- Perimeter extraction system
- Timer
- Humidity detector
- Temperature and humidity display
- Minimum sound level of 17dB
- Maximum Airflow 115 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 100



E GLASS SERIES

E-100 GT

Cod.: 00900200 EAN: 8422248049634



- Perimeter extraction system
- Timer
- Humidity detector
- Temperature and humidity display
- Minimum sound level of 17dB
- Maximum Airflow 115 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 100

E-100 GT

Cod.: 00900100 EAN: 8422248049627



- Perimeter extraction system
- Timer
- Minimum sound level of 31dB
- Maximum Airflow 115 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 100

E-120 GT

Cod.: 00901100 EAN: 8422248056816







- Perimeter extraction system
- Timer
- Minimum sound level of 33dB
- Maximum Airflow 210 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 120

E-150 GT

Cod.: 00902100 EAN: 8422248056847



- Perimeter extraction system
- Timer
- Minimum sound level of 35dB
- Maximum Airflow 350 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 150



E GLASS SERIES

E-100 GSTH

Cod.: 00900600 EAN: 8422248056076



- Perimeter extraction system
- Timer
- Humidity detector
- Temperature and humidity display
- Minimum sound level of 17dB
- Maximum Airflow 115 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 100

E-100 GT BK

Cod.: 00900502 EAN: 8422248071888



- Perimeter extraction system
- Timer
- Minimum sound level of 31dB
- Maximum Airflow 115 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 100

E-100 GLT

Cod.: 00900001 EAN: 8422248056786







- Perimeter extraction system
- Timer
- Ambient light
- Minimum sound level of 31dB
- Maximum Airflow 115 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 100

E-100 G

Cod.: 00900000 EAN: 8422248049610



- Perimeter extraction system
- Minimum sound level of 31dB
- Maximum Airflow 115 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 100



E GLASS SERIES

E-100 GS

Cod.: 00900400 EAN: 8422248056052



- Perimeter extraction system
- Minimum sound level of 31dB
- Maximum Airflow 115 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 100

E-100 G BK

Cod.: 00900402 EAN: 8422248071871



- Perimeter extraction system
- Minimum sound level of 31dB
- Maximum Airflow 115 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 100

E-120 G

Cod.: 00901000 EAN: 8422248056809







- Perimeter extraction system
- Minimum sound level of 33dB
- Maximum Airflow 210 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 120

E-150 G

Cod.: 00902000 EAN: 8422248056830



- Perimeter extraction system
- Minimum sound level of 35dB
- Maximum Airflow 350 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 150



U-COMFORT SERIES


UC-8

Cod.: 01500000 EAN: 8422248356060



NEW

- Different Frontal cover designs
- Motor class B and thermal cut out, ambient temperature max. 40°C
- Minimum sound level of 26 dB
- IPX2 Class
- Basic Back draught Shutter
- Maximum Airflow 70 m³/h
- Maximum power 8 W
- 220-240V 50/60Hz, class B
- Outlet diameter 80




UC-10 HYGRO

Cod.: 01200200 EAN: 8422248079860



- Different Frontal cover designs
- Activated by presence
- Timer
- Humidity detector
- Temperature and humidity display
- Minimum sound level of 26 dB
- Maximum Airflow 110 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 100




UC-10 HYGRO SILVER

Cod.: 01201200 EAN: 8422248082594



- Different Frontal cover designs
- Activated by presence
- Timer
- Humidity detector
- Temperature and humidity display
- Minimum sound level of 26 dB
- Maximum Airflow 110 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 100




UC-10 HYGRO BLACK

Cod.: 01202200 EAN: 8422248082624



- Different Frontal cover designs
- Activated by presence
- Timer
- Humidity detector
- Temperature and humidity display
- Minimum sound level of 26 dB
- Maximum Airflow 110 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 100




U-COMFORT SERIES

UC-10 TIMER

Cod.: 01200100 EAN: 8422248079853



- Different Frontal cover designs
- Timer
- Minimum sound level of 26 dB
- Maximum Airflow 110 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 100




UC-10 TIMER SILVER


Cod.: 01201000 EAN: 8422248082587



- Different Frontal cover designs
- Minimum sound level of 26 dB
- Maximum Airflow 110 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 100



- Different Frontal cover designs
- Timer
- Minimum sound level of 26 dB
- Maximum Airflow 110 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 100




UC-10 STD

Cod.: 01200000 EAN: 8422248079846



- Different Frontal cover designs
- Minimum sound level of 26 dB
- Maximum Airflow 110 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 100



U-COMFORT SERIES

UC-10 STD SILVER

Cod.: 01255000 EAN: 8422248082587



- Different Frontal cover designs
- Motor class B and thermal cut out, ambient temperature max. 40°C
- **Minimum sound level of 26 dB**
- Basic Back draught Shutter
- Maximum Airflow 110 m³/h
- Maximum power 8 W
- 220-240V 50/60Hz, class B
- Outlet diameter 100

UC-10 STD BLACK

Cod.: 01256000 EAN: 08422248082600



- Different Frontal cover designs
- Motor class B and thermal cut out, ambient temperature max. 40°C
- **Minimum sound level of 26 dB**
- Basic Back draught Shutter
- Maximum Airflow 110 m³/h
- Maximum power 8 W
- 220-240V 50/60Hz, class B
- Outlet diameter 100

UC-12 HYGRO

Cod.: 01300200 EAN: 8422248345149







- Different Frontal cover designs
- Activated by presence
- **Timer**
- **Ball Bearings Motor**
- **Humidity detector**
- Temperature and humidity display
- Motor class B and thermal cut out, ambient temperature max. 40°C
- **Minimum sound level of 26 dB**
- IP-45 and Double Insulation
- **Adjustable speed**
- Basic Back draught Shutter
- Maximum Airflow 205 m³/h
- Maximum power 12 W
- 220-240V 50/60Hz, class B
- Outlet diameter 120

UC-12 HYGRO SILVER

Cod.: 01301200 EAN: 8436618650009



- Different Frontal cover designs
- Activated by presence
- **Timer**
- **Ball Bearings Motor**
- **Humidity detector**
- Temperature and humidity display
- Motor class B and thermal cut out, ambient temperature max. 40°C
- **Minimum sound level of 26 dB**
- IP-45 and Double Insulation
- **Adjustable speed**
- Basic Back draught Shutter
- Maximum Airflow 205 m³/h
- Maximum power 12 W
- 220-240V 50/60Hz, class B
- Outlet diameter 120



E GLASS SERIES

UC-12 HYGRO BLACK

Cod.: 01302200 EAN: 8436618650016



- Different Frontal cover designs
- Activated by presence
- **Timer**
- **Ball Bearings Motor**
- **Humidity detector**
- Temperature and humidity display
- Motor class B and thermal cut out, ambient temperature max. 40°C
- **Minimum sound level of 26 dB**
- IP-45 and Double Insulation
- **Adjustable speed**
- Basic Back draught Shutter
- Maximum Airflow 205 m³/h
- Maximum power 12 W
- 220-240V 50/60Hz, class B
- Outlet diameter 120

UC-12 TIMER

Cod.: 01300100 EAN: 8422248345132



- Different Frontal cover designs
- **Timer**
- **Ball Bearings Motor**
- Motor class B and thermal cut out, ambient temperature max. 40°C
- **Minimum sound level of 26 dB**
- IP-45 and Double Insulation
- Basic Back draught Shutter
- Maximum Airflow 205 m³/h
- Maximum power 12 W
- 220-240V 50/60Hz, class B
- Outlet diameter 120

UC-12 TIMER SILVER

Cod.: 01301000 EAN: 8436618650023







- Different Frontal cover designs
- **Timer**
- **Ball Bearings Motor**
- Motor class B and thermal cut out, ambient temperature max. 40°C
- **Minimum sound level of 26 dB**
- IP-45 and Double Insulation
- Basic Back draught Shutter
- Maximum Airflow 205 m³/h
- Maximum power 12 W
- 220-240V 50/60Hz, class B
- Outlet diameter 120

UC-12 TIMER BLACK

Cod.: 01302000 EAN: 8436618650030



- Different Frontal cover designs
- **Timer**
- **Ball Bearings Motor**
- Motor class B and thermal cut out, ambient temperature max. 40°C
- **Minimum sound level of 26 dB**
- IP-45 and Double Insulation
- Basic Back draught Shutter
- Maximum Airflow 205 m³/h
- Maximum power 12 W
- 220-240V 50/60Hz, class B
- Outlet diameter 120




U-COMFORT SERIES

UC-12 STD

Cod.: 01300000 EAN: 8422248345125



- Different Frontal cover designs
- Motor class B and thermal cut out, ambient temperature max. 40°C
- Minimum sound level of 26 dB
- IP-45 and Double Insulation
- Basic Back draught Shutter
- Maximum Airflow 205 m³/h
- Maximum power 12 W
- 220-240V 50/60Hz, class B
- Outlet diameter 120




UC-12 STD SILVER

Cod.: 01355000 EAN: 8436618650047



- Different Frontal cover designs
- Motor class B and thermal cut out, ambient temperature max. 40°C
- Minimum sound level of 26 dB
- IP-45 and Double Insulation
- Basic Back draught Shutter
- Maximum Airflow 205 m³/h
- Maximum power 12 W
- 220-240V 50/60Hz, class B
- Outlet diameter 120




UC-12 STD BLACK

Cod.: 01356000 EAN: 8436618650054



- Different Frontal cover designs
- Motor class B and thermal cut out, ambient temperature max. 40°C
- Minimum sound level of 26 dB
- IP-45 and Double Insulation
- Basic Back draught Shutter
- Maximum Airflow 205 m³/h
- Maximum power 12 W
- 220-240V 50/60Hz, class B
- Outlet diameter 120




X-MART MATIC SERIES

X-MART 10 MATIC T

Cod.: 01016000 EAN: 8422248003551



- Perimeter extraction system
- Timer
- Pilot light operation
- Minimum sound level of 38dB
- Maximum Airflow 98 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 100




X-MART 10 MATIC

Cod.: 01015000 EAN: 8422248003544



- Perimeter extraction system
- Pilot light operation
- Minimum sound level of 38dB
- Maximum Airflow 98 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 100




X-MART 12 MATIC

Cod.: 01025000 EAN: 8422248003575



- Perimeter extraction system
- Pilot light operation
- Minimum sound level of 40dB
- Maximum Airflow 190 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 120




X-MART 15 MATIC

Cod.: 01035000 EAN: 8422248003605



- Perimeter extraction system
- Pilot light operation
- Minimum sound level of 42 dB
- Maximum Airflow 320 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 150




X-MART MATIC SERIES

X-MART 10 MATIC INOX

Cod.: 01045000 EAN: 8422248003728



- Perimeter extraction system
- Pilot light operation
- Minimum sound level of 38 dB
- Maximum Airflow 98 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 100




B-MATIC SERIES

B-10 MATIC-TIMER

Cod.: 00916000 EAN: 8422248110303



- With automatic shutter
- Timer
- Minimum sound level of 41 dB
- Maximum Airflow 98 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 100




B-10 MATIC

Cod.: 00915000 EAN: 8422248110204



- With automatic shutter
- Minimum sound level of 41 dB
- Maximum Airflow 98 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 100




B-15 MATIC

Cod.: 00935000 EAN: 8422248111102



- With automatic shutter
- Minimum sound level of 43dB
- Maximum Airflow 320 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 150




X-MART SERIES

X-MART 10 INOX H

Cod.: 01044000 EAN: 8422248003650



- Perimeter extraction system
- Humidity detector
- Pilot light operation
- Minimum sound level of 38dB
- Maximum Airflow 98 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 100




X-MART 10 TIMER

Cod.: 01011000 EAN: 8422248003414



- Perimeter extraction system
- Timer
- Pilot light operation
- Minimum sound level of 38dB
- Maximum Airflow 98 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 100




X-MART 10 STD

Cod.: 01010000 EAN: 8422248003384



- Perimeter extraction system
- Pilot light operation
- Minimum sound level of 38dB
- Maximum Airflow 98 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 100




X-MART 12 STD

Cod.: 01020000 EAN: 8422248003391



- Perimeter extraction system
- Pilot light operation
- Minimum sound level of 40 dB
- Maximum Airflow 190 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 120




X-MART SERIES

X-MART 15 STD

Cod.: 01030000 EAN: 8422248003407



- Perimeter extraction system
- Pilot light operation
- Minimum sound level of 42 dB
- Maximum Airflow 320 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 150




X-MART 10 INOX

Cod.: 01040000 EAN: 8422248003636



- Perimeter extraction system
- Pilot light operation
- Minimum sound level of 38 dB
- Maximum Airflow 98 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 100




X-MART 12 INOX

Cod.: 01050000 EAN: 8422248003667



- Perimeter extraction system
- Pilot light operation
- Minimum sound level of 40 dB
- Maximum Airflow 190 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 120




X-MART 15 INOX

Cod.: 01060000 EAN: 8422248003698



- Perimeter extraction system
- Pilot light operation
- Minimum sound level of 42 dB
- Maximum Airflow 320 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 150




SILENTIS SERIES

SILENTIS LN 10 T

Cod.: 01073000 EAN: 8422248070379



- Front cover easy to dismantle
- Timer
- Minimum sound level of 30 dB
- Maximum Airflow 90 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 100




SILENTIS LN 10

Cod.: 01072000 EAN: 8422248070355



- Front cover easy to dismantle
- Minimum sound level of 30 dB
- Maximum Airflow 90 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 100




SILENTIS SERIES

SILENTIS 12 INOX

Cod.: 01080300 EAN: 8422248016995



- Front cover easy to dismantle
- Minimum sound level of 39 dB
- Maximum Airflow 190 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 120




SILENTIS 15

Cod.: 01090000 EAN: 8422248017015



- Front cover easy to dismantle
- Minimum sound level of 41 dB
- Maximum Airflow 320 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 150




B-PLUS SERIES

B-8 PLUS

Cod.: 00990000 EAN: 8422248113168



- Very slim to be installed in ceiling or wall
- Minimum sound level of 39 dB
- Maximum Airflow 170 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 90




B-10 PLUS

Cod.: 00981001 EAN: 8422248047906



- Very slim to be installed in ceiling or wall
- Minimum sound level of 41 dB
- Maximum Airflow 98 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 100




B-15 PLUS

Cod.: 00983000 EAN: 8422248114226



- Very slim to be installed in ceiling or wall
- Minimum sound level of 43 dB
- Maximum Airflow 320 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 150




B SERIES

B-10 TIMER

Cod.: 00911000 EAN: 8422248110105



- Short tube for wall or ceiling
- Timer
- Minimum sound level of 41 dB
- Maximum Airflow 98 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 100




B-10

Cod.: 00910000 EAN: 8422248110006



- Short tube for wall or ceiling
- Minimum sound level of 41 dB
- Maximum Airflow 98 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 100




B-12

Cod.: 00920000 EAN: 8422248110501



- Short tube for wall or ceiling
- Minimum sound level of 43 dB
- Maximum Airflow 190 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 120




B-15

Cod.: 00930000 EAN: 8422248110907



- Short tube for wall or ceiling
- Minimum sound level of 43 dB
- Maximum Airflow 320 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 150



DUCT IN LINE SERIES

B-12 MATIC

Cod.: 00925000 EAN: 8422248110709



- With **automatic shutter**
- Minimum sound level of 43 dB
- Maximum Airflow 190 m³/h
- Input power 20 W
- 220-240V 50/60Hz, class B
- Outlet diameter 120

B-12 MATIC TIMER

Cod.: 00926000 EAN: 8422248110808



- With **automatic shutter**
- **Timer**
- Minimum sound level of 43 dB
- Maximum Airflow 190 m³/h
- Input power 20 W
- 220-240V 50/60Hz, class B
- Outlet diameter 120

DUCT IN LINE 100/130

Cod.: 00770000 EAN: 8422248920735







- In-line mixed flow fans
- Asynchronous motor
- External terminal box
- Minimum sound level of 24 dB
- Maximum Airflow 130 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 100

DUCT IN-LINE 100/270

Cod.: 00702000 EAN: 8422248021203



- In-line mixed flow fans
- Asynchronous motor
- External terminal box
- Minimum sound level of 24 dB
- Maximum Airflow 270 m³/h
- 230V 50Hz, class B
- Outlet diameter 100



DUCT IN LINE SERIES

DUCT IN-LINE 125/320

Cod.: 00703000 EAN: 8422248021227



- In-line mixed flow fans
- Asynchronous motor
- External terminal box
- Minimum sound level of 26 dB
- Maximum Airflow 365 m³/h
- 230V 50Hz, class B
- Outlet diameter 125

DUCT IN-LINE 150/560

Cod.: 00704000 EAN: 8422248021241



- In-line mixed flow fans
- Asynchronous motor
- External terminal box
- Minimum sound level of 27 dB
- Maximum Airflow 115 m³/h
- 230V 50Hz, class B
- Outlet diameter 150

DUCT IN-LINE 160/560

Cod.: 00705000 EAN: 8422248021265







- In-line mixed flow fans
- Asynchronous motor
- External terminal box
- Minimum sound level of 27 dB
- Maximum Airflow 595 m³/h
- 230V 50Hz, class B
- Outlet diameter 160

DUCT IN-LINE 200/910

Cod.: 00706000 EAN: 8422248021289



- In-line mixed flow fans
- Asynchronous motor
- External terminal box
- Minimum sound level of 32 dB
- Maximum Airflow 910 m³/h
- 230V 50Hz, class B
- Outlet diameter 200



MT SERIES

MT-100

Cod.: 00710000 EAN: 8422248920186



- Duct fans for installation in rigid and flexible tubes
- Minimum sound level of 41 dB
- Maximum Airflow 98 m³/h
- 220-240V 50/60Hz, class B
- Outlet diameter 100

MT-125

Cod.: 00720000 EAN: 8422248920520






- Duct fans for installation in rigid and flexible tubes
- Minimum sound level of 43 dB
- Maximum Airflow 190 m³/h
- 230V 50Hz, class B
- Outlet diameter 125

MT-150

Cod.: 00730000 EAN: 8422248920797



- Duct fans for installation in rigid and flexible tubes
- Minimum sound level of 45 dB
- Maximum Airflow 320 m³/h
- 230V 50Hz, class B
- Outlet diameter 150



WALL FANS

LHV SERIES

LHV 160

Cod.: 00660000 EAN: 8422248009324



- Helicoidal fans to be installed in walls or windows
- Minimum sound level of 40 dB
- Maximum Airflow 450 m³/h
- 230V 50Hz, class B
- Outlet diameter 160

LHV 190

Cod.: 00661000 EAN: 8422248009331



- Helicoidal fans to be installed in walls or windows
- Minimum sound level of 42 dB
- Maximum Airflow 700 m³/h
- 230V 50Hz, class B
- Outlet diameter 190

LHV225

Cod.: 00662000 EAN: 8422248009348







- Helicoidal fans to be installed in walls or windows
- Minimum sound level of 44 dB
- Maximum Airflow 900 m³/h
- 230V 50Hz, class B
- Outlet diameter 225

LHV 300

Cod.: 00663000 EAN: 8422248009355



- Helicoidal fans to be installed in walls or windows
- Minimum sound level of 47 dB
- Maximum Airflow 1450 m³/h
- 230V 50Hz, class B
- Outlet diameter 300




CTRS-100 REV SLIM

Cod.: 03114001 EAN: 8422248102520



- Square slim exterior shape electric water heater 93 litres
- Reversible horizontal and vertical installation
- Digital display control
- Electronically adjustable temperature with display (accuracy to 1°C)
- Magnesium anode
- Safety valve with draining appliance
- Max. power: 2.000 W




CTRS-80 REV SLIM

Cod.: 03112001 EAN: 8422248081474



- Square slim exterior shape electric water heater 74 litres
- Reversible horizontal and vertical installation
- Digital display control
- Electronically adjustable temperature with display (accuracy to 1°C)
- Magnesium anode
- Safety valve with draining appliance
- Max. power: 2.000 W




CTRS-50 REV SLIM

Cod.: 03111001 EAN: 8422248081467



- Square slim exterior shape electric water heater 46 litres
- Reversible horizontal and vertical installation
- Digital display control
- Electronically adjustable temperature with display (accuracy to 1°C)
- Magnesium anode
- Safety valve with draining appliance
- Max. power: 2.000 W




CTRH-80-REV

Cod.: 03112004 EAN: 8422248081580



- Round exterior shape electric water heater 73 litres
- Reversible horizontal and vertical installation
- Mechanic display control
- ECO intelligent mode
- Magnesium anode
- Safety valve with draining appliance
- Total power: 1.500 W




CTRH-50-REV

Cod.: 03111004 EAN: 8422248081573



- Round exterior shape electric water heater 46 litres
- Reversible horizontal and vertical installation
- Mechanic display control
- ECO intelligent mode
- Magnesium anode
- Safety valve with draining appliance
- Total power: 1.500 W




CTR-100-M

Cod.: 03113001 EAN: 8422248081559



- Round exterior shape electric water heater 100 litres
- Vertical installation
- Mechanic display control
- ECO intelligent mode
- Magnesium anode
- Safety valve with draining appliance
- Total power: 1.500 W




CTR-80-M

Cod.: 03112003 EAN: 8422248081542



- Round exterior shape electric water heater 80 litres
- Vertical installation
- Mechanic display control
- ECO intelligent mode
- Magnesium anode
- Safety valve with draining appliance
- Total power: 1.500 W



CTR-50-M

Cod.: 0311003 EAN: 8422248081535



- Round exterior shape electric water heater. 50 litres
- Vertical installation
- Mechanic display control
- ECO intelligent mode
- Magnesium anode
- Safety valve with draining appliance
- Total power: 1.500 W

CTR-30-M

Cod.: 03110001 EAN: 8422248081528



- Round exterior shape electric water heater. 30 litres
- Vertical installation
- Mechanic display control
- ECO intelligent mode
- Magnesium anode
- Safety valve with draining appliance
- Total power: 1.500 W

CTRC-30-M

Cod.: 03110003 EAN: 8422248096621







- 30 liter electric water heater over / under sink
- Vertical installation
- Mechanic display control
- Magnesium anode
- Safety valve with draining appliance
- Total power: 1.500 W

CTRC-15-M

Cod.: 03109000 EAN: 8422248096638



- 15 liter electric water heater over / under sink
- Vertical installation
- Mechanic display control
- Magnesium anode
- Safety valve with draining appliance
- Total power: 1.500 W







TECHNICAL INFORMATION & ACCESSORIES

Code	02159420	02189020	08000405	08000406	08000403	02119207	02119203	02119101
EAN	8422248343077	8422248344692	8422248109406	8422248198554	8422248102568	8422248069342	8422248062084	8422248074230
Model	RENOVA PURE AIR VN90 BK	RENOVA PURE AIR MNV90 GWH	AS 750	AS 600	IAS 770	ISLA MAGRABA	ISLA MOON	ISLA FARO X
Type	Vertical	Box	Surface	Surface	Surface	Island	Island	Island
Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564								
AEC (Annual Energy consumption) (kWh/annum)	-	-	29	29	29	97,1	97,1	56,3
EEL class (Energy Efficiency Class)	-	-	A	A+	A	C	C	A
FDE (Fluid Dynamic Efficiency)	-	-	27,2	32	27,2	15,7	15,9	30,6
FDE class (Fluid Dynamic Efficiency Class)	-	-	B	A	B	D	D	A
LE (Lighting Efficiency) (lux/W)	-	-	-	-	0	14,3	14,3	36
LE class (Lighting Efficiency Class)	-	-	-	-	0	D	D	A
GFE (Grease Filtering Efficiency)	-	-	45,8	45,8	45,8	91,2	91,2	91,2
GFE Class (Grease Filtering Efficiency class)	-	-	F	F	F	B	B	B
Air flow at minimum speed (m ³ /h)	-	-	200	246,4	198,6	300	300	340
Air flow at maximum speed (m ³ /h)	-	-	440,1	446,3	440,1	645	645	600
Air flow at intensive speed (TURBO) (m ³ /h)	-	-	580	531,5	545,2	-	-	800
Sound Power Level at minimum speed (dB)	-	-	45	45	45	48	48	50
Sound Power Level at maximum speed (dB)	-	-	64	64	64	63	63	65
Sound Power Level at intensive speed (TURBO) (dB)	-	-	67	67	67	-	-	67
Po (Power Consumption in off mode) (W)	-	-	0,46	0,4	0,46	0,26	0,45	0,26
Ps (Power Consumption in standby) (W)	-	-	-	-	0	0	0	0
Integration directive EU 66/2014								
f (Time Increase Factor)	-	-	1	1	1	1,4	1,4	0,9
EEL (Energy Efficiency Index)	-	-	49,2	49,2	49,2	84,1	84,1	53,7
QBEP (Flow Rate at Best Efficiency Point) (m ³ /h)	-	-	264,2	264,2	264,2	385,1	386,4	416,9
PBEP (Static Pressure Difference at Best Efficiency Point) (Pa)	-	-	294	294	294	253	254	411
WBEP (Electric Power Input at Best Efficiency Point) (W)	-	-	79,4	79,4	79,4	172,1	171,5	155,7
WL (Nominal Power Consumption of Lighting system) (W)	-	-	0	0	0	10,5	10,5	7
EMIDDLE (Average Illumination of Lighting system on Cooking surface) (lux)	-	-	0	0	0	150	150	252
External Dimensions								
Width (mm)	900	900	770	590	770	650	400	400
Depth (mm)	314	310-350	520	520	520	650	400	400
Total max height(mm)	1170	670	250	275	285	1700	1700	1090
Total min height(mm)	855	520	-	-	-	720	860	700
Outlet Diameter (mm)	-	-	150	150	150	-	-	150/125
Characteristics								
Motor	BT4DC	BT4DC	BLDC	BLDC	BLDC	BT2	BT2	BT3
Extraction Levels	5 + 1	5 + 1	5+1	5+1	5+1	3	3	2 + 1
Motor Maximum Power Consumption	140	140	135	135	135	200	200	280
Maximum Pressure	357	357	-	-	-	400	400	450
Intensive Speed (TURBO) Pressure	365	365	-	-	-	-	-	470
Control Type	TCd6i	TCd6i	TC	TC	TC	VL3	TC3V	VL3i
Automatic shut-down timer	√	√	√	√	√	√	√	√
Electronic Filter Saturation Indicator	√	√	√	√	√	-	√	-
Filter Type	Metallic/Plasma	Metallic/Plasma	Metallic	Metallic	Metallic	Metallic	Dual	Metallic
Anti-grease Filter Number	2+1	3	2	2	2	1	1	1
Inner Shield	-	-	√	√	√	-	-	√
Lighting								
Light Type	SS Led	SSLED	-	-	-	EcoLed	EcoLed	EcoLed
Adjustable Intensity Lighting	√	√	-	-	-	-	√	-
N° of Lamps	1	1	-	-	-	3	3	2
Installation								
Minimum height distance to a electric worktop hob (mm)	400	550	-	-	-	650	650	650
Minimum height distance to a gas worktop hob (mm)	650	650	-	-	-	650	650	650
Installation with Outlet tube to the exterior / Recirculating	BOTH	BOTH	BOTH	BOTH	BOTH	RECIRCULATION	RECIRCULATION	BOTH
Easy Installation System	√	√	√	√	√	√	√	√
Electric Connection								
Total Rush Power (W)	158	158	7335	7335	7200	210,5	210,5	287
Rated Voltage (V)	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240
Network Frequency (Hz)	50-60	50-60	50-60	50-60	50-60	50	50	50
Electrical Insulation Class	CLASS I	CLASS I	CLASE I	CLASE I	CLASS II	CLASS II	CLASS II	CLASS II
Plug	-	-	-	-	-	-	-	EU - 2 pins
Accessories								
Upper Decorative tube Extension	-	-	-	-	-	-	-	-
White Decorative Tube	-	-	-	-	-	-	-	-
Black Decorative Tube	-	-	-	-	-	-	-	-
Island Tube Enhancer	-	-	-	-	-	-	-	-
Check Valve	-	-	-	-	-	-	-	02832004
MAX PRO Metal Filter	-	-	-	-	-	-	-	-
Metal Filter	02800209+02800927	02811006	02800935*	02800935*	02800935*	-	-	02811004*
DUAL Filter (metal + active charcoal)	-	-	02800937	02800937	02800937	02800922*	02811003*	02811003
Active Charcoal Filter	-	-	02800939	02800939	02800939	-	-	-
Noiseless Flexible Duct	-	-	02893002	02893002	02893002	-	-	02893002

02111308	02111309	02111002	02111001	02111305	02097202	02197313	02025205	02119311	02169303	02166303	02195309
8422248110891	8422248112642	8422248097437	8422248077750	8422248077798	8422248061681	8422248062121	8422248077736	8422248110100	8422248110297	8422248077774	8422248077774
ISLA BENNU SLIM 900 X	ISLA BENNU SLIM 1200 X	ISLA SIRIN GLASS 1000 GWH	ISLA SIRIN 1000 WH	Isla Fenix 1000 X /A	ISLA LEGEND 900 XGBK	ISLA SYGMA 900 X /E	ISLA GAMMA 900 X /D	Isla Vega X /C	GALA 900 L	GALA 900 R	ANGOLO BOX 1000 X /C
Island	Island	Island	Island	Island	Island	Island	Island	Island	Corner wall chimney	Corner wall chimney	Corner
24	24	58,9	58,9	58,9	26	56,3	55,7	53,6	53,6	53,6	56,3
A+	A+	A	A	A	A+	A	A	A	A	A	A
35,2	35,2	31,5	31,5	31,5	33,1	30,6	30,2	30,6	30,6	30,6	30,6
A	A	A	A	A	A	A	A	A	A	A	A
27,7	27,7	36,6	36,6	36,6	36	36	36,6	41,2	41,2	41,2	36
B	B	A	A	A	A	A	A	A	A	A	A
58,6	58,6	91,2	91,2	91,2	91,2	91,2	91,2	91,2	91,2	91,2	91,2
E	E	B	B	B	B	B	B	B	B	B	B
266	266	340	340	340	200	340	340	340	340	340	340
535	535	600	600	600	645	600	600	600	600	600	600
570	570	850	850	850	820	850	800	850	802	802	800
50	50	50	50	50	40	50	50	50	50	50	50
65	65	65	65	65	64	65	65	65	65	65	65
67	67	67	67	67	67	67	67	67	67	67	67
0,32	0,32	0,3	0,3	0,3	0,41	0,26	0,26	0,32	0,32	0,32	0,26
0	0	0	0	0	0	0	0	0	-	-	0
0,7	0,7	0,9	0,9	0,9	0,8	0,9	0,9	0,9	0,9	0,9	0,9
37,4	37,4	54,6	54,6	54,6	44,8	53,7	53	54,6	52,1	52,1	53,7
289	289	350,4	350,4	350,4	344,8	416,9	429,4	421,1	416,9	416,9	416,9
375	375	380	380	380	244	411	405	416	411	411	411
85,3	85,3	132,8	132,8	132,8	70,8	155,7	159,8	154,1	155,7	155,7	155,7
3	3	14	14	14	7	7	14	14	3,5	3,5	7
83	83	513	513	513	252	252	513	513	144,2	144,2	252
860	1160	1000	1000	1000	900	900	900	600	900	900	1000
665	665	600	600	600	610	600	600	480	500	500	1000
170	170	500	500	500	1040	1040	1190	1185	985	985	1160
170	170	285	285	285	790	790	872	785	635	635	825
220x90 / 150	220x90 / 150	150	150	150	150/125	150/125	150/125	150/125	150/125	150/125	150/125
190	190	BT3	BT3	BT3	BTDCA	BT3	BT3	BT3	BT3	BT3	BT3
5+1	5+1	3+1	3+1	3+1	4 + 1	2 + 1	2 + 1	2 + 1	3+1	3+1	2 + 1
90	90	280	280	280	130	280	280	280	280	280	280
636,5	636,5	450	450	450	455	450	450	450	450	450	450
692,1	692,1	470	470	470	470	470	470	470	470	470	470
TC6i	TC6i	TC4i	TC4i	TC4i	TC5i	VL3i	VL3i	VL3i	NL4i	NL4i	VL3i
√	√	√	√	√	√	√	√	√	√	√	√
√	√	√	√	√	√	-	-	-	√	√	-
Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Decorative s. steel	Decorative s. steel	Metallic
2	2	3	3	3	4	4	1	2	3	3	3
-	-	-	-	-	-	-	-	-	-	-	-
SSLED	SSLED	EcoLed	EcoLed	EcoLED	EcoLed	EcoLed	EcoLed	EcoLed	Eco Led Strip	Eco Led Strip	EcoLed
√	√	√	√	√	√	-	-	-	√	√	-
1	1	4	4	4	2	2	4	4	1	1	2
550	550	550	550	550	650	650	650	650	650	650	650
660	660	660	660	660	650	650	650	650	650	650	650
BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	√ / √	√ / √	BOTH
√	√	√	√	√	√	√	√	√	√	√	√
93	93	294	294	294	137	287	294	294	285	285	287
220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240
50	50	50	50	50	50	50	50	50	50	50	50
CLASE I	CLASE I	CLASS II	CLASS II	CLASS II	CLASS II	CLASS II	CLASS II	CLASS II	CLASS II	CLASS II	CLASS II
-	-	EU - 2 pins	EU - 2 pins	EU - 2 pins	EU - 2 pins	EU - 2 pins	EU - 2 pins	EU pla - 2 Pins	EU	EU	EU - 2 pins
-	-	-	-	-	-	-	-	-	-	-	02853300
-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	02864300	02864300	-	02863300	-	-	-
-	-	02832006	02832006	02832006	02832004	02832004	02832004	02832004	02832004	02832004	02832004
-	-	02800917	02800917	02800917	02800917	02800917	-	02800917	02800917	02800917	02800917
02800930	02800930	02800200*	02800200*	02800200*	02800200*	02800200*	02812000*	02800200*	02800206	02800206	02800200*
02800922	02800922	02800918	02800918	02800918	02800918	02800918	-	02800918	02800918	02800918	02800918
-	-	02859398	02859398	02859398	02859398	02859398	02859398	02859398	02859398	02859398	-
-	-	02893002	02893002	02893002	02893002	02893002	02893002	02893002	02893002	02893002	02893002

Code	02195310	02184401	02129404	02127404	02129004	02127004	02184407
EAN	8422248077781	8422248082198	8422248190541	8422248190527	8422248190534	8422248190510	8422248106146
Model	ANGOLO X /D	GOYA PRO 90 BK	GOYA 90 BK CATA&ROCA	GOYA 70 BK CATA&ROCA	GOYA 90 WH CATA&ROCA	GOYA 70 WH CATA&ROCA	GRECO 90 BK CATA&ROCA
Type	Corner	Vertical	Vertical	Vertical	Vertical	Vertical	Vertical
Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564							
AEC (Annual Energy consumption) (kWh/annum)	56,3	14,5	14,5	14,5	14,5	14,5	56,3
EEL class (Energy Efficiency Class)	A	A+++	A+++	A+++	A+++	A+++	A
FDE (Fluid Dynamic Efficiency)	30,6	39,7	39,7	39,7	39,7	39,7	30,6
FDE class (Fluid Dynamic Efficiency Class)	A	A	A	A	A	A	A
LE (Lighting Efficiency) (lux/W)	36	26,3	26,3	26,3	26,3	26,3	28,7
LE class (Lighting Efficiency Class)	A	B	B	B	B	B	A
GFE (Grease Filtering Efficiency)	91,2	75,5	75,5	75,5	75,5	75,5	91,2
GFE Class (Grease Filtering Efficiency class)	B	C	C	C	C	C	B
Air flow at minimum speed (m ³ /h)	340	200	200	200	200	200	340
Air flow at maximum speed (m ³ /h)	600	605	605	605	605	605	600
Air flow at intensive speed (TURBO) (m ³ /h)	850	825	825	825	825	825	850
Sound Power Level at minimum speed (dB)	50	40	40	40	40	40	50
Sound Power Level at maximum speed (dB)	65	64	64	64	64	64	65
Sound Power Level at intensive speed (TURBO) (dB)	67	69	69	69	69	69	67
Po (Power Consumption in off mode) (W)	0,26	0,4	0,4	0,4	0,4	0,4	0,43
Ps (Power Consumption in standby) (W)	0	0,4	0	0	0	0	0
Integration directive EU 66/2014							
f (Time Increase Factor)	0,9	0,6	0,6	0,6	0,6	0,6	0,9
EEL (Energy Efficiency Index)	53,7	29,3	29,3	29,3	29,3	29,3	53,7
QBEP (Flow Rate at Best Efficiency Point) (m ³ /h)	416,9	259,7	259,7	259,7	259,7	259,7	416,9
PBEP (Static Pressure Difference at Best Efficiency Point) (Pa)	411	326,2	326,2	326,2	326,2	326,2	411
WBEP (Electric Power Input at Best Efficiency Point) (W)	155,7	59,2	59,2	59,2	59,2	59,2	155,7
WL (Nominal Power Consumption of Lighting system) (W)	7	3	3	3	3	3	7
EMIDDLE (Average Illumination of Lighting system on Cooking surface) (lux)	252	79	79	79	79	79	201
External Dimensions							
Width (mm)	985	900	900	700	900	700	900
Depth (mm)	985	296	300	300	300	300	300
Total max height(mm)	955	1160	1200	1200	1200	1200	1070
Total min height(mm)	765	845	845	845	845	845	755
Outlet Diameter (mm)	150/125	150	150/125	150/125	150/125	150/125	150/125
Characteristics							
Motor	BT3	BT4DC	BT4DC	BT4DC	BT4DC	BT4DC	BT3
Extraction Levels	2 + 1	5 + 1	5+1	5+1	5+1	5+1	3+1
Motor Maximum Power Consumption	280	140	135	135	135	135	280
Maximum Pressure	450	357	357	357	357	357	450
Intensive Speed (TURBO) Pressure	470	365	365	365	365	365	470
Control Type	VL3i	TFT Touch	TCD6i	TCD6i	TCD6i	TCD6i	TC4i
Automatic shut-down timer	√	√	√	√	√	√	√
Electronic Filter Saturation Indicator	-	√	√	√	√	√	√
Filter Type	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic
Anti-grease Filter Number	3	2 + 1	2+1	2+1	2+1	2+1	1+1
Inner Shield	-	-	-	-	-	-	-
Lighting							
Light Type	EcoLed	SS Led	SS Led	SS Led	SS Led	SS Led	EcoLed
Adjustable Intensity Lighting	-	√	√	√	√	√	√
N° of Lamps	2	1	1	1	1	1	2
Installation							
Minimum height distance to a electric worktop hob (mm)	650	530	530	530	530	530	530
Minimum height distance to a gas worktop hob (mm)	650	650	650	650	650	650	650
Installation with Outlet tube to the exterior / Recirculating	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH
Easy Installation System	√	√	√	√	√	√	√
Electric Connection							
Total Rush Power (W)	287	143	138	138	138	138	287
Rated Voltage (V)	220-240	220-240	220-240	220-240	220-240	220-240	220-240
Network Frequency (Hz)	50	50-60	50	50	50	50	50
Electrical Insulation Class	CLASS II	CLASS I	CLASS I	CLASS I	CLASS I	CLASS I	CLASS II
Plug	EU - 2 pins	-	-	-	-	-	EU - 2 pins
Accessories							
Upper Decorative tube Extension	-	02861303	02861303	02861303	2859318	2859318	02861303
White Decorative Tube	-	-	-	-	-	-	-
Black Decorative Tube	-	02861403	02861403	02861403	02861403	02861403	02861403
Island Tube Enhancer	-	-	-	-	-	-	-
Check Valve	02832004	02832008	02832008	02832008	02832008	02832008	02832004
MAX PRO Metal Filter	-	-	-	-	-	-	-
Metal Filter	02800300*	02800905*/02800904*	02800905*/02800904*	02800905+02800904	02800905+02800904	02800905+02800904	02800930+02800904
DUAL Filter (metal + active charcoal)	-	02800918+02800938	02800918+02800938	02800918+02800938	02800918+02800938	02800918+02800938	02800922+02800938
Active Charcoal Filter	02859398	02859318	02859318+02800938	02859318+02800938	02859318+02800938	02859318+02800938	02859398
Noiseless Flexible Duct	02893002	02893002	02893002	02893002	02893002	02893002	02893002

02145407	02133407	02184007	02145007	02133007	02145203	02131407	02139407	02138407	02137407	02136407
8422248106160	8422248106191	8422248106153	8422248106184	8422248106207	8422248106177	8422248356329	8422248356282	8422248356299	8422248356305	8422248356312
GRECO 80 BK CATA&ROCA	GRECO 70 BK CATA&ROCA	GRECO 90 WH CATA&ROCA	GRECO 80 WH CATA&ROCA	GRECO 70 WH CATA&ROCA	GRECO 80 GR CATA&ROCA	THALASSA PRO 1200GBK	THALASSA PRO 900GBK	THALASSA PRO 800GBK	THALASSA PRO 700GBK	THALASSA PRO 600GBK
Vertical	Vertical	Vertical	Vertical	Vertical	Vertical	Vertical	Vertical	Vertical	Vertical	Vertical
56,3	56,3	56,3	56,3	56,3	56,3	16,8	16,8	16,8	16,8	16,8
A	A	A	A	A	A	A+++	A+++	A+++	A+++	A+++
30,6	30,6	30,6	30,6	30,6	30,6	40,3	40,3	40,3	40,3	40,3
A	A	A	A	A	A	A	A	A	A	A
28,7	28,7	28,7	28,7	28,7	28,7	23,7	23,7	23,7	23,7	23,7
A	A	A	A	A	A	B	B	B	B	B
91,2	91,2	91,2	91,2	91,2	91,2	75,5	75,5	75,5	75,5	75,5
B	B	B	B	B	B	C	C	C	C	C
340	340	340	340	340	340	283	283	283	283	283
600	600	600	600	600	600	640,5	640,5	640,5	640,5	640,5
850	850	850	850	850	850	842	842	842	842	842
50	50	50	50	50	50	46	46	46	46	46
65	65	65	65	65	65	64	64	64	64	64
67	67	67	67	67	67	69	69	69	69	69
0,43	0,43	0,43	0,43	0,43	0,43	0,35	0,35	0,35	0,35	0,35
0	0	0	0	0	0	-	-	-	-	-
0,9	0,9	0,9	0,9	0,9	0,9	0,5	0,5	0,5	0,5	0,5
53,7	53,7	53,7	53,7	53,7	53,7	27,5	27,5	27,5	27,5	27,5
416,9	416,9	416,9	416,9	416,9	416,9	369,6	369,6	369,6	369,6	369,6
411	411	411	411	411	411	314	314	314	314	314
155,7	155,7	155,7	155,7	155,7	155,7	80	80	80	80	80
7	7	7	7	7	7	3	3	3	3	3
201	201	201	201	201	201	71	71	71	71	71
800	700	900	800	700	800	1200	900	800	700	600
300	300	300	300	300	300	375	375	375	375	375
1070	1070	1070	1070	1070	1070	1130	1130	1130	1130	1130
755	755	755	755	755	755	815	815	815	815	815
150/125	150/125	150/125	150/125	150/125	150/125	150/125	150/125	150/125	150/125	150/125
BT3	BT3	BT3	BT3	BT3	BT3	BT4DC	BT4DC	BT4DC	BT4DC	BT4DC
3*1	3*1	3*1	3*1	3*1	3*1	5*1	5*1	5*1	5*1	5*1
280	280	280	280	280	280	135	135	135	135	135
450	450	450	450	450	450	357	357	357	357	357
470	470	470	470	470	470	365	365	365	365	365
TC4i	TC4i	TC4i	TC4i	TC4i	TC4i	TCD6i	TCD6i	TCD6i	TCD6i	TCD6i
√	√	√	√	√	√	√	√	√	√	√
√	√	√	√	√	√	√	√	√	√	√
Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic
1*1	1*1	1*1	1*1	1*1	1*1	1*1	1*1	1*1	1*1	1*1
-	-	-	-	-	-	-	-	-	-	-
EcoLed	EcoLed	EcoLed	EcoLed	EcoLed	EcoLed	SS Led	SS Led	SS Led	SS Led	SS Led
√	√	√	√	√	√	√	√	√	√	√
2	2	2	2	2	2	1	1	1	1	1
530	530	530	530	530	530	450	450	450	450	450
650	650	650	650	650	650	650	650	650	650	650
BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH
√	√	√	√	√	√	√	√	√	√	√
287	287	287	287	287	287	138	138	138	138	138
220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240
50	50	50	50	50	50	50-60	50-60	50-60	50-60	50-60
CLASS II	CLASS II	CLASS II	CLASS II	CLASS II	CLASS II	CLASS I	CLASS I	CLASS I	CLASS I	CLASS I
EU - 2 pins	EU - 2 pins	EU - 2 pins	EU - 2 pins	EU - 2 pins	EU - 2 pins	-	-	-	-	-
02861303	02861303	02861303	02861303	02861303	02861303	02861300	02861300	02861300	02861300	02861300
-	-	02861003	02861003	02861003	-	02861001	02861001	02861001	02861001	02861001
02861403	02861403	-	-	-	02861403	02861401	02861401	02861401	02861401	02861401
-	-	-	-	-	-	-	-	-	-	-
02832004	02832004	02832004	02832004	02832004	02832004	02832004	02832004	02832004	02832004	02832004
-	-	-	-	-	-	-	-	-	-	-
02800930-02800904	02800930-02800904	02800930-02800904	02800930-02800904	02800930-02800904	02800930-02800904	02800930 / 02800925	02800930 / 02800925	02800930 / 02800925	02800930 / 02800925	02800930 / 02800925
02800922-02800938	02800922-02800938	02800922-02800938	02800922-02800938	02800922-02800938	02800922-02800938	02800922 / 02800927	02800922 / 02800927	02800922 / 02800927	02800922 / 02800927	02800922 / 02800927
02859398	02859398	02859398	02859398	02859398	02859398	02859318	02859318	02859318	02859318	02859318
02893002	02893002	02893002	02893002	02893002	02893002	02893002	02893002	02893002	02893002	02893002

Code	02139007	02138007	02137007	02136007	02139507	02138507	02139406
EAN	8422248356336	8422248356343	8422248356350	8422248356367	8422248356374	8422248356381	8422248356220
Model	THALASSA PRO 900GWH	THALASSA PRO 800GWH	THALASSA PRO 700GWH	THALASSA PRO 600GWH	THALASSA PRO 900GR	THALASSA PRO 800GR	THALASSA 900GBK
Type	Vertical	Vertical	Vertical	Vertical	Vertical	Vertical	Vertical
Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564							
AEC (Annual Energy consumption) (kWh/annum)	16,8	16,8	16,8	16,8	16,8	16,8	58,6
EEL class (Energy Efficiency Class)	A+++	A+++	A+++	A+++	A+++	A+++	A
FDE (Fluid Dynamic Efficiency)	40,3	40,3	40,3	40,3	40,3	40,3	29,4
FDE class (Fluid Dynamic Efficiency Class)	A	A	A	A	A	A	A
LE (Lighting Efficiency) (lux/W)	23,7	23,7	23,7	23,7	23,7	23,7	23,7
LE class (Lighting Efficiency Class)	B	B	B	B	B	B	B
GFE (Grease Filtering Efficiency)	75,5	75,5	75,5	75,5	75,5	75,5	75,5
GFE Class (Grease Filtering Efficiency class)	C	C	C	C	C	C	C
Air flow at minimum speed (m³/h)	283	283	283	283	283	283	346
Air flow at maximum speed (m³/h)	640,5	640,5	640,5	640,5	640,5	640,5	600
Air flow at intensive speed (TURBO) (m³/h)	842	842	842	842	842	842	811
Sound Power Level at minimum speed (dB)	46	46	46	46	46	46	50
Sound Power Level at maximum speed (dB)	64	64	64	64	64	64	65
Sound Power Level at intensive speed (TURBO) (dB)	69	69	69	69	69	69	67
Po (Power Consumption in off mode) (W)	0,35	0,35	0,35	0,35	0,35	0,35	0,43
Ps (Power Consumption in standby) (W)	-	-	-	-	-	-	-
Integration directive EU 66/2014							
f (Time Increase Factor)	0,5	0,5	0,5	0,5	0,5	0,5	0,9
EEL (Energy Efficiency Index)	27,5	27,5	27,5	27,5	27,5	27,5	52,7
QBEP (Flow Rate at Best Efficiency Point) (m³/h)	369,6	369,6	369,6	369,6	369,6	369,6	457,2
PBEP (Static Pressure Difference at Best Efficiency Point) (Pa)	314	314	314	314	314	314	397
WBEP (Electric Power Input at Best Efficiency Point) (W)	80	80	80	80	80	80	171,6
WL (Nominal Power Consumption of Lighting system) (W)	3	3	3	3	3	3	3
EMIDDLE (Average Illumination of Lighting system on Cooking surface) (lux)	71	71	71	71	71	71	71
External Dimensions							
Width (mm)	900	800	700	600	900	800	900
Depth (mm)	375	375	375	375	375	375	375
Total max height (mm)	1130	1130	1130	1130	1130	1130	1130
Total min height (mm)	815	815	815	815	815	815	815
Outlet Diameter (mm)	150/125	150/125	150/125	150/125	150/125	150/125	150
Characteristics							
Motor	BT4DC	BT4DC	BT4DC	BT4DC	BT4DC	BT4DC	BT3
Extraction Levels	5+1	5+1	5+1	5+1	5+1	5+1	3+1
Motor Maximum Power Consumption	135	135	135	135	135	135	280
Maximum Pressure	357	357	357	357	357	357	450
Intensive Speed (TURBO) Pressure	365	365	365	365	365	365	470
Control Type	TCD6i	TCD6i	TCD6i	TCD6i	TCD6i	TCD6i	SDX6i
Automatic shut-down timer	√	√	√	√	√	√	√
Electronic Filter Saturation Indicator	√	√	√	√	√	√	√
Filter Type	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic
Anti-grease Filter Number	1+1	1+1	1+1	1+1	1+1	1+1	1+1
Inner Shield	-	-	-	-	-	-	-
Lighting							
Light Type	SS Led	SS Led	SS Led	SS Led	SS Led	SS Led	SS Led
Adjustable Intensity Lighting	√	√	√	√	√	√	√
Nº of Lamps	1	1	1	1	1	1	1
Installation							
Minimum height distance to a electric worktop hob (mm)	450	450	450	450	450	450	450
Minimum height distance to a gas worktop hob (mm)	650	650	650	650	650	650	650
Installation with Outlet tube to the exterior / Recirculating	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH
Easy Installation System	√	√	√	√	√	√	√
Electric Connection							
Total Rush Power (W)	138	138	138	138	138	138	283
Rated Voltage (V)	220-240	220-240	220-240	220-240	220-240	220-240	220-240
Network Frequency (Hz)	50-60	50-60	50-60	50-60	50-60	50-60	50
Electrical Insulation Class	CLASS I	CLASS I	CLASS I	CLASS I	CLASS I	CLASS I	CLASE II
Plug	-	-	-	-	-	-	-
Accessories							
Upper Decorative tube Extension	02861300	02861300	02861300	02861300	02861300	02861300	02861300
White Decorative Tube	02861001	02861001	02861001	02861001	02861001	02861001	02861001
Black Decorative Tube	02861401	02861401	02861401	02861401	02861401	02861401	02861401
Island Tube Enhancer	-	-	-	-	-	-	-
Check Valve	02832004	02832004	02832004	02832004	02832004	02832004	02832004
MAX PRO Metal Filter	-	-	-	-	-	-	-
Metal Filter	02800930 / 02800925	02800930 / 02800925	02800930 / 02800925	02800930 / 02800925	02800930 / 02800925	02800930 / 02800925	02800930 / 02800925
DUAL Filter (metal + active charcoal)	02800922 / 02800927	02800922 / 02800927	02800922 / 02800927	02800922 / 02800927	02800922 / 02800927	02800922 / 02800927	02800922 / 02800927
Active Charcoal Filter	02859318	02859318	02859318	02859318	02859318	02859318	02859398
Noiseless Flexible Duct	02893002	02893002	02893002	02893002	02893002	02893002	02893002

02137406	02136406	02139006	02137006	02136006	02059701	02078701	02027701	02059801	02078801	02027801
8422248356237	8422248356244	8422248356251	8422248356268	8422248356275	8422248355643	8422248355636	8422248355629	8422248355674	8422248355667	8422248355650
THALASSA 700GBK	THALASSA 600GBK	THALASSA 900GWH	THALASSA 700GWH	THALASSA 600GWH	JUNO+ 9000 GBK	JUNO+ 7000 GBK	JUNO+ 6000 GBK	JUNO+ 9000 GWH	JUNO+ 7000 GWH	JUNO+ 6000 GWH
Vertical	Vertical	Vertical	Vertical	Vertical	Vertical	Vertical	Vertical	Vertical	Vertical	Vertical
58,6	58,6	58,6	58,6	58,6	23,1	23,1	23,1	23,1	23,1	23,1
A	A	A	A	A	A+	A+	A+	A+	A+	A+
29,4	29,4	29,4	29,4	29,4	33,5	33,5	33,5	33,5	33,5	33,5
A	A	A	A	A	A	A	A	A	A	A
23,7	23,7	23,7	23,7	23,7	22,6	22,6	22,6	22,6	22,6	22,6
B	B	B	B	B	B	B	B	B	B	B
75,5	75,5	75,5	75,5	75,5	60,9	60,9	60,9	60,9	60,9	60,9
C	C	C	C	C	C	C	C	C	C	C
346	346	346	346	346	170	170	170	170	170	170
600	600	600	600	600	385	385	385	385	385	385
811	811	811	811	811	562	562	562	562	562	562
50	50	50	50	50	44	44	44	44	44	44
65	65	65	65	65	61	61	61	61	61	61
67	67	67	67	67	69	69	69	69	69	69
0,43	0,43	0,43	0,43	0,43	0,27	0,27	0,27	0,27	0,27	0,27
-	-	-	-	-	0	0	0	0	0	0
0,9	0,9	0,9	0,9	0,9	0,9	0,9	0,9	0,9	0,9	0,9
52,7	52,7	52,7	52,7	52,7	38,8	38,8	38,8	38,8	38,8	38,8
457,2	457,2	457,2	457,2	457,2	258	258	258	258	258	258
397	397	397	397	397	284	284	284	284	284	284
171,6	171,6	171,6	171,6	171,6	62,6	62,6	62,6	62,6	62,6	62,6
3	3	3	3	3	5	5	5	5	5	5
71	71	71	71	71	22,6	22,6	22,6	22,6	22,6	22,6
700	600	900	700	600	900	700	600	900	700	600
375	375	375	375	375	400	400	400	400	400	400
1130	1130	1130	1130	1130	1000	1000	1000	1000	1000	1000
815	815	815	815	815	820	820	820	820	820	820
150	150	150	150	150	150	150	150	150	150	150
BT3	BT3	BT3	BT3	BT3	T1DC	T1DC	T1DC	T1DC	T1DC	T1DC
3+1	3+1	3+1	3+1	3+1	5+1	5+1	5+1	5+1	5+1	5+1
280	280	280	280	280	110	110	110	110	110	110
450	450	450	450	450	250	250	250	250	250	250
470	470	470	470	470	315	315	315	315	315	315
SDX6i	SDX6i	SDX6i	SDX6i	SDX6i	TCD6i	TCD6i	TCD6i	TCD6i	TCD6i	TCD6i
√	√	√	√	√	√	√	√	√	√	√
√	√	√	√	√	√	√	√	√	√	√
Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic
1+1	1+1	1+1	1+1	1+1	1+1	1+1	1+1	1+1	1+1	1+1
-	-	-	-	-	-	-	-	-	-	-
SS Led	SS Led	SS Led	SS Led	SS Led	SS Led	SS Led	SS Led	SS Led	SS Led	SS Led
√	√	√	√	√	√	√	√	√	√	√
1	1	1	1	1	1	1	1	1	1	1
450	450	450	450	450	400	400	400	400	400	400
650	650	650	650	650	650	650	650	650	650	650
BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH
√	√	√	√	√	√	√	√	√	√	√
283	283	283	283	283	95	95	95	95	95	95
220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240
50	50	50	50	50	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
CLASE II	CLASE II	CLASE II	CLASE II	CLASE II	CLASS I	CLASS I	CLASS I	CLASS I	CLASS I	CLASS I
-	-	-	-	-	-	-	-	-	-	-
02861300	02861300	02861300	02861300	02861300	-	-	-	-	-	-
02861001	02861001	02861001	02861001	02861001	-	-	-	-	-	-
02861401	02861401	02861401	02861401	02861401	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-
02832004	02832004	02832004	02832004	02832004	02832004	02832004	02832004	02832004	02832004	02832004
-	-	-	-	-	-	-	-	-	-	-
02800930 / 02800925	02800930 / 02800925	02800930 / 02800925	02800930 / 02800925	02800930 / 02800925	02800915+02800949	02800915+02800949	02800915+02800949	02800915+02800949	02800915+02800949	02800915+02800949
02800922 / 02800927	02800922 / 02800927	02800922 / 02800927	02800922 / 02800927	02800922 / 02800927	02800921 / 02800927	02800921 / 02800927	02800921 / 02800927	02800921 / 02800927	02800921 / 02800927	02800921 / 02800927
02859398	02859398	02859398	02859398	02859398	02859394	02859394	02859394	02859394	02859394	02859394
02893002	02893002	02893002	02893002	02893002	02893002	02893002	02893002	02893002	02893002	02893002

Code	02059700	02078700	02027700	02059405	02078405	02027210	02059010	02078006
EAN	8422248355612	8422248355605	8422248355599	8422248102308	8422248102315	8422248102322	8422248102339	8422248102346
Model	JUNO 9000 GBK	JUNO 7000 GBK	JUNO 6000 GBK	WANDA 900 XGBK	WANDA 700 XGBK	WANDA 600 XGBK	WANDA 900 XGWH	WANDA 700 XGWH
Type	Vertical	Vertical	Vertical	Vertical	Vertical	Vertical	Vertical	Vertical
Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564								
AEC (Annual Energy consumption) (kWh/annum)	45,9	45,9	45,9	11,1	11,1	11,1	11,1	11,1
EEL class (Energy Efficiency Class)	A+	A+	A+	A++	A++	A++	A++	A++
FDE (Fluid Dynamic Efficiency)	27,6	27,6	27,6	29,5	29,5	29,5	29,5	29,5
FDE class (Fluid Dynamic Efficiency Class)	A	A	A	A	A	A	A	A
LE (Lighting Efficiency) (lux/W)	32	32	32	29,3	29,3	29,3	29,3	29,3
LE class (Lighting Efficiency Class)	A	A	A	A	A	A	A	A
GFE (Grease Filtering Efficiency)	67,9	67,9	67,9	76,1	76,1	76,1	76,1	76,1
GFE Class (Grease Filtering Efficiency class)	D	D	D	C	C	C	C	C
Air flow at minimum speed (m ³ /h)	170	170	170	207,2	207,2	207,2	207,2	207,2
Air flow at maximum speed (m ³ /h)	387,5	387,5	387,5	525,1	525,1	525,1	525,1	525,1
Air flow at intensive speed (TURBO) (m ³ /h)	428	428	428	-	-	-	-	-
Sound Power Level at minimum speed (dB)	50	50	50	39	39	39	39	39
Sound Power Level at maximum speed (dB)	64	64	64	59	59	59	59	59
Sound Power Level at intensive speed (TURBO) (dB)	70	70	70	-	-	-	-	-
Po (Power Consumption in off mode) (W)	0,46	0,46	0,46	0,44	0,44	0,44	0,44	0,44
Ps (Power Consumption in standby) (W)	0	0	0	-	-	-	-	-
Integration directive EU 66/2014								
f (Time Increase Factor)	0,9	0,9	0,9	0,9	0,883	0,883	0,883	0,883
EEL (Energy Efficiency Index)	40,2	40,2	40,2	34,9	38,6	38,6	38,6	38,6
QBEP (Flow Rate at Best Efficiency Point) (m ³ /h)	213	213	213	222,5	248,01	248,01	248,01	248,01
PBEP (Static Pressure Difference at Best Efficiency Point) (Pa)	261	261	261	129	178,05	178,05	178,05	178,05
WBEP (Electric Power Input at Best Efficiency Point) (W)	60,3	60,3	60,3	27	39,55	39,55	39,55	39,55
WL (Nominal Power Consumption of Lighting system) (W)	3	3	3	3	3	3	3	3
EMIDDLE (Average Illumination of Lighting system on Cooking surface) (lux)	161	161	161	88	163,8	163,8	163,8	163,8
External Dimensions								
Width (mm)	900	700	600	895	695	595	895	695
Depth (mm)	370	370	370	358	358	358	358	358
Total max height (mm)	1000	1000	1000	1122	1122	1122	1122	1122
Total min height (mm)	820	820	820	772	772	772	772	772
Outlet Diameter (mm)	150	150	150	150	150	150	150	150
Characteristics								
Motor	EY450	EY450	EY450	BLDC	BLDC	BLDC	BLDC	BLDC
Extraction Levels	5+1	5+1	5+1	5+1	5+1	5+1	5+1	5+1
Motor Maximum Power Consumption	70	70	70	70	70	70	70	70
Maximum Pressure	230	230	230	430	430	430	430	430
Intensive Speed (TURBO) Pressure	270	270	270	-	-	-	-	-
Control Type	TCD6i	TCD6i	TCD6i	T02	T02	T02	T02	T02
Automatic shut-down timer	√	√	√	√	√	√	√	√
Electronic Filter Saturation Indicator	√	√	√	-	-	-	-	-
Filter Type	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic
Anti-grease Filter Number	1	1	1	1	1	1	1	1
Inner Shield	-	-	-	-	-	-	-	-
Lighting								
Light Type	CSLED	CSLED	CSLED	LED	LED	LED	LED	LED
Adjustable Intensity Lighting	√	√	√	-	-	-	-	-
N° of Lamps	1	1	1	2	2	2	2	2
Installation								
Minimum height distance to a electric worktop hob (mm)	400	400	400	650	650	650	650	650
Minimum height distance to a gas worktop hob (mm)	650	650	650	650	650	650	650	650
Installation with Outlet tube to the exterior / Recirculating	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH
Easy Installation System	√	√	√	√	√	√	√	√
Electric Connection								
Total Rush Power (W)	73	73	73	73	73	73	73	73
Rated Voltage (V)	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240
Network Frequency (Hz)	50/60Hz	50/60Hz	50/60Hz	50 / 60	50 / 60	50 / 60	50 / 60	50 / 60
Electrical Insulation Class	CLASS I	CLASS I	CLASS I	CLASS I	CLASS I	CLASS I	CLASS I	CLASS I
Plug	-	-	-	√	√	√	√	√
Accessories								
Upper Decorative tube Extension	-	-	-	02861300	02861300	02861300	02861300	02861300
White Decorative Tube	-	-	-	-	-	-	-	-
Black Decorative Tube	-	-	-	02861401	02861401	02861401	02861401	02861401
Island Tube Enhancer	-	-	-	-	-	-	-	-
Check Valve	-	-	-	-	-	-	-	-
MAX PRO Metal Filter	-	-	-	-	-	-	-	-
Metal Filter	02800915	02800915	02800915	02800963	02800963	02800963	02800963	02800963
DUAL Filter (metal + active charcoal)	02800921	02800921	02800921	-	-	-	-	-
Active Charcoal Filter	02859488	02859488	02859488	02859492	02859492	02859492	02859492	02859492
Noiseless Flexible Duct	02893002	02893002	02893002	02893002	02893002	02893002	02893002	02893002

02027012	02059403	02032205	02032206	02059011	02032005	02032006	02029207	02021202	02060208	02029305	02021306	02132305
8422248102353	8422248108089	8422248102292	8422248102377	8422248346559	8422248102285	8422248102360	8422248101493	8422248101509	8422248102544	8422248068635	8422248068659	8422248073035
WANDA 600 XGWH	LENA 900 XGBK	LENA 600 XGBK	LENA 500 XGBK	LENA 900 GWH	LENA 600 XGWH	LENA 500 XGWH	LEGEND 900 XGBK	LEGEND 7000 XGBK	LEGEND 6000 XGBK	LEGEND 900 X	LEGEND 700 X	SYGMA 12010 X
Vertical	Vertical	Vertical	Vertical	Vertical	Vertical	Vertical	Box	Box	Box	Box	Box	Box
11,1	43,57	43,57	43,57	43,57	43,57	43,57	9,9	10,8	9,9	42,1	42,1	53,6
A++	B	B	B	B	B	B	A++	A++	A++	A	A	A
29,5	22,94	22,94	22,94	22,94	22,94	22,94	31,2	31,1	31,2	31,7	31,7	30,7
A	C	C	C	C	C	C	A	A	A	A	A	A
29,3	43,6	43,6	43,6	43,6	43,6	43,6	28,5	30	28,5	36	36	23,1
A	A	A	A	A	A	A	A	A	A	A	A	B
76,1	82,6	82,6	82,6	82,6	82,6	82,6	76,4	77,3	76,4	78,5	78,5	91,2
C	C	C	C	C	C	C	C	C	C	C	C	B
207,2	310	311,71	311,71	310	311,71	311,71	236,1	239,8	236,1	200	200	340
525,1	498,46	498,46	498,46	498,46	498,46	498,46	638,8	637,4	638,8	524	524	600
-	-	-	-	-	-	-	-	-	-	648	648	802
39	44,1	44,1	44,1	44,1	44,1	44,1	44	42	44	40	40	50
59	62,8	62,8	62,8	62,8	62,8	62,8	65	63	65	64	64	65
-	-	-	-	-	-	-	-	-	-	67	67	67
0,44	-	-	-	-	-	-	0,44	0,44	0,44	0,41	0,41	0,48
-	0,34	0,34	0,34	0,34	0,34	0,34	-	-	-	0	0	0,48
0,883	1,17	1,17	1,17	1,17	1,17	1,17	0,9	0,9	0,9	0,8	0,8	0,9
38,6	62,2	62,2	62,2	62,2	62,2	62,2	32,5	32	32,5	44,8	44,8	52,1
248,01	264,09	264,09	264,09	264,09	264,09	264,09	203,4	236,5	203,4	390,3	390,3	443,1
178,05	301,94	301,94	301,94	301,94	301,94	301,94	142	134	142	329	329	427,1
39,55	95,56	95,56	95,56	95,56	95,56	95,56	25,7	28,3	25,7	112,6	112,6	171
3	3	3	3	3	3	3	2	2	2	7	7	3
163,8	130,8	130,8	130,8	130,8	130,8	130,8	57	60	57	252	252	69
595	895	595	495	895	595	495	895	695	595	900	700	1200
358	385	385	385	385	385	385	500	500	500	505	505	496
1122	1092	1092	1092	1092	1092	1092	998	998	998	1035	1035	1045
772	742	742	742	742	742	742	548	548	548	635	635	730
150	150	150	150	150	150	150	150	150	150	150	150	150
BLDC	TT500	TT500	TT500	TT500	TT500	TT500	BLDC600	BLDC600	BLDC600	BTDCA	BTDCA	BT3
5*1	5*1	5*1	5*1	5*1	5*1	5*1	5*1	5*1	5*1	5*1	5*1	5*1
70	120	120	120	120	120	120	70	70	70	130	130	280
430	380	380	380	380	380	380	220	220	220	455	455	450
-	-	-	-	-	-	-	-	-	-	470	470	470
T02	T02	T02	T02	T02	T02	T02	T02	T02	T02	NL5i	NL5i	SX4i
√	√	√	√	√	√	√	√	√	√	√	√	√
-	-	-	-	-	-	-	-	-	-	√	√	√
Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Decorative stainless steel
1	1	1	1	1	1	1	3	2	2	3	2	4
-	-	-	-	-	-	-	-	-	-	-	-	-
LED	LED	LED	LED	LED	LED	LED	CSLED	CSLED	CSLED	EcoLed	EcoLed	SS Led
-	-	-	-	-	-	-	-	-	-	√	√	√
2	2	2	2	2	2	2	1	1	1	2	2	1
650	650	650	650	650	650	650	650	650	650	650	650	650
650	650	650	650	650	650	650	650	650	650	650	650	650
BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH
√	√	√	√	√	√	√	√	√	√	√	√	√
73	123	123	123	123	123	123	72	72	72	137	137	283
220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240
50 / 60	50 / 60	50 / 60	50 / 60	50 / 60	50 / 60	50 / 60	50-60	50-60	50-60	50	50	50
CLASS I	CLASS I	CLASS I	CLASS I	CLASS I	CLASS I	CLASS I	CLASS I	CLASS I	CLASS I	CLASS II	CLASS II	CLASS II
√	√	√	√	√	√	√	√	√	√	EU - 2 pins	EU - 2 pins	-
02861300	02861300	02861300	02861300	02861300	02861300	02861300	02861300	02861300	02861300	02861300	02861300	02861300
-	-	-	-	-	-	-	-	-	-	-	-	-
02861401	02861401	02861401	02861401	02861401	02861401	02861401	02861401	02861401	02861401	02861401	02861401	02861401
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	02832004	02832004	02832004
-	-	-	-	-	-	-	-	-	-	02800917	02800917	-
02800963	02800963	02800963	02800963	02800963	02800963	02800963	02800974	02800973	02800975	02800200*	02800200*	02800930
-	-	-	-	-	-	-	-	-	-	-	-	02800922
02859492	02859492	02859492	02859492	02859492	02859492	02859492	02859492	02859492	02859492	02859398	02859398	02859398
02893002	02893002	02893002	02893002	02893002	02893002	02893002	02893002	02893002	02893002	02893002	02893002	02893002

Code	02075305	02021310	02060310	02075401	02021400	02060400	02029602
EAN	8422248110051	8422248110068	8422248110075	8422248110082	8422248357272	8422248357289	8422248093422
Model	SYGMA 9010 X	SYGMA 7010 X	SYGMA 6010 X	SYGMA 9010 BK	SYGMA 7010 BK	SYGMA 6010 BK	S PLUS 9010 X
Type	Box	Box	Box	Box	Box	Box	Box
Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564							
AEC (Annual Energy consumption) (kWh/annum)	53,6	53,6	53,6	53,6	53,6	53,6	100,9
EEL class (Energy Efficiency Class)	A	A	A	A	A	A	C
FDE (Fluid Dynamic Efficiency)	30,7	30,7	30,7	30,7	30,7	30,7	16,3
FDE class (Fluid Dynamic Efficiency Class)	A	A	A	A	A	A	D
LE (Lighting Efficiency) (lux/W)	23,1	23,1	23,1	23,1	23,1	23,1	22,5
LE class (Lighting Efficiency Class)	B	B	B	B	B	B	B
GFE (Grease Filtering Efficiency)	91,2	91,2	91,2	91,2	91,2	91,2	88,5
GFE Class (Grease Filtering Efficiency class)	B	B	B	B	B	B	B
Air flow at minimum speed (m ³ /h)	340	340	340	340	340	340	361
Air flow at maximum speed (m ³ /h)	600	600	600	600	600	600	637
Air flow at intensive speed (TURBO) (m ³ /h)	802	802	802	802	802	802	-
Sound Power Level at minimum speed (dB)	50	50	50	50	50	50	69
Sound Power Level at maximum speed (dB)	65	65	65	65	65	65	74
Sound Power Level at intensive speed (TURBO) (dB)	67	67	67	67	67	67	-
Po (Power Consumption in off mode) (W)	0,48	0,48	0,48	0,48	0,48	0,48	0
Ps (Power Consumption in standby) (W)	0,48	0,48	0,48	0,48	0,48	0,48	-
Integration directive EU 66/2014							
f (Time Increase Factor)	0,9	0,9	0,9	0,9	0,9	0,9	1,4
EEL (Energy Efficiency Index)	52,1	52,1	52,1	52,1	52,1	52,1	82,4
QBEP (Flow Rate at Best Efficiency Point) (m ³ /h)	443,1	443,1	443,1	443,1	443,1	443,1	375,3
PBEP (Static Pressure Difference at Best Efficiency Point) (Pa)	427,1	427,1	427,1	427,1	427,1	427,1	295
WBEP (Electric Power Input at Best Efficiency Point) (W)	171	171	171	171	171	171	188,8
WL (Nominal Power Consumption of Lighting system) (W)	3	3	3	3	3	3	6
EMIDDLE (Average Illumination of Lighting system on Cooking surface) (lux)	69	69	69	69	69	69	135
External Dimensions							
Width (mm)	900	700	600	900	700	600	900
Depth (mm)	495	495	495	495	495	495	500
Total max height(mm)	990	990	990	990	990	990	1045
Total min height(mm)	745	745	745	745	745	745	745
Outlet Diameter (mm)	150	150	150	150	150	150	150
Characteristics							
Motor	BT3	BT3	BT3	BT3	BT3	BT3	M3R
Extraction Levels	5+1	5+1	5+1	5+1	5+1	5+1	5+1
Motor Maximum Power Consumption	280	280	280	280	280	280	270
Maximum Pressure	450	450	450	450	450	450	430
Intensive Speed (TURBO) Pressure	470	470	470	470	470	470	-
Control Type	SX4i	SX4i	SX4i	SX4i	SX4i	SX4i	Mechanic
Automatic shut-down timer	√	√	√	√	√	√	-
Electronic Filter Saturation Indicator	√	√	√	√	√	√	-
Filter Type	Decorative s. steel	Decorative s. steel	Decorative s. steel	Decorative s. steel	Decorative s. steel	Decorative s. steel	Metallic
Anti-grease Filter Number	3	2	2	3	2	2	3
Inner Shield	-	-	-	-	-	-	-
Lighting							
Light Type	SS Led	SS Led	SS Led	SS Led	SS Led	SS Led	CSLED
Adjustable Intensity Lighting	√	√	√	√	√	√	-
N° of Lamps	1	1	1	1	1	1	2
Installation							
Minimum height distance to a electric worktop hob (mm)	650	650	650	650	650	650	650
Minimum height distance to a gas worktop hob (mm)	650	650	650	650	650	650	650
Installation with Outlet tube to the exterior / Recirculating	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH
Easy Installation System	√	√	√	√	√	√	√
Electric Connection							
Total Rush Power (W)	283	283	283	283	283	283	277
Rated Voltage (V)	220-240	220-240	220-240	220-240	220-240	220-240	220-240
Network Frequency (Hz)	50	50	50	50	50	50	50
Electrical Insulation Class	CLASS II	CLASS II	CLASS II	CLASS II	CLASS II	CLASS II	CLASS II
Plug	-	-	-	-	-	-	-
Accessories							
Upper Decorative tube Extension	02861300	02861300	02861300	02861300	02861300	02861300	02861300
White Decorative Tube	-	-	-	-	-	-	-
Black Decorative Tube	02861401	02861401	02861401	02861401	02861401	02861401	02861401
Island Tube Enhancer	-	-	-	-	-	-	-
Check Valve	02832004	02832004	02832004	02832004	02832004	02832004	02832001
MAX PRO Metal Filter	-	-	-	-	-	-	-
Metal Filter	02861301	02861301	02861301	02861301	02861301	02861301	02861301
DUAL Filter (metal + active charcoal)	'02800922	'02800922	'02800922	'02800922	'02800922	'02800922	'02800922
Active Charcoal Filter	02859398	02859398	02859398	02859398	02859398	02859398	02859398
Noiseless Flexible Duct	02893002	02893002	02893002	02893002	02893002	02893002	02893002

02021602	02060602	02029309	02021309	02060309	02060609	02008107	02005107	02005407	02008299	02005299
8422248093446	8422248093453	8422248108706	8422248108690	8422248108683	8422248356978	8422248356992	8422248356985	8422248357005	8422248108102	8422248097413
S PLUS 7010 X	S PLUS 6010 X	ST-9000 X	ST-7000 X	ST-6000 X	SK 6000 X	CK 9000 X	CK 6000 X	CK 6000 BK	CG5-T900 X	CG5-T600 X
Box	Box	Box	Box	Box	Box	Curved Glass	Curved Glass	Curved Glass	Curved Glass	Curved Glass
98,7	98,7	36,4	36	36,1	24,7	24,7	24,7	24,7	47,6	46,4
C	C	C	C	C	A	A	A	A	B	B
16,3	16,3	10,12	9,84	9,48	25,6	25,6	25,6	25,6	22,2	20,4
D	D	E	E	E	B	B	B	B	C	C
30,3	30,3	39,3	38,9	39,6	31,6	31,6	31,6	31,6	49,33	49,33
A	A	A	A	A	A	A	A	A	A	A
88,5	88,5	70,46	70,11	72,14	74,6	74,6	74,6	74,6	82,87	73,86
B	B	D	D	D	D	D	D	D	C	D
361	361	165	161	166	166	166	166	166	296	304,5
637	637	302	294	292	380	380	380	380	495	499
-	-	-	-	-	-	-	-	-	-	-
69	69	58	58	58	52	52	52	52	45,5	43,5
74	74	62	63,5	62,4	68	68	68	68	66	67,6
-	-	-	-	-	-	-	-	-	-	-
0	0	0	0	0	0	0	0	0	0	0
-	-	-	-	-	-	-	-	-	-	-
1,4	1,4	1,6	1,7	1,7	1,1	1,1	1,1	1,1	1,2	1,27
81,7	81,7	74,9	75	75,4	51,7	51,7	51,7	51,7	64,4	66,7
375,3	375,3	192,63	172,17	171	216,1	216,1	216,1	216,1	287,5	280
295	295	110,53	118,37	114,29	238,5	238,5	238,5	238,5	288	270
188,8	188,8	58,45	57,55	57,27	56	56	56	56	103,6	95,7
3	3	2	2	2	3	3	3	3	3	3
91	91	79	78	79	95	95	95	95	148	148
700	600	900	700	600	600	900	600	600	900	600
500	500	500	500	500	470	470	470	470	470	470
1045	1045	998	998	998	925	915	915	915	776	776
745	745	548	548	548	640	670	670	670	426	426
150	150	150	150	150	150	150	150	150	150	150
M3R	M3R	TT300	TT300	TT300	K10	K10	K10	K10	TT500	TT500
5*1	5*1	5*1	5*1	5*1	3	3	3	3	5*1	5*1
270	270	65	65	65	100	100	100	100	120	120
430	430	172,85	171,83	174,66	293	293	293	293	435	430
-	-	-	-	-	-	-	-	-	-	-
Mechanic	Mechanic	Mechanic	Mechanic	Mechanic	Mechanic	Mechanic	Mechanic	Mechanic	Mechanic	Mechanic
-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-
Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic
2	2	3	2	2	2	3	2	2	1	1
-	-	-	-	-	-	-	-	-	-	-
CSLED	CSLED	CSLED	CSLED	CSLED	CSLED	CSLED	CSLED	CSLED	LED	LED
-	-	-	-	-	-	-	-	-	-	-
1	1	1	1	1	1	1	1	1	2	2
650	650	650	650	650	650	650	650	650	650	650
650	650	650	650	650	650	650	650	650	650	650
BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH
√	√	√	√	√	√	√	√	√	√	√
277	277	67	67	67	103	103	103	103	123	123
220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240
50	50	50	50	50	50	50	50	50	50/60	50/60
CLASS II	CLASS II	CLASS I	CLASS I	CLASS I	CLASS II	CLASS II	CLASS II	CLASS II	CLASS I	CLASS I
-	-	-	-	-	-	-	-	-	VDE	VDE
02861300	02861300	02861300	02861300	02861300	02861302	-	-	-	02861300	02861300
-	-	-	-	-	-	-	-	-	-	-
02861401	02861401	02861401	02861401	02861401	-	-	-	-	02861401	02861401
-	-	-	-	-	-	-	-	-	-	-
02832001	02832001	-	-	-	02832004	02832004	02832004	02832004	-	-
-	-	-	-	-	02800917	-	-	-	-	-
02861301	02861301	02800984	02800983	02800963	02800905	02819000*	02800905	02800905	02800963	02800963
'02800922	'02800922	02859495	02859495	02859495	02800918	-	-	-	02800922 / 02800927	02800922 / 02800927
02859398	02859398	02859398	02859398	02859398	02859489	02859489	02859489	02859489	2859398	2859398
02893002	02893002	02893002	02893002	02893002	02893002	02893002	02893002	02893002	02893002	02893002

Code	02157309	02051303	02093303	02050305	02004310	02003307	02003310
EAN	8422248062299	8422248061827	8422248061834	8422248061841	8422248190596	8422248101615	8422248190602
Model	BETA 1200 X	BETA 900 X	BETA 700 X	BETA 600 X	OMEGA 900 X / M	OMEGA 7500 X	OMEGA 700 X / M
Type	Chimney	Chimney	Chimney	Chimney	Chimney	Chimney	Chimney
Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564							
AEC (Annual Energy consumption) (kWh/annum)	56,3	56,3	56,3	56,3	105,4	40,9	95,4
EEL class (Energy Efficiency Class)	A	A	A	A	C	A	C
FDE (Fluid Dynamic Efficiency)	30,6	30,6	30,6	30,6	20	30,4	17,8
FDE class (Fluid Dynamic Efficiency Class)	A	A	A	A	C	A	D
LE (Lighting Efficiency) (lux/W)	36	36	36	36	21	37	26
LE class (Lighting Efficiency Class)	A	A	A	A	B	A	B
GFE (Grease Filtering Efficiency)	91,2	91,2	91,2	91,2	90,3	78,8	90,3
GFE Class (Grease Filtering Efficiency class)	B	B	B	B	B	C	B
Air flow at minimum speed (m ³ /h)	340	340	340	340	385	412,5	385
Air flow at maximum speed (m ³ /h)	600	600	600	600	645	592,9	645
Air flow at intensive speed (TURBO) (m ³ /h)	850	850	850	850	-	-	-
Sound Power Level at minimum speed (dB)	50	50	50	50	57,8	58	57,8
Sound Power Level at maximum speed (dB)	65	65	65	65	71,8	68	71,8
Sound Power Level at intensive speed (TURBO) (dB)	67	67	67	67	-	-	-
Po (Power Consumption in off mode) (W)	0,26	0,26	0,26	0,26	0	0	0
Ps (Power Consumption in standby) (W)	0	0	0	0	0	-	0
Integration directive EU 66/2014							
f (Time Increase Factor)	0,9	0,9	0,9	0,9	1,3	0,9	1,4
EEL (Energy Efficiency Index)	53,7	53,7	53,7	53,7	77,6	49,9	81,3
QBEP (Flow Rate at Best Efficiency Point) (m ³ /h)	416,9	416,9	416,9	416,9	458,1	344,7	371,8
PBEP (Static Pressure Difference at Best Efficiency Point) (Pa)	411	411	411	411	333,8	379	314
WBEP (Electric Power Input at Best Efficiency Point) (W)	155,7	155,7	155,7	155,7	213	119,4	182,5
WL (Nominal Power Consumption of Lighting system) (W)	7	7	7	7	6	2	3
EMIDDLE (Average Illumination of Lighting system on Cooking surface) (lux)	252	252	252	252	126	73	78
External Dimensions							
Width (mm)	1200	900	700	600	900	745	700
Depth (mm)	500	500	500	500	500	480	500
Total max height (mm)	1060	1020	1020	1020	1020	990	1020
Total min height (mm)	660	720	720	720	720	640	720
Outlet Diameter (mm)	150	150	150	150	150	150	150
Characteristics							
Motor	BT3	BT3	BT3	BT3	M3R	TT600	M3R
Extraction Levels	5+1	5+1	5+1	5+1	5+1	5+1	5+1
Motor Maximum Power Consumption	280	280	280	280	270	200	270
Maximum Pressure	450	450	450	450	430	470	430
Intensive Speed (TURBO) Pressure	470	470	470	470	-	-	-
Control Type	VL3i	VL3i	VL3i	VL3i	Mechanic	Mechanic	Mechanic
Automatic shut-down timer	√	√	√	√	-	-	-
Electronic Filter Saturation Indicator	-	-	-	-	-	-	-
Filter Type	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic
Anti-grease Filter Number	4	3	2	2	3	2	2
Inner Shield	-	-	-	-	-	-	-
Lighting							
Light Type	EcoLed	EcoLed	EcoLed	EcoLed	CSLED	CSLED	CSLED
Adjustable Intensity Lighting	-	-	-	-	-	-	-
N° of Lamps	2	2	2	2	2	1	1
Installation							
Minimum height distance to a electric worktop hob (mm)	650	650	650	650	650	650	650
Minimum height distance to a gas worktop hob (mm)	650	650	650	650	650	650	650
Installation with Outlet tube to the exterior / Recirculating	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH
Easy Installation System	√	√	√	√	√	√	√
Electric Connection							
Total Rush Power (W)	287	287	287	287	276	202	273
Rated Voltage (V)	220-240	220-240	220-240	220-240	220-240	220-240	220-240
Network Frequency (Hz)	50	50	50	50	50	50/60	50
Electrical Insulation Class	CLASS II	CLASS II	CLASS II	CLASS II	CLASS II	CLASS I	CLASS II
Plug	EU - 2 pins	EU - 2 pins	EU - 2 pins	EU - 2 pins	No	VDE	No
Accessories							
Upper Decorative tube Extension	02861300	02861300	02861300	02861300	02861300	02861300	02861300
White Decorative Tube	-	-	-	-	-	-	-
Black Decorative Tube	02861401	02861401	02861401	02861401	02861401	02861401	02861401
Island Tube Enhancer	-	-	-	-	-	-	-
Check Valve	02832004	02832004	02832004	02832004	02832001	-	02832001
MAX PRO Metal Filter	02800917	02800917	02800917	02800917	02800917	-	02800917
Metal Filter	02800200*	02800200*	02800200*	02800200*	02800905*	02800976	02800905*
DUAL Filter (metal + active charcoal)	02800918	02800918	02800918	02800918	02800918	02800918	02800918
Active Charcoal Filter	2859398	2859398	2859398	2859398	2859398	2859398	2859398
Noiseless Flexible Duct	02893002	02893002	02893002	02893002	02893002	-	02893002

02002310	02004410	02002410	02004010	02003010	02002010	02061606	02061405	02061105	02088303	02063399
8422248109826	8422248190633	8422248109833	8422248190619	8422248190626	8422248109819	8422248357012	8422248357074	8422248357081	8422248087315	8422248095303
OMEGA 600 X /M	OMEGA 900 BK /M	OMEGA 600 BK /M	OMEGA 900 WH /M	OMEGA 700 WH /M	OMEGA 600 WH /M	VK 6000 X	VK 6000 BK	VK 6000 WH	V-500 X	V3-1900 X
Chimney	Chimney	Chimney	Chimney	Chimney	Chimney	Chimney	Chimney	Chimney	Chimney	Chimney
95,4	105,4	95,4	105,4	95,4	95,4	24,8	24,8	24,8	53,7	29,8
C	C	C	C	C	C	A	A	A	C	B
17,8	20	17,8	20	17,8	17,8	28,5	28,5	28,5	10,3	13,9
D	C	D	C	D	D	B	B	B	E	D
26	21	26	21	26	26	31,6	31,6	31,6	8,4	35
B	B	B	B	B	B	A	A	A	E	A
90,3	90,3	90,3	90,3	90,3	90,3	71,4	71,4	71,4	71,4	65,3
B	B	B	B	B	B	D	D	D	D	D
385	385	385	385	385	385	166	166	166	210	166,7
645	645	645	645	645	645	395	395	395	420	335,8
-	-	-	-	-	-	-	-	-	-	-
57,8	57,8	57,8	57,8	57,8	57,8	49	49	49	53	51
71,8	71,8	71,8	71,8	71,8	71,8	67	67	67	65	66
-	-	-	-	-	-	-	-	-	-	-
0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	-	-	-	0	-
1,4	1,3	1,4	1,3	1,4	1,4	1	1	1	1,6	1,5
81,3	77,6	81,3	77,6	81,3	81,3	48,5	48,5	48,5	84,4	66,4
371,8	458,1	371,8	458,1	371,8	371,8	255,1	255,1	255,1	220	202,1
314	333,8	314	333,8	314	314	249,1	249,1	249,1	130	129
182,5	213	182,5	213	182,5	182,5	62	62	62	76,9	52,1
3	6	3	6	3	3	3	3	3	11	1,7
78	126	78	126	78	78	95	95	95	208,8	63
600	900	600	900	700	600	600	600	600	700	895
500	500	500	500	500	500	475	475	475	475	480
1020	1020	1020	1020	1020	1020	910	910	910	910	923
720	720	720	720	720	720	670	670	670	610	573
150	150	150	150	150	150	150	150	150	150	150
M3R	M3R	M3R	M3R	M3R	M3R	K10	K10	K10	K7 PLUS	TT300
5*1	5*1	5*1	5*1	5*1	5*1	3	3	3	5*1	5*1
270	270	270	270	270	270	100	100	100	95	65
430	430	430	430	430	430	290,8	290,8	290,8	200	177
-	-	-	-	-	-	-	-	-	-	-
Mechanic	Mechanic	Mechanic	Mechanic	Mechanic	Mechanic	Mechanic	Mechanic	Mechanic	Mechanic	Mechanic
-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-
Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic
1	3	1	3	2	1	2	2	2	2	3
-	-	-	-	-	-	-	-	-	-	-
CSLED	CSLED	CSLED	CSLED	CSLED	CSLED	CSLED	CSLED	CSLED	LED E-14	CSLED
-	-	-	-	-	-	-	-	-	-	-
1	2	1	2	1	1	1	1	1	2	1
650	650	650	650	650	650	650	650	650	650	650
650	650	650	650	650	650	650	650	650	650	650
BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH
√	√	√	√	√	√	√	√	√	√	√
273	276	273	276	273	273	103	103	103	106	67
220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240
50	50	50	50	50	50	50	50	50	50	50
CLASS II	CLASS II	CLASS II	CLASS II	CLASS II	CLASS II	CLASS II	CLASS II	CLASS II	CLASS II	CLASS I
No	No	No	No	No	No	-	-	-	EU - 2 pins	VDE
02861300	02861300	02861300	02861300	02861300	02861300	02862302	02862302	02862302	02861300	02861300
-	-	-	-	-	-	-	-	-	-	-
02861401	02861401	02861401	02861401	02861401	02861401	-	-	-	02861401	02861401
-	-	-	-	-	-	-	-	-	-	-
02832001	02832001	02832001	02832001	02832001	02832001	02832004	02832004	02832004	02832004	-
02800917	02800917	02800917	02800917	02800917	02800917	02800917	02800917	02800917	02800917	-
02800905*	02800905*	02800905*	02800905*	02800905*	02800905*	02800905*	02800905*	02800905*	02800905*	02800995
02800918	02800918	02800918	02800918	02800918	02800918	02800918	02800918	02800918	02800918	-
2859398	2859398	2859398	2859398	2859398	2859398	02859489	02859489	02859489	2859398	02849495
02893002	02893002	02893002	02893002	02893002	02893002	02893002	02893002	02893002	02893002	02893002

Code	02061399	02061799	02149402	02148402	02165201	02189005	02181308	02180308
EAN	8422248095273	8422248110198	8422248084161	8422248084178	8422248055529	8422248093729	8422248110556	8422248198547
Model	V3-T600 X	V3-T600 WH	Q-7790 BK	Q-7760 BK	CHORUS XBK	TENTA 90 GWH	CORONA X 120	CORONA X 100
Type	Chimney	Chimney	Chimney	Chimney	MW Box	Integrated	Integrated	Integrated
Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564								
AEC (Annual Energy consumption) (kWh/annum)	29,8	29,8	95,7	95,7	49	24,7	55,5	51,9
EEL class (Energy Efficiency Class)	B	B	C	C	C	A+	A	A
FDE (Fluid Dynamic Efficiency)	13,9	13,9	17,8	17,8	9,8	37,5	30,6	30,6
FDE class (Fluid Dynamic Efficiency Class)	D	D	D	D	E	A	A	A
LE (Lighting Efficiency) (lux/W)	44	44	36	36	36	23,7	16,1	22,3
LE class (Lighting Efficiency Class)	A	A	A	A	A	B	C	B
GFE (Grease Filtering Efficiency)	65,3	65,3	90,3	90,3	74,6	85,79	84,27	84,2
GFE Class (Grease Filtering Efficiency class)	D	D	B	B	D	B	C	C
Air flow at minimum speed (m ³ /h)	166,7	166,7	385	385	210	245	340	340
Air flow at maximum speed (m ³ /h)	335,8	335,8	645	645	400	509,4	600	600
Air flow at intensive speed (TURBO) (m ³ /h)	-	-	-	-	-	765,3	850	850
Sound Power Level at minimum speed (dB)	51	51	58	58	50	46	50	50
Sound Power Level at maximum speed (dB)	66	66	72	72	62	63	65	65
Sound Power Level at intensive speed (TURBO) (dB)	-	-	-	-	-	67	67	67
Po (Power Consumption in off mode) (W)	0	0	0	0	0	0,49	0,45	0,26
Ps (Power Consumption in standby) (W)	-	-	0	0	0	0	0	0
Integration directive EU 66/2014								
f (Time Increase Factor)	1,5	1,5	1,4	1,4	1,6	0,7	0,9	0,9
EEL (Energy Efficiency Index)	66,4	66,4	80,1	80,1	82,6	40,3	53,3	53,3
QBEP (Flow Rate at Best Efficiency Point) (m ³ /h)	202,1	202,1	371,8	371,8	208,6	346,6	416,9	416,9
PBEP (Static Pressure Difference at Best Efficiency Point) (Pa)	129	129	314	314	123	298	411	411
WBEP (Electric Power Input at Best Efficiency Point) (W)	52,1	52,1	182,5	182,5	72,9	76,6	155,7	155,7
WL (Nominal Power Consumption of Lighting system) (W)	1,7	1,7	7	7	7	7	6	3
EMIDDLE (Average Illumination of Lighting system on Cooking surface) (lux)	74	74	252	252	252	166	96,6	67
External Dimensions								
Width (mm)	595	595	900	600	598	900	1195	995
Depth (mm)	480	480	560	560	470	310-350	310-350	310-350
Total max height(mm)	923	923	1140	1110	1140	331	339	334
Total min height(mm)	573	573	720	655	775	331	339	334
Outlet Diameter (mm)	150	150	150	150	150	150	150	150
Characteristics								
Motor	TT300	TT300	M3R	M3R	K7 PLUS	BT4DC	BT3	BT3
Extraction Levels	5+1	5+1	5+1	5+1	5+1	5+1	5+1	5+1
Motor Maximum Power Consumption	65	65	270	270	95	135	280	280
Maximum Pressure	177	177	430	430	200	357	450	450
Intensive Speed (TURBO) Pressure	-	-	-	-	-	365	470	470
Control Type	Mechanic	Mechanic	Mechanic	Mechanic	Mechanic	TCD6i	VL4i	VL4i
Automatic shut-down timer	-	-	-	-	-	√	√	√
Electronic Filter Saturation Indicator	-	-	-	-	-	√	-	-
Filter Type	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic
Anti-grease Filter Number	3	3	2	2	2	3	2	2
Inner Shield	-	-	-	-	-	-	-	-
Lighting								
Light Type	CSLED	CSLED	EcoLed	EcoLed	EcoLed	SSLED	Eco Led Strip	Eco Led Strip
Adjustable Intensity Lighting	-	-	-	-	-	√	-	-
N° of Lamps	1	1	2	2	2	1	2	1
Installation								
Minimum height distance to a electric worktop hob (mm)	650	650	650	650	592	550	550	550
Minimum height distance to a gas worktop hob (mm)	650	650	650	650	692	650	650	650
Installation with Outlet tube to the exterior / Recirculating	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH
Easy Installation System	√	√	√	√	√	√	√	√
Electric Connection								
Total Rush Power (W)	67	67	277	277	102	146	286	283
Rated Voltage (V)	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240
Network Frequency (Hz)	50	50	50	50	50	50-60	50	50
Electrical Insulation Class	CLASS I	CLASS I	CLASS II	CLASS II	CLASS II	CLASS I	CLASS II	CLASS II
Plug	VDE	VDE	EU - 2 pins	EU - 2 pins	EU - 2 pins	-	-	-
Accessories								
Upper Decorative tube Extension	02861300	02861300	02861300	02861300	02861300	02861300	02861300	02861300
White Decorative Tube	-	-	-	-	-	-	-	-
Black Decorative Tube	02861401	02861401	02861401	02861401	02861401	02861401	02861401	02861401
Island Tube Enhancer	-	-	-	-	-	-	-	-
Check Valve	-	-	02832001	02832001	02832004	02832008	02832004	02832004
MAX PRO Metal Filter	-	-	02800917	-	02800917	-	-	-
Metal Filter	02800995	02800995	02800905	02800940	02800905*	02811000	02800205	02800205
DUAL Filter (metal + active charcoal)	-	-	02800918	-	02800918	02811003	-	-
Active Charcoal Filter	02849495	02849495	02859391	02859391	02859394	02859318	02859398	02859398
Noiseless Flexible Duct	02893002	02893002	02893002	02893002	02893002	02893002	02893002	02893002

02189308	02188308	02187308	02186308	02189400	02186400	02186010	02189309	02188309	02187309	02186309
8422248110549	8422248110532	8422248110525	8422248110518	8422248348782	8422248198257	8422248355216	8422248110587	8422248356022	8422248351928	8422248110570
CORONA X 90	CORONA 80	CORONA X 70	CORONA X 60	CORONA BK 90 /B	CORONA BK 60	CORONA WH 60	ARMONIA 90 X	ARMONIA 80 X	ARMONIA 70 X	ARMONIA 60 X
Integrated	Integrated	Integrated	Integrated	Integrated	Integrated	Integrated	Integrated	Integrated	Integrated	Integrated
51,9	51,9	51,9	51,9	51,9	51,9	51,9	100,9	100,9	100,9	100,9
A	A	A	A	A	A	A	C	C	C	C
30,6	30,6	30,6	30,6	30,6	30,6	30,6	16,3	16,3	16,3	16,3
A	A	A	A	A	A	A	D	D	D	D
22,3	22,3	22,3	22,3	22,3	22,3	22,3	21,4	21,4	21,4	21,4
B	B	B	B	B	B	B	B	B	B	B
84,2	84,2	84,2	84,2	84,2	84,2	84,2	88,5	88,5	88,5	88,5
C	C	C	C	C	C	C	B	B	B	B
340	340	340	340	340	340	340	385	385	385	385
600	600	600	600	600	600	600	645	645	645	645
850	850	850	850	850	850	850	-	-	-	-
50	50	50	50	50	50	50	56	56	56	56
65	65	65	65	65	65	65	70	70	70	70
67	67	67	67	67	67	67	-	-	-	-
0,26	0,26	0,26	0,26	0,26	0,26	0,26	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0
0,9	0,9	0,9	0,9	0,9	0,9	0,9	1,4	1,4	1,4	1,4
53,3	53,3	53,3	53,3	53,3	53,3	53,3	82,4	82,4	82,4	82,4
416,9	416,9	416,9	416,9	416,9	416,9	416,9	375,3	375,3	375,3	375,3
411	411	411	411	411	411	411	295	295	295	295
155,7	155,7	155,7	155,7	155,7	155,7	155,7	188,8	188,8	188,8	188,8
3	3	3	3	3	3	3	6	6	6	6
67	67	67	67	67	67	67	128,3	128,3	128,3	128,3
895	795	695	595	895	595	595	898	798	698	598
310-350	310-350	310-350	310-350	310-350	310-350	310-350	310-350	310-350	310-350	310-350
334	334	334	334	334	334	334	280	280	280	280
334	334	334	334	334	334	334	280	280	280	280
150	150	150	150	150	150	150	150	150	150	150
BT3	BT3	BT3	BT3	BT3	BT3	BT3	M3R	M3R	M3R	M3R
5*1	5*1	5*1	5*1	5*1	5*1	5*1	5*1	5*1	5*1	5*1
280	280	280	280	280	280	280	270	270	270	270
450	450	450	450	450	450	450	430	430	430	430
470	470	470	470	470	470	470	-	-	-	-
VL4i	VL4i	VL4i	VL4i	VL4i	VL4i	VL4i	Mechanic	Mechanic	Mechanic	Mechanic
√	√	√	√	√	√	√	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-
Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic
2	2	2	2	2	2	2	2	2	2	2
-	-	-	-	-	-	-	-	-	-	-
Eco Led Strip	Eco Led Strip	Eco Led Strip	Eco Led Strip	Eco Led Strip	Eco Led Strip	Eco Led Strip	CSLED	CSLED	CSLED	CSLED
-	-	-	-	-	-	-	-	-	-	-
1	1	1	1	1	1	1	2	2	2	2
550	550	550	550	550	550	550	550	550	550	550
650	650	650	650	650	650	650	650	650	650	650
BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH
√	√	√	√	√	√	√	√	√	√	√
283	283	283	283	283	283	283	276	276	276	276
220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240
50	50	50	50	50	50	50	50	50	50	50
CLASS II	CLASS II	CLASS II	CLASS II	CLASS II	CLASS II	CLASS II	CLASE I	CLASE I	CLASE I	CLASE I
-	-	-	-	-	-	-	-	-	-	-
02861300	02861300	02861300	02861300	02861300	02861300	02861300	02861300	02861300	02861300	02861300
-	-	-	-	-	-	-	-	-	-	-
02861401	02861401	02861401	02861401	02861401	02861401	02861401	02861401	02861401	02861401	02861401
-	-	-	-	-	-	-	-	-	-	-
02832004	02832004	02832004	02832004	02832004	02832004	02832004	02832001	02832001	02832001	02832001
-	-	-	-	-	-	-	-	-	-	-
02800205	02800210	02800943	02800205	02800205	02800205	02800205	02800207	02801002	02801002	02800211
-	-	-	-	-	-	-	02800215	02801003	02801003	02800216
02859398	02859398	02859398	02859398	02859398	02859398	02859398	02859398	02859398	02859398	02859398
02893002	02893002	02893002	02893002	02893002	02893002	02893002	02893002	02893002	02893002	02893002

Code	02184309	02187309	02186409	02131208	02130208	02131207	02130207
EAN	8422248110563	8422248351928	8422248355995	8422248078320	8422248078306	8422248078313	8422248078290
Model	ARMONIA 45 X	ARMONIA 70 X	ARMONIA 60 BK	GC DUAL 75 BK	GC DUAL 45 BK	GC DUAL 75 WH	GC DUAL 45 WH
Type	Integrated	Integrated	Integrated	Canopy	Canopy	Canopy	Canopy
Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564							
AEC (Annual Energy consumption) (kWh/annum)	100,9	100,9	100,9	58,3	58,3	58,3	58,3
EEL class (Energy Efficiency Class)	C	C	C	A	A	A	A
FDE (Fluid Dynamic Efficiency)	16,3	16,3	16,3	30,2	30,2	30,2	30,2
FDE class (Fluid Dynamic Efficiency Class)	D	D	D	A	A	A	A
LE (Lighting Efficiency) (lux/W)	21,4	21,4	21,4	16,1	16,1	16,1	16,1
LE class (Lighting Efficiency Class)	B	B	B	C	C	C	C
GFE (Grease Filtering Efficiency)	88,5	88,5	88,5	91,2	91,2	91,2	91,2
GFE Class (Grease Filtering Efficiency class)	B	B	B	B	B	B	B
Air flow at minimum speed (m³/h)	385	385	385	340	340	340	340
Air flow at maximum speed (m³/h)	645	645	645	600	600	600	600
Air flow at intensive speed (TURBO) (m³/h)	-	-	-	820	820	820	820
Sound Power Level at minimum speed (dB)	56	56	56	50	50	50	50
Sound Power Level at maximum speed (dB)	70	70	70	65	65	65	65
Sound Power Level at intensive speed (TURBO) (dB)	-	-	-	67	67	67	67
Po (Power Consumption in off mode) (W)	0	0	0	0,3	0,3	0,3	0,3
Ps (Power Consumption in standby) (W)	0	0	0	0	0	0	0
Integration directive EU 66/2014							
f (Time Increase Factor)	1,4	1,4	1,4	0,9	0,9	0,9	0,9
EEL (Energy Efficiency Index)	82,4	82,4	82,4	54,4	54,4	54,4	54,4
QBEP (Flow Rate at Best Efficiency Point) (m³/h)	375,3	375,3	375,3	429,4	429,4	429,4	429,4
PBEP (Static Pressure Difference at Best Efficiency Point) (Pa)	295	295	295	405	405	405	405
WBEP (Electric Power Input at Best Efficiency Point) (W)	188,8	188,8	188,8	159,8	159,8	159,8	159,8
WL (Nominal Power Consumption of Lighting system) (W)	6	6	6	7	7	7	7
EMIDDLE (Average Illumination of Lighting system on Cooking surface) (lux)	128,3	128,3	128,3	113	113	113	113
External Dimensions							
Width (mm)	447	698	598	792	492	792	492
Depth (mm)	310-350	310-350	310-350	277	277	277	277
Total max height (mm)	280	280	280	300	300	300	300
Total min height (mm)	280	280	280	300	300	300	300
Outlet Diameter (mm)	150	150	150	150	150	150	150
Characteristics							
Motor	M3R	M3R	M3R	BT3	BT3	BT3	BT3
Extraction Levels	5+1	5+1	5+1	5+1	5+1	5+1	5+1
Motor Maximum Power Consumption	270	270	270	280	280	280	280
Maximum Pressure	430	430	430	450	450	450	450
Intensive Speed (TURBO) Pressure	-	-	-	470	470	470	470
Control Type	Mechanic	Mechanic	Mechanic	TC4i	TC4i	TC4i	TC4i
Automatic shut-down timer	-	-	-	√	√	√	√
Electronic Filter Saturation Indicator	-	-	-	√	√	√	√
Filter Type	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic
Anti-grease Filter Number	2	2	2	1	1	1	1
Inner Shield	-	-	-	-	-	-	-
Lighting							
Light Type	CSLED	CSLED	CSLED	EcoLed	EcoLed	EcoLed	EcoLed
Adjustable Intensity Lighting	-	-	-	-	-	-	-
N° of Lamps	2	2	2	2	2	2	2
Installation							
Minimum height distance to a electric worktop hob (mm)	550	550	550	550	550	550	550
Minimum height distance to a gas worktop hob (mm)	650	650	650	650	650	650	650
Installation with Outlet tube to the exterior / Recirculating	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH
Easy Installation System	√	√	√	√	√	√	√
Electric Connection							
Total Rush Power (W)	276	276	276	287	287	287	287
Rated Voltage (V)	220-240	220-240	220-240	220-240	220-240	220-240	220-240
Network Frequency (Hz)	50	50	50	50	50	50	50
Electrical Insulation Class	CLASE I	CLASE I	CLASE I	CLASS II	CLASS II	CLASS II	CLASS II
Plug	-	-	-	EU - 2 pins	EU - 2 pins	EU - 2 pins	EU - 2 pins
Accessories							
Upper Decorative tube Extension	02861300	02861300	02861300	02861300	02861300	02861300	02861300
White Decorative Tube	-	-	-	-	-	-	-
Black Decorative Tube	02861401	02861401	02861401	02861401	02861401	02861401	02861401
Island Tube Enhancer	-	-	-	-	-	-	-
Check Valve	02832001	02832001	02832001	02832004	02832004	02832004	02832004
MAX PRO Metal Filter	-	-	-	-	-	-	-
Metal Filter	02800207	02801002	02800211	02800903	02800904	02800903	02800904
DUAL Filter (metal + active charcoal)	02800215	02801003	02800216	02800922 / 02800927	02800922 / 02800927	02800922 / 02800927	02800922 / 02800927
Active Charcoal Filter	02859398	02859398	02859398	2859398	2859398	2859398	2859398
Noiseless Flexible Duct	02893002	02893002	02893002	02893002	02893002	02893002	02893002

02031308	02030308	02031304	02030304	02031302	02030305	02031301	02030309	02030408	02030005	02031300	02030300
8422248103589	8422248103572	8422248198486	8422248198479	8422248190411	8422248077842	8422248190381	8422248190374	8422248190404	8422248190398	8422248108461	8422248108454
GCX 83 SD	GCX 53 SD	GPL 75 X	GPL 52 X	GL 75 X	GL 45 X	GT-PLUS 75 X /M	GT-PLUS 45 X /M	GT-PLUS 45 BK /M	GT-PLUS 45 WH /M	GCB 73 X	GCB 55 X
Canopy	Canopy	Canopy	Canopy	Canopy	Canopy	Canopy	Canopy	Canopy	Canopy	Canopy	Canopy
56,1	56,1	60	59	58,3	58,3	88,6	88,6	88,6	88,6	54	54
A	A	B	B	A	A	C	C	C	C	C	C
30,2	30,2	26,1	25,9	30,2	30,2	16,3	16,3	16,3	16,3	10,1	10,1
A	A	B	B	A	A	D	D	D	D	E	E
26	26	29,8	32,5	24,3	24,3	28,3	33,7	33,7	33,7	29,5	30,4
B	B	A	A	B	B	A	A	A	A	A	A
91,2	91,2	66,7	66,7	91,2	91,2	91,2	91,2	91,2	91,2	58,3	58,3
B	B	D	D	B	B	B	B	B	B	E	E
340	340	252,4	249,6	340	340	300	300	300	300	283,1	282
600	600	591,8	589,7	600	600	645	645	645	645	372,2	371,1
750	750	-	-	820	820	-	-	-	-	-	-
50	50	50,2	48,9	50	50	50	50	50	50	60	59
65	65	67,5	67,6	65	65	65	65	65	65	66,4	65,9
67	67	-	-	67	67	-	-	-	-	-	-
0,3	0,3	0	0	0,3	0,3	0	0	0	0	0	0
0	0	0,48	0,49	0	0	0	0	0	0	0	0
0,9	0,9	1,06	1,07	0,9	0,9	1,4	1,4	1,4	1,4	1,64	1,64
54,4	54,4	61,1	60,7	54,4	54,4	81,1	81,1	81,1	81,1	83,5	83,6
429,4	429,4	332,5	327,4	429,4	429,4	358,1	358,1	358,1	358,1	198,1	197,5
405	405	410	411	405	405	270	270	270	270	160	161
159,8	159,8	145,3	144,3	159,8	159,8	164,9	164,9	164,9	164,9	86,9	87,2
7	7	4,8	3,2	7	7	6	6	6	6	3	3
170	170	143,2	104	170	170	170	202	202	202	88,4	91,2
830	530	700	520	792	492	792	492	492	492	730	550
280	253	280	280	277	277	277	277	277	277	310	310
316	316	256	256	315	280	312	282	282	282	187	187
316	316	256	256	315	280	312	282	282	282	187	187
150	150	150	150	150	150	150	150	150	150	150	150
BT3	BT3	186W	186W	BT3	BT3	BT2	BT2	BT2	BT2	120W	120W
5+1	5+1	5+1	5+1	5+1	5+1	5+1	5+1	5+1	5+1	5+1	5+1
280	280	186	186	280	280	200	200	200	200	120	120
450	450	484	484	450	450	400	400	400	400	226	226
470	470	-	-	470	470	-	-	-	-	-	-
TC4i	TC4i	Touch Control	Touch Control	TC4i	TC4i	Mechanic	Mechanic	Mechanic	Mechanic	Mechanic	Mechanic
√	√	√	√	√	√	-	-	-	-	-	-
√	√	√	√	√	√	-	-	-	-	-	-
Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic
2	2	2	2	3	2	2	2	2	2	2	2
-	-	-	-	-	-	-	-	-	-	-	-
SSLED	SSLED	Strip led	Strip led	EcoLed	EcoLed	CSLED	CSLED	CSLED	CSLED	CSLED	CSLED
√	√	-	-	√	√	-	-	-	-	-	-
1	1	1	1	2	2	2	2	2	2	1	1
550	550	550	550	550	550	550	550	550	550	550	550
650	650	650	650	650	650	650	650	650	650	650	650
BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH
√	√	√	√	√	√	√	√	√	√	√	√
285	285	189,5	189,5	287	287	206	206	206	206	123	123
220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240
50	50	50	50	50	50	50	50	50	50	50	50
CLASS II	CLASS II	CLASS I	CLASS I	CLASS II	CLASS II	CLASS II	CLASS II	CLASS II	CLASS II	CLASS I	CLASS I
EU - 2 pins	EU - 2 pins	-	-	EU - 2 pins	EU - 2 pins	EU - 2 pins	EU - 2 pins	EU - 2 pins	EU - 2 pins	-	-
02861300	02861300	02861300	02861300	02861300	02861300	02861300	02861300	02861300	02861300	02861300	02861300
-	-	-	-	-	-	-	-	-	-	-	-
02861401	02861401	02861401	02861401	02861401	02861401	02861401	02861401	02861401	02861401	02861401	02861401
-	-	-	-	-	-	-	-	-	-	-	-
02832004	02832004	-	-	02832004	02832004	02832004	02832004	02832004	02832004	-	-
-	-	-	-	-	-	-	-	-	-	-	-
65300315	65300310	02811015	02811016	02811000	02811000	02811000*	02811000*	02811000*	02811000*	02800988	02800987
02800922 / 02800927	02800922 / 02800927	02800922 / 02800927	02800922 / 02800927	02800922 / 02800927	02800922 / 02800927	02800922 / 02800927	02800922 / 02800927	02800922 / 02800927	02800922 / 02800927	02800922 / 02800927	02800922 / 02800927
2859398	2859398	2859398	2859398	2859398	2859398	2859398	2859398	2859398	2859398	2859398	2859398
02893002	02893002	-	-	02893002	02893002	02893002	02893002	02893002	02893002	02893002	02893002

Code	02130402	02039305	02039005	02039306	02039007	02010601	02010101
EAN	8422248082716	8422248087377	8422248087384	8422248357135	8422248357142	8422248112741	8422248112758
Model	G 50 LUX X	G-45 X	G-45 WH	GK 4500 X	GK 4500 WH	TFH 6830 X	TFH 6830 GWH
Type	Canopy	Canopy	Canopy	Canopy	Canopy	Telescopic	Telescopic
Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564							
AEC (Annual Energy consumption) (kWh/annum)	49	48,6	48,6	29,7	29,7	16,6	16,6
EEL class (Energy Efficiency Class)	C	C	C	B	B	A+++	A+++
FDE (Fluid Dynamic Efficiency)	9,8	11,7	11,7	19,3	19,3	41,11	41,11
FDE class (Fluid Dynamic Efficiency Class)	E	E	E	C	C	A	A
LE (Lighting Efficiency) (lux/W)	36	8,4	8,4	15,5	15,5	22,6	22,6
LE class (Lighting Efficiency Class)	A	E	E	D	D	B	B
GFE (Grease Filtering Efficiency)	74,6	63	63	63	63	66,4	66,4
GFE Class (Grease Filtering Efficiency class)	D	E	E	E	E	D	D
Air flow at minimum speed (m ³ /h)	210	162	162	190	190	291	291
Air flow at maximum speed (m ³ /h)	400	335	335	360	360	600	600
Air flow at intensive speed (TURBO) (m ³ /h)	-	-	-	-	-	795	795
Sound Power Level at minimum speed (dB)	50	57	57	56	56	46	46
Sound Power Level at maximum speed (dB)	62	62	62	67	67	64	64
Sound Power Level at intensive speed (TURBO) (dB)	-	-	-	-	-	69	69
Po (Power Consumption in off mode) (W)	0	0	0	0	0	0,3	0,3
Ps (Power Consumption in standby) (W)	0	0	0	0	0	-	-
Integration directive EU 66/2014							
f (Time Increase Factor)	1,6	1,6	1,6	1,3	1,3	0,5	0,5
EEL (Energy Efficiency Index)	82,6	81,7	81,7	60,7	60,7	27,5	27,5
QBEP (Flow Rate at Best Efficiency Point) (m ³ /h)	208,6	185,2	185,2	199,7	199,7	332,82	332,82
PBEP (Static Pressure Difference at Best Efficiency Point) (Pa)	123	159	159	202	202	251,41	251,41
WBEP (Electric Power Input at Best Efficiency Point) (W)	72,9	69,4	69,4	58	58	79,03	79,03
WL (Nominal Power Consumption of Lighting system) (W)	7	11	11	3	3	3	3
EMIDDLE (Average Illumination of Lighting system on Cooking surface) (lux)	252	93	93	46,5	46,5	79	79
External Dimensions							
Width (mm)	530	510	510	510	510	600	600
Depth (mm)	310	302	302	302	302	300-350	300-350
Total max height(mm)	172	170	170	170	170	221,5	221,5
Total min height(mm)	172	170	170	170	170	221,5	221,5
Outlet Diameter (mm)	150	150	150	150	150	150	150
Characteristics							
Motor	K7 PLUS	TF 2003	TF 2003	K11	K11	BT4DC	BT4DC
Extraction Levels	5+1	5+1	5+1	2	2	5+1	5+1
Motor Maximum Power Consumption	95	100	100	90	90	135	135
Maximum Pressure	200	194	194	252	252	357	357
Intensive Speed (TURBO) Pressure	-	-	-	-	-	365	365
Control Type	Mechanic	Slider	Slider	Slider	Slider	TCD6i	TCD6i
Automatic shut-down timer	-	-	-	-	-	√	√
Electronic Filter Saturation Indicator	-	-	-	-	-	√	√
Filter Type	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic
Anti-grease Filter Number	1	1	1	1	1	2	2
Inner Shield	-	-	-	-	-	-	-
Lighting							
Light Type	EcoLed	LED E-14	LED E-14	E14 3W	E14 3W	SS Led	SS Led
Adjustable Intensity Lighting	-	-	-	-	-	√	√
N° of Lamps	2	2	2	1	1	1	1
Installation							
Minimum height distance to a electric worktop hob (mm)	550	550	550	550	550	550	550
Minimum height distance to a gas worktop hob (mm)	650	650	650	650	650	650	650
Installation with Outlet tube to the exterior / Recirculating	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH
Easy Installation System	√	√	√	√	√	√	√
Electric Connection							
Total Rush Power (W)	102	111	111	93	93	138	138
Rated Voltage (V)	220-240	220-240	220-240	220-240	220-240	220-240	220-240
Network Frequency (Hz)	50	50	50	50	50	50-60	50-60
Electrical Insulation Class	CLASS II	CLASS I	CLASS I	CLASS II	CLASS II	CLASS I	CLASS I
Plug	EU - 2 pins	-	-	-	-	-	-
Accessories							
Upper Decorative tube Extension	02861300	02861300	02861300	-	-	02861300	02861300
White Decorative Tube	-	-	-	-	-	-	-
Black Decorative Tube	02861401	02861401	02861401	-	-	02861401	02861401
Island Tube Enhancer	-	-	-	-	-	-	-
Check Valve	02832004	02849003	02849003	02849003	02849003	02832004	02832004
MAX PRO Metal Filter	-	-	-	-	-	-	-
Metal Filter	02894010	02808000*	02808000*	02808000*	02808000*	02825279	02825279
DUAL Filter (metal + active charcoal)	02800922 / 02800927	02800922 / 02800927	02800922 / 02800927	-	-	02800922 / 02800927	02800922 / 02800927
Active Charcoal Filter	2859398	2859398	2859398	02859489	02859489	2859398	2859398
Noiseless Flexible Duct	02893002	-	-	-	-	02893002	02893002

02010404	02010300	02010301	02010302	02010609	02010409	02010009	02017203	02017202	02094306	02089306
8422248357364	8422248082365	8422248082396	8422248082402	8422248343626	8422248343602	8422248343619	8422248062015	8422248062008	8422248110310	8422248110327
TFH 6830 GBK	TFH 6630 X	TFH 6630 WH	TFH 6630 BK	TFH 6430 X	TFH 6430 GWH	TFH 6430 GBK	TF-2003 600 GBK / B	TF-2003 600 GWH / A	EXTENDER 900	EXTENDER 700
Telescopic	Telescopic	Telescopic	Telescopic	Telescopic	Telescopic	Telescopic	Telescopic	Telescopic	Telescopic	Telescopic
16,6	19,3	19,3	19,3	13,4	13,4	13,4	44,5	44,5	44,5	44,5
A+++	A+	A+	A+	A+	A+	A+	C	C	C	C
41,11	34,4	34,4	34,4	24,9	24,9	24,9	11,9	11,9	11,9	11,9
A	A	A	A	B	B	B	E	E	E	E
22,6	21,9	21,9	21,9	18	18	18	36	36	36	36
B	B	B	B	C	C	C	A	A	A	A
66,4	66,4	66,4	66,4	79,9	79,9	79,9	68	68	68	68
D	D	D	D	C	C	C	D	D	D	D
291	210	210	210	164,1	164,1	164,1	150	150	150	150
600	410	410	410	320,4	320,4	320,4	390	390	390	390
795	605	605	605	391,5	391,5	391,5	-	-	-	-
46	47	47	47	44	44	44	45	45	45	45
64	64	64	64	62	62	62	57	57	57	57
69	70	70	70	65	65	65	-	-	-	-
0,3	0,4	0,4	0,4	0,45	0,45	0,45	0	0	0	0
-	-	-	-	-	-	-	0	0	0	0
0,5	0,8	0,8	0,8	1,1	1,1	1,1	1,6	1,6	1,6	1,6
27,5	39,2	39,2	39,2	41,5	41,5	41,5	78,2	78,2	78,2	78,2
332,82	275,2	275,2	275,2	164,6	164,6	164,6	198,2	198,2	198,2	198,2
251,41	263	263	263	152	152	152	148	148	148	148
79,03	58,6	58,6	58,6	27,9	27,9	27,9	68,6	68,6	68,6	68,6
3	3	3	3	3	3	3	7	7	7	7
79	67	67	67	54	54	54	252	252	252	252
600	600	600	600	600	600	600	600	600	900	700
300-350	300-350	300-350	300-350	300-350	300-350	300-350	280	280	300	300
221,5	221,5	221,5	221,5	181,5	181,5	181,5	180	180	180	180
221,5	221,5	221,5	221,5	181,5	181,5	181,5	180	180	180	180
150	150	150	150	150	150	150	150	150	150	150
BT4DC	T1DC	T1DC	T1DC	EY400	EY400	EY400	TF 2003	TF 2003	TF 2003	TF 2003
5*1	5*1	5*1	5*1	5*1	5*1	5*1	5*1	5*1	5*1	5*1
135	90	90	90	55	55	55	100	100	100	100
357	250	250	250	243	243	243	194	194	194	194
365	315	315		362	362	362	-	-	-	-
TCD6i	TCD6i	TCD6i	TCD6i	TC TFH4i	TC TFH4i	TC TFH4i	Rocker Switch	Rocker Switch	Rocker Switch	Rocker Switch
√	√	√	√	√	√	√	-	-	-	-
√	√	√	√	√	√	√	-	-	-	-
Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic
2	2	2	2	2	2	2	2	2	2	2
-	-	-	-	-	-	-	√	√	√	√
SS Led	SS Led	SS Led	SS Led	SS Led	SS Led	SS Led	Ecoled	Ecoled	Ecoled	Ecoled
√	√	√	√	√	√	√	-	-	-	-
1	1	1	1	1	1	1	2	2	2	2
550	550	550	550	550	550	550	550	550	550	550
650	650	650	650	650	650	650	650	650	650	650
BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH
√	√	√	√	√	√	√	√	√	√	√
138	93	93	93				107	107	107	107
220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240
50-60	50	50	50	50	50	50	50	50	50	50
CLASS I	CLASS I	CLASS I	CLASS I	CLASS I	CLASS I	CLASS I	CLASS I	CLASS I	CLASS I	CLASS I
-	-	-	-	-	-	-	-	-	-	-
02861300	02861300	02861300	02861300	02861300	02861300	02861300	02861300	02861300	02861300	02861300
-	-	-	-	-	-	-	-	-	-	-
02861401	02861401	02861401	02861401	02861401	02861401	02861401	02861401	02861401	02861401	02861401
-	-	-	-	-	-	-	-	-	-	-
02832004	02832004	02832004	02832004	02832004	02832004	02832004	02849003	02849003	02849003	02849003
-	-	-	-	-	-	-	-	-	-	-
02825279	02825279	02825279	02825279	02825279	02825279	02825279	02825272*	02825272*	02825278	02825277
02800922 / 02800927	02800922 / 02800927	02800922 / 02800927	02800922 / 02800927	02800922 / 02800927	02800922 / 02800927	02800922 / 02800927	02800922 / 02800927	02800922 / 02800927	02800922 / 02800927	02800922 / 02800927
2859398	2859398	2859398	2859398	2859398	2859398	2859398	2859398	2859398	2859398	2859398
02893002	02893002	02893002	02893002	02893002	02893002	02893002	-	-	-	-

Code	02017606	02094305	02089305	02017305	02034310	02034501	02034606
EAN	8422248110334	8422248061964	8422248061971	8422248061988	8422248082129	8422248082136	8422248101998
Model	EXTENDER 600	TF-2003 DURALUM 900	TF-2003 DURALUM 700	TF-2003 DURALUM 600	TF-5260 X	TF-5260 WH	TFB-5160 X
Type	Telescopic	Telescopic	Telescopic	Telescopic	Telescopic	Telescopic	Telescopic
Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564							
AEC (Annual Energy consumption) (kWh/annum)	44,5	46,3	44,5	44,5	78,3	78,3	36,5
EEL class (Energy Efficiency Class)	C	C	C	C	D	D	C
FDE (Fluid Dynamic Efficiency)	11,9	10,1	11,9	11,9	9	9	8,86
FDE class (Fluid Dynamic Efficiency Class)	E	E	E	E	E	E	E
LE (Lighting Efficiency) (lux/W)	36	36	36	36	9,3	9,3	43,9
LE class (Lighting Efficiency Class)	A	A	A	A	E	E	A
GFE (Grease Filtering Efficiency)	68	68	68	68	66,5	66,5	60,6
GFE Class (Grease Filtering Efficiency class)	D	D	D	D	D	D	E
Air flow at minimum speed (m ³ /h)	150	150	150	150	174,8	174,8	158,4
Air flow at maximum speed (m ³ /h)	390	390	390	390	325,1	325,1	297,2
Air flow at intensive speed (TURBO) (m ³ /h)	-	-	-	-	-	-	-
Sound Power Level at minimum speed (dB)	45	45	45	45	54	54	47,8
Sound Power Level at maximum speed (dB)	57	57	57	57	68	68	61,1
Sound Power Level at intensive speed (TURBO) (dB)	-	-	-	-	-	-	-
Po (Power Consumption in off mode) (W)	0	0	0	0	0	0	0
Ps (Power Consumption in standby) (W)	0	0	0	0	0	0	-
Integration directive EU 66/2014							
f (Time Increase Factor)	1,6	1,6	1,6	1,6	1,7	1,7	1,68
EEL (Energy Efficiency Index)	78,2	81,1	78,2	78,2	93,5	93,5	76,34
QBEP (Flow Rate at Best Efficiency Point) (m ³ /h)	198,2	201,1	198,2	198,2	198	198	158,4
PBEP (Static Pressure Difference at Best Efficiency Point) (Pa)	148	125	148	148	185	185	115,03
WBEP (Electric Power Input at Best Efficiency Point) (W)	68,6	69	68,6	68,6	113,3	113,3	57,11
WL (Nominal Power Consumption of Lighting system) (W)	7	7	7	7	11	11	2
EMIDDLE (Average Illumination of Lighting system on Cooking surface) (lux)	252	252	252	252	102	102	87,8
External Dimensions							
Width (mm)	600	900	700	600	600	600	595
Depth (mm)	300	280	280	280	280	280	297
Total max height(mm)	180	180	180	180	175	175	200
Total min height(mm)	180	180	180	180	175	175	225
Outlet Diameter (mm)	150	150	150	150	150	150	150
Characteristics							
Motor	TF 2003	TF 2003	TF 2003	TF 2003	2 x LIN	2 x LIN	TT300
Extraction Levels	5+1	5+1	5+1	5+1	5+1	5+1	5+1
Motor Maximum Power Consumption	100	100	100	100	2 x 65	2 x 65	65
Maximum Pressure	194	194	194	194	301	301	170
Intensive Speed (TURBO) Pressure	-	-	-	-	-	-	-
Control Type	Rocker Switch	Rocker Switch	Rocker Switch	Rocker Switch	Slider	Slider	Rocker Switch
Automatic shut-down timer	-	-	-	-	-	-	-
Electronic Filter Saturation Indicator	-	-	-	-	-	-	-
Filter Type	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic
Anti-grease Filter Number	2	2	2	2	2	2	2
Inner Shield	√	√	√	√	-	-	-
Lighting							
Light Type	Ecoled	Ecoled	Ecoled	Ecoled	LED E-14	LED E-14	CSLED
Adjustable Intensity Lighting	-	-	-	-	-	-	-
N° of Lamps	2	2	2	2	2	2	1
Installation							
Minimum height distance to a electric worktop hob (mm)	550	550	550	550	550	550	550
Minimum height distance to a gas worktop hob (mm)	650	650	650	650	650	650	650
Installation with Outlet tube to the exterior / Recirculating	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH
Easy Installation System	√	√	√	√	√	√	√
Electric Connection							
Total Rush Power (W)	107	107	107	107	141	141	67
Rated Voltage (V)	220-240	220-240	220-240	220-240	220-240	220-240	220-240
Network Frequency (Hz)	50	50	50	50	50	50	50 / 60
Electrical Insulation Class	CLASS I	CLASS I	CLASS I	CLASS I	CLASS II	CLASS II	CLASS I
Plug	-	-	-	-	EU 2 Pins	EU 2 Pins	VDE
Accessories							
Upper Decorative tube Extension	02861300	02861300	02861300	02861300	02861300	02861300	02861300
White Decorative Tube	-	-	-	-	-	-	-
Black Decorative Tube	02861401	02861401	02861401	02861401	02861401	02861401	02861401
Island Tube Enhancer	-	-	-	-	-	-	-
Check Valve	02849003	02849003	02849003	02849003	02849002	02849002	-
MAX PRO Metal Filter	-	-	-	-	-	-	-
Metal Filter	02825276	02825273*	02825274*	02825272*	02825270	02825270	02800981
DUAL Filter (metal + active charcoal)	02800922 / 02800927	02800922 / 02800927	02800922 / 02800927	02800922 / 02800927	02800922 / 02800927	02800922 / 02800927	02800922 / 02800927
Active Charcoal Filter	2859398	2859398	2859398	2859398	2859398	2859398	2859398
Noiseless Flexible Duct	-	-	-	-	-	-	-

02034408	02034107	02097306	02097305	02097002	02033309	02034608	02034504	02034604	02034505	02001301
8422248108096	8422248102001	8422248102018	8422248086264	8422248086271	8422248086059	8422248357203	8422248357210	8422248357234	8422248357227	8422248062039
TFB-5160 BK	TFB-5160 WH	TFB-5150 X	TF-5250 X	TF-5250 WH	TF-5060 X	TFK 6000 X	TFK 6000 WH	TFK 6005 X	TFK 6005 WH	S-BOX X
Telescopic	Telescopic	Telescopic	Telescopic	Telescopic	Telescopic	Telescopic	Telescopic	Telescopic	Telescopic	Standard
36,5	36,5	31,1	78,3	78,3	38,5	32,1	32,1	32,1	32,1	52,5
C	C	C	D	D	C	B	B	B	B	C
8,86	8,86	11,7	9	9	10,4	20,6	20,6	20,6	20,6	11,9
E	E	E	E	E	E	C	C	C	C	E
43,9	43,9	46	9,3	9,3	11,8	35,6	35,6	35,6	35,6	4,9
A	A	A	E	E	E	A	A	A	A	F
60,6	60,6	62,6	66,5	66,5	59,6	70	70	70	70	68
E	E	E	D	D	E	D	D	D	D	D
158,4	158,4	179,6	174,8	174,8	95,8	186	186	186	186	150
297,2	297,2	319,6	325,1	325,1	196,8	360	360	360	360	390
-	-	-	-	-	-	-	-	-	-	-
47,8	47,8	51	54	54	46	54	54	54	54	45
61,1	61,1	62	68	68	62	68	68	68	68	57
-	-	-	-	-	-	-	-	-	-	-
0	0	0	0	0	0	0	0	0	0	0
-	-	-	0	0	0	0	0	0	0	0
1,68	1,68	1,6	1,7	1,7	1,6	1,3	1,3	1,3	1,3	1,6
76,34	76,34	70,2	93,5	93,5	75,8	62,2	62,2	62,2	62,2	83,4
158,4	158,4	173,7	198	198	122,6	203,8	203,8	203,8	203,8	198,2
115,03	115,03	123	185	185	180	229,1	229,1	229,1	229,1	148
57,11	57,11	50,8	113,3	113,3	59,1	63	63	63	63	68,6
2	2	2	11	11	5,5	3	3	3	3	18
87,8	87,8	92	102	102	65	107	107	107	107	89
595	595	495	600	600	600	600	600	600	600	600
297	297	297	280	280	280	280	280	280	280	500
200	200	200	175	175	175	180	180	180	180	142
225	225	225	175	175	175	180	180	180	180	142
150	150	150	150	150	150	150	150	150	150	150
TT300	TT300	TT300	2 x LIN	2 x LIN	1 x LIN	K11	K11	K11	K11	TF 2003
5*1	5*1	5*1	5*1	5*1	5*1	2	2	3	3	5*1
65	65	65	2 x 65	2 x 65	65	95	95	95	95	100
170	170	170	301	301	205	251	251	251	251	194
-	-	-	-	-	-	-	-	-	-	-
Rocker Switch	Rocker Switch	Rocker Switch	Slider	Slider	Slider	Rocker	Rocker	Slider	Slider	Mechanic
-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-
Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic	Metallic
2	2	2	2	2	2	2	2	2	2	2
-	-	√	-	-	-	-	-	-	-	-
CSLED	CSLED	CSLED	LED E-14	LED E-14	LED E-14	CSLED	CSLED	CSLED	CSLED	E-14 9W
-	-	-	-	-	-	-	-	-	-	-
1	1	1	2	2	1	1	1	1	1	2
550	550	550	550	550	550	550	550	550	550	550
650	650	650	650	650	650	650	650	650	650	650
BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH
√	√	√	√	√	√	√	√	√	√	√
67	67	67	141	141	70,5	98	98	98	98	118
220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240
50 / 60	50 / 60	50 / 60	50	50	50	50	50	50	50	50
CLASS I	CLASS I	CLASS I	CLASS II	CLASS II	CLASS II	CLASS II	CLASS II	CLASS II	CLASS II	CLASS I
VDE	VDE	VDE	EU 2 Pins	EU 2 Pins	EU 2 Pins	-	-	-	-	-
02861300	02861300	02861300	02861300	02861300	02861300	-	-	-	-	02861300
-	-	-	-	-	-	-	-	-	-	-
02861401	02861401	02861401	02861401	02861401	02861401	-	-	-	-	02861401
-	-	-	-	-	-	-	-	-	-	-
-	-	-	02849002	02849002	02849002	02849002	02849002	02849002	02849002	02849003
-	-	-	-	-	-	-	-	-	-	-
02800981	02800981	02800977	02825270	02825270	02825270	02825272*	02825272*	02825270	02825270	02800912*
02800922 / 02800927	02800922 / 02800927	02800922 / 02800927	02800922 / 02800927	02800922 / 02800927	02800922 / 02800927	02800922 / 02800927	-	-	-	02800922 / 02800927
2859398	2859398	2859398	2859398	2859398	2859398	02859489	02859489	02859489	02859489	2859398
-	-	-	-	-	-	-	-	-	-	-

Code	02011602	02011117	02015306	02015006	02014302	02011604	02011504
EAN	8422248357180	8422248357197	8422248086103	8422248086110	8422248168946	8422248357241	8422248357258
Model	LFK 6000 X	LFK 6000 WH	F-2050 X	F-2050 WH	F-2290 X	FK SLIM 6000 X	FK SLIM 6000 BK
Type	Standard	Standard	Standard	Standard	Standard	Standard	Standard
Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564							
AEC (Annual Energy consumption) (kWh/annum)	29,6	29,6	44,7	44,7	-	29,6	29,6
EEL class (Energy Efficiency Class)	B	B	C	C	-	B	B
FDE (Fluid Dynamic Efficiency)	11,5	11,5	9,2	9,2	-	11,5	11,5
FDE class (Fluid Dynamic Efficiency Class)	E	E	E	E	-	E	E
LE (Lighting Efficiency) (lux/W)	15,5	15,5	27,3	27,3	-	15,5	15,5
LE class (Lighting Efficiency Class)	D	D	B	B	-	D	D
GFE (Grease Filtering Efficiency)	67,7	67,7	67,7	67,7	-	67,7	67,7
GFE Class (Grease Filtering Efficiency class)	D	D	D	D	-	D	D
Air flow at minimum speed (m³/h)	108	108	107,5	107,5	-	108	108
Air flow at maximum speed (m³/h)	162	162	193,5	193,5	-	162	162
Air flow at intensive speed (TURBO) (m³/h)	-	-	-	-	-	-	-
Sound Power Level at minimum speed (dB)	49	49	56	56	-	49	49
Sound Power Level at maximum speed (dB)	58	58	68	68	-	58	58
Sound Power Level at intensive speed (TURBO) (dB)	-	-	-	-	-	-	-
Po (Power Consumption in off mode) (W)	0	0	0	0	-	0	0
Ps (Power Consumption in standby) (W)	0	0	0	0	-	0	0
Integration directive EU 66/2014							
f (Time Increase Factor)	1,6	1,6	1,7	1,7	-	1,6	1,6
EEL (Energy Efficiency Index)	69,2	69,2	82,2	82,2	-	69,2	69,2
QBEP (Flow Rate at Best Efficiency Point) (m³/h)	91,5	91,5	105,2	105,2	-	91,5	91,5
PBEP (Static Pressure Difference at Best Efficiency Point) (Pa)	211,9	211,9	209	209	-	211,9	211,9
WBEP (Electric Power Input at Best Efficiency Point) (W)	47	47	201	201	-	47	47
WL (Nominal Power Consumption of Lighting system) (W)	3	3	5,5	5,5	-	3	3
EMIDDLE (Average Illumination of Lighting system on Cooking surface) (lux)	46,5	46,5	150	150	-	46,5	46,5
External Dimensions							
Width (mm)	600	600	600	600	900	600	600
Depth (mm)	425	425	470	470	470	470	470
Total max height(mm)	85	85	112	112	150	112	112
Total min height(mm)	85	85	112	112	150	112	112
Outlet Diameter (mm)	150	150	150	150	150	150	150
Characteristics							
Motor	L1B	L1B	L1N	L1N	TF	L1B	L1B
Extraction Levels	2	2	5+1	5+1	5+1	3	3
Motor Maximum Power Consumption	55	55	60	60	2 x 125	55	55
Maximum Pressure	318	318	325	325	179	318	318
Intensive Speed (TURBO) Pressure	-	-	-	-	-	-	-
Control Type	Rocker	Rocker	Mechanic	Mechanic	Slider	Mechanic	Mechanic
Automatic shut-down timer	-	-	-	-	-	-	-
Electronic Filter Saturation Indicator	-	-	-	-	-	-	-
Filter Type	Acrylic	Acrylic	Aluminium Mesh	Aluminium Mesh	Aluminium Mesh	Aluminium Mesh	Aluminium Mesh
Anti-grease Filter Number	1	1	1	1	1	1	1
Inner Shield	-	-	-	-	-	-	-
Lighting							
Light Type	E14	E14	LED E-14	LED E-14	Halogen E-14	E14	E14
Adjustable Intensity Lighting	-	-	-	-	-	-	-
Nº of Lamps	1	1	1	1	2	1	1
Installation							
Minimum height distance to a electric worktop hob (mm)	550	550	550	550	550	550	550
Minimum height distance to a gas worktop hob (mm)	650	650	650	650	650	650	650
Installation with Outlet tube to the exterior / Recirculating	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH
Easy Installation System	√	√	√	√	√	√	√
Electric Connection							
Total Rush Power (W)	58	58	65,5	65,5	306	58	58
Rated Voltage (V)	220-240	220-240	220-240	220-240	220-240	220-240	220-240
Network Frequency (Hz)	50	50	50	50	50	50	50
Electrical Insulation Class	CLASS I	CLASS I	CLASS I	CLASS I	CLASS II	CLASS I	CLASS I
Plug	-	-	-	-	EU 2 Pins	-	-
Accessories							
Upper Decorative tube Extension	-	-	02861300	02861300	02861300	-	-
White Decorative Tube	-	-	-	-	-	-	-
Black Decorative Tube	-	-	02861401	02861401	02861401	-	-
Island Tube Enhancer	-	-	-	-	-	-	-
Check Valve	02849002	02849002	02849002	02849002	02849002	02849002	02849002
MAX PRO Metal Filter	-	-	-	-	-	-	-
Metal Filter	02833170	02833170	02833162	02833162	02833162	02833162	02833162
DUAL Filter (metal + active charcoal)	-	-	02800922 / 02800927	02800922 / 02800927	02800922 / 02800927	-	-
Active Charcoal Filter	02846764	02846764	2859398	2859398	2859398	02846763	02846763
Noiseless Flexible Duct	-	-	-	-	-	-	-

02011204	00117000	00117100	00117400	00116110	00116002	00116400	00114102	00111002
8422248357265	8422248100816	8422248100823	8422248010832	8422248006316	8422248100601	8422248357371	8422248100403	8422248100830
FK SLIM 6000 WH	ASP.CENTRIFUGO, PROFESSIONAL-750	ASP.CENTRIFUGO PROFESSIONAL 750 L	ASP.CENTRIFUGO, PROFESSIONAL 500 (GW)	ASP.CENTRIFUGO, GS-600 PLUS 2 VEL.	ASP.CENTRIFUGO, GS-600	ASP.CENTRIFUGO, GS-600 BK	ASP.CENTRIFUGO, GS-400 M	ASP.CENTRIFUGO, GS-400 P
Standard	Kitchen Extractor	Kitchen Extractor	Kitchen Extractor	Kitchen Extractor	Kitchen Extractor	Kitchen Extractor	Kitchen Extractor	Kitchen Extractor
29,6	54	155,9	69,3	54,8	51,7	51,7	29,2	30,3
B	C	E	D	C	C	C	B	B
11,5	9,5	5,1	5,1	9,3	12,5	12,5	10,7	10,5
E	E	F	F	E	E	E	E	E
15,5	-	1,5	-	-	-	-	-	-
D	-	G	-	-	-	-	-	-
67,7	53,7	53,7	51,9	51,9	-	-	-	-
D	F	F	F	F	-	-	-	-
108	-	-	-	420	-	-	-	-
162	600	600	450	600	480	480	290	290
-	-	-	-	-	-	-	-	-
49	-	-	-	45	-	-	-	-
58	49	49	57	52	50	50	52	52
-	-	-	-	-	-	-	-	-
0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0
1,6	1,7	1,8	1,8	1,7	1,6	1,6	1,6	1,6
69,2	86	109,9	95,2	84,5	78,9	78,9	68,7	69,7
91,5	287,3	287,3	134,6	285,9	311,7	311,7	163,2	174,2
211,9	106	106	142	105	131,6	131,6	117	110,6
47	89,1	169,1	104,6	90,1	91,4	91,4	49,6	51,1
3	-	56	-	-	-	-	-	-
46,5	-	82	-	-	-	-	-	-
600	356	356	260	355	375	375	250	240
470	235	235	173	134	136	136	125	120
112	-	-	-	-	-	-	-	-
112	650	650	650	650	650	650	650	650
150	120	120	100	120	125	125	110	110
L1B	Inducción	Inducción	Inducción	Inducción	Inducción	Inducción	Inducción	Inducción
3	1	1	1	2	1	1	1	1
55	105W	105W	125W	105W	105W	105W	60W	60W
318	190	190	235	205	200	200	210	225
-	-	-	-	-	-	-	-	-
Mechanic	-	-	-	Conmutador	-	-	-	-
-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-
Aluminium Mesh	Metálico	Metálico	Metálico	Metálico	-	-	-	-
1	1	1	1	1	-	-	-	-
-	-	-	-	-	-	-	-	-
E14	-	E-14 x 28W	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-
1	-	2	-	-	-	-	-	-
550	65	65	65	65	65	65	65	65
650	65	65	65	65	65	65	65	65
BOTH	EXTERIOR	EXTERIOR	EXTERIOR	EXTERIOR	EXTERIOR	EXTERIOR	EXTERIOR	EXTERIOR
√	√	√	√	√	√	√	√	√
58	105	161	125	105	105	105	60	60
220-240	230	230	230	230	230	230	230	230
50	50	50	50	50	50	50	50	50
CLASS I	CLASE I	CLASE I	CLASE II	CLASE I	CLASE I	CLASE I	CLASE I	CLASE I
-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-
02849002	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-
02833162	01140700*	01140700*	01140801*	01100000*	-	-	-	-
-	-	-	01140800	-	-	-	-	-
02846763	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-

Code	07047400	07002411	07002412	07001006	07001509	07001010	07001405
EAN	8422248080637	8422248094009	8422248094016	8422248103350	8422248347846	8422248347679	8422248347655
Model	MT 9011 PRO BK	MT 8012 BK	MT 8012 WH	PR 6011 XGBK	MDS 8008 X AIR FRYER	MDS 8008 WH	MDS 8008 BK
Type	Multifunction Turbo	Multifunction Turbo	Multifunction Turbo	Multifunción PYRO	Multifunction Turbo	Multifunction Turbo	Multifunction Turbo
Product fiche according to EU 65/2014 y EU 66/2014							
Energy efficiency index (IEE)	86,6	86,6	86,6	94	117	117	117
Energy efficiency Class	A	A	A	A	A	A	A
Energy consumption in conventional mode [kWh/cycle]	0,71	0,71	0,71	0,99	0,85	0,85	0,85
Energy consumption in fan-forced mode [kWh/cycle]	0,81	0,81	0,81	0,79	0,84	0,84	0,84
Number of cavities	1	1	1	1	1	1	1
Heat source	Electricity	Electricity	Electricity	Electricity	Electricity	Electricity	Electricity
Mass of the appliance [Kg]	39,5	39,5	39,5	39	30,9	30,8	30,4
Cavity volume (L)	72	72	72	70	80	80	80
Dimensions							
Width [mm]	595	595	595	595	595	595	595
Height [mm]	595	595	595	595	595	595	595
Depth [mm]	568	568	568	575	543	543	543
Cavity width [mm]	346,5	346,5	346,5	487	477	477	477
Cavity height [mm]	457	457	457	350	394	394	394
Cavity depth [mm]	410	410	410	420	425	425	425
Characteristics							
Finishing	Black glass	Black glass	White glass	Stainless steel and black glass	Stainless steel and black glass	White glass	Black glass
Soft Door closing	Yes	Yes	Yes	No	No	No	No
Tray levels	5	5	5	5	6	6	6
Convection Fan	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Number of light bulbs	1	1	1	1	1	1	1
Controls							
Oven control	Electronic	Electronic	Electronic	Electronic	Electronic - Mechanic	Electronic - Mechanic	Electronic - Mechanic
Control type	Tactile digital screen 5"	Touch control	Touch control	Touch with push-pull knobs	Touch with push-pull knobs	Touch with push-pull knobs	Touch with push-pull knobs
Screen Technology	TFT	LCD	LCD	White LCD	LED	LED	LED
Cooking programmer start/stop	Yes	Yes	Yes	Yes	-	-	-
Cooking programmer stop	-	-	-	Yes	-	-	-
Minute minder	-	-	-	-	Yes	Yes	Yes
Working pilot light	Yes	Yes	Yes	-	Yes	Yes	Yes
Thermostat pilot light	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Min. temperature [°C]	50	50	50	50	40	40	40
Max. Temperature [°C]	250	250	250	250	240	240	240
Cleaning							
Enamel	Non-stick black	Non-stick black	Non-stick black	black pyrolytic	Non-stick black	Non-stick black	Non-stick black
Cavity type	Flat	Flat	Flat	Flat	Flat	Flat	Flat
Inner glass	Removable	Removable	Removable	Removable	Removable	Removable	Removable
Pyrolytic Cleaning	-	-	-	Yes	No	No	No
AquaSmart Cleaning	Automatic	Automatic	Automatic	Manual	Yes	Yes	Yes
Functions							
Functions	14	12	12	11	8	8	8
Rapid heating	Yes	Yes	Yes	No	No	No	No
Inner light	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Safety							
Safety lock	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Number of door glasses	3	3	3	4	2	2	2
Cooling fan	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Security Thermostat	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Electrical connection							
Grill power [W]	2250	2250	2250	2000	1000+2000	1000+2000	1000+2000
Bottom heating element power [W]	1100	1100	1100	1100	900	900	900
Back heating element power [W]	2000	2000	2000	2000	2300	2300	2300
Total rated Power [W]	2380	2380	2380	3200	2300	2300	2300
Nominal voltage [V] / Mains frequency [Hz]	230-240 / 50-60	230-240 / 50-60	230-240 / 50-60	220-240 / 50/60	220-240 / 50/60	220-240 / 50/60	220-240 / 50/60
Light power [W]	25	25	25	25	15	15	15
Power cord length [m]	1	1	1	1	1,5	1,5	1,5
Plug	No	No	No	Yes	No	No	No
Accessories							
Air fry tray	-	-	-	-	1	-	-
Side racks	1	1	1	1	1	1	1
Grill	1	1	1	1	1	1	1
Shallow tray	1	1	1	1	1	1	1
Deep tray	1	1	1	-	1	1	1
Sliding rails	1	1	1	1	PSC-50%	PSC-50%	PSC-50%
Turnspit	-	-	-	-	-	-	-
Pizza Stone (optional)	Yes	Yes	Yes	-	No	No	No
Gas connection hose	-	-	-	-	-	-	-

07001508	07034101	07034508	07034605	07044609	07033303	07007303	07044350	07044105	07044614	07044613
8422248347662	8422248347709	8422248347693	8422248347686	8422248347716	8422248076029	8422248075886	8422248347297	8422248347730	8422248347839	8422248347754
MDS 8008 X	MDS 8007 WH	MDS 8007 BK	MDS 8007 X	MES 8007 X	MD6106X	ME6206X	SES 7104 X /C	SES 6204 WH	SES 6004 BK	SES 6004 WH
Multifunction Turbo	Multifunción	Multifunción	Multifunción	Multifunción	Multifunción	Multifunción	Static	Static	Static	Static
117	86.6	86.6	86.6	86.6	117,1 / 106,6	102	95.2	95.2	95.2	95.2
A	A	A	A	A	A	A	A	A	A	A
0,85	0,85	0,85	0,85	0,85	0,82	0,81	0,78	0,79	0,77	0,77
0,84	0,84	0,84	0,84	0,84	0,79	0,89	-	-	-	-
1	1	1	1	1	1	1	1	1	1	1
Electricity	Electricity	Electricity	Electricity	Electricity	Electricity	Electricity	Electricity	Electricity	Electricity	Electricity
30.9	30.6	30.6	30.6	29.4	28	28	29	26.6	24.1	24.1
80	80	80	80	80	60	60	78	66	62	62
595	595	595	595	595	595	595	595	595	595	595
595	595	595	595	595	595	595	595	595	595	595
543	543	543	543	543	507	507	547	543	543	543
477	477	477	477	477	450	450	450	440	440	440
394	394	394	394	394	330	330	330	316	316	316
425	425	425	425	425	440	410	480	444	444	444
Stainles steel and Black glass	White glass	Black glass	Stainles steel and Black glass	Stainles steel and Black glass	Stainles steel and black glass	Stainles steel and black glass	Stainles steel and Black glass	White glass	Black glass	White glass
No	No	No	No	No	No	No	No	No	No	No
6	6	6	6	6	5	5	5	4	4	4
Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	No	No	No
1	1	1	1	1	1	1	1	1	1	1
Electronic - Mechanic	Electronic - Mechanic	Electronic - Mechanic	Electronic - Mechanic	Mechanic	Electronic	Mechanic	Mechanic	Mechanic	Mechanic	Mechanic
Touch with push-pull knobs	Knobs	Knobs	Knobs	Knobs	Touch control	Knobs	Knobs	Knobs	Knobs	Knobs
LED	LED	LED	LED	-	-	-	-	-	-	-
-	-	-	-	-	Yes	-	-	-	-	-
-	-	-	-	-	Yes	Yes	-	-	-	-
Yes	Yes	Yes	Yes	Yes	-	-	Yes	Yes	No	No
Yes	Yes	Yes	Yes	Yes	No	No	Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
40	40	40	40	40	50	50	50	40	40	40
240	240	240	240	240	250	250	250	240	240	240
Non-stick black	Non-stick black	Non-stick black	Non-stick black	Non-stick black	Non-stick black	Non-stick black	Non-stick black	Non-stick black	Non-stick black	Non-stick black
Flat	Flat	Flat	Flat	Flat	Embossed	Flat	Embossed	Embossed	Embossed	Embossed
Removable	Removable	Removable	Removable	Removable	Removable	Removable	Removable	Removable	Removable	Removable
No	No	No	No	No	-	-	No	No	No	No
Yes	No	No	No	No	Manual	Manual	Yes	Yes	Yes	Yes
8	7	7	7	7	6	7	4	4	4	4
No	No	No	No	No	No	No	No	No	No	No
Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Yes	No	No	No	No	No	No	No	No	No	No
2	2	2	2	2	2	2	2	2	2	2
Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
1000+2000	1000+2000	1000+2000	1000+2000	1000+2000	2250	2250	1000+2000	1000+2000	1000+2000	1000+2000
900	-	-	-	-	1100	1100	1200	1200	1200	1200
2300	2300	2300	2300	2300	-	-	-	-	-	-
2300	2300	2300	2300	2300	2180	2180	2300	2300	2300	2300
220-240 / 50/60	220-240 / 50/60	220-240 / 50/60	220-240 / 50/60	220-240 / 50/60	220-240 / 50/60	220-240 / 50/60	220-240 / 50/60	220-240 / 50/60	220-240 / 50/60	220-240 / 50/60
15	15	15	15	15	15	15	15	15	15	15
1,5	1,5	1,5	1,5	1,5	1,4	1,4	0,9	1,5	1,5	1,5
No	No	No	No	No	No	No	No	No	No	No
-	-	-	-	-	-	-	-	-	-	-
1	1	1	1	1	1	1	1	-	-	-
1	1	1	1	1	1	1	1	1	-	-
1	1	1	1	1	-	-	-	-	1	1
1	1	1	1	1	1	1	1	1	-	-
PSC-50%	PSC-50%	PSC-50%	PSC-50%	PSC-50%	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-
No	No	No	No	No	No	No	No	No	No	No
-	-	-	-	-	-	-	-	-	-	-

Code	07044351	07044600	07035409	07035009	07003307	07003000	07003305
EAN	8422248347235	8422248075831	8422248077026	8422248077033	8422248067881	8422248067898	8422248067867
Model	SES 7004 X /C	SE6204X	MRA7108BK	MRA7108WH	CMD5008X	MD 5008 WH	ME4006X
Type	Static	Static	Multifunción	Multifunción	Multifunction Turbo	Multifunction Turbo	Multifunción
Product fiche according to EU 65/2014 y EU 66/2014							
Energy efficiency index (IEE)	95,2	117,1	93,8	93,8	97,2	97,2	97,2
Energy efficiency Class	A	A	A	A	A	A	A
Energy consumption in conventional mode [kWh/cycle]	0,76	0,79	0,76	0,76	0,7	0,7	0,7
Energy consumption in fan-forced mode [kWh/cycle]	-	-	0,75	0,75	0,71	0,71	0,71
Number of cavities	1	1	1	1	1	1	1
Heat source	Electricity	Electricity	Electricity	Electricity	Electricity	Electricity	Electricity
Mass of the appliance [Kg]	25	28	28	28	30,4	30,4	30,4
Cavity volume (L)	65	65	60	60	40	40	40
Dimensions							
Width [mm]	595	595	595	595	456	456	456
Height [mm]	595	595	595	595	595	595	595
Depth [mm]	507	507	565	565	502	502	502
Cavity width [mm]	450	450	472	472	260	260	260
Cavity height [mm]	330	330	316	316	450	450	450
Cavity depth [mm]	440	440	400	400	456	456	456
Characteristics							
Finishing	Stainless steel and Black glass	Stainless steel and black glass	Black glass	White glass	Stainless steel	White glass	Stainless steel
Soft Door closing	No	No	No	No	No	No	No
Tray levels	5	5	5	5	4	4	4
Convection Fan	No	No	Yes	Yes	Yes	Yes	Yes
Number of light bulbs	1	1	1	1	1	1	1
Controls							
Oven control	Mechanic	Mechanic	Mechanic	Mechanic	Electronic	Electronic	Mechanic
Control type	Knobs	Knobs	Knobs	Knobs	Touch with push-pull knobs	Touch with push-pull knobs	Knobs
Screen Technology	-	-	-	-	LCD	LCD	-
Cooking programmer start/stop	-	-	-	-	Yes	Yes	-
Cooking programmer stop	-	Yes	-	-	-	-	-
Minute minder	No	-	Yes	Yes	-	-	No
Working pilot light	Yes	No	No	No	Yes	Yes	Yes
Thermostat pilot light	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Min. temperature [°C]	50	50	40	40	50	50	50
Max. Temperature [°C]	250	250	240	240	250	250	250
Cleaning							
Enamel	Non-stick black	Non-stick black	Non-stick black	Non-stick black	Non-stick black	Non-stick black	Non-stick black
Cavity type	Embossed	Embossed	Flat	Flat	Flat	Flat	Embossed
Inner glass	Removable	Removable	Removable	Removable	Fixed	Fixed	Fixed
Pyrolytic Cleaning	No	-	-	-	-	-	-
AquaSmart Cleaning	Yes	Manual	No	No	Manual	Manual	Manual
Functions							
Functions	4	4	7	7	8	6	6
Rapid heating	No	No	No	No	No	No	No
Inner light	Yes	Yes	No	No	Yes	Yes	Yes
Safety							
Safety lock	No	No	No	No	No	No	No
Number of door glasses	2	2	2	2	3	3	3
Cooling fan	Yes	No	Yes	Yes	Yes	Yes	Yes
Security Thermostat	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Electrical connection							
Grill power [W]	1000+2000	1600	1000 + 2000	1000 + 2000	2200	2200	2200
Bottom heating element power [W]	1200	900	1200	1200	1300	1300	1300
Back heating element power [W]	-	-	-	-	2300	2300	-
Total rated Power [W]	2300	2180	2300	2300	2380	2380	2380
Nominal voltage [V] / Mains frequency [Hz]	220-240 / 50/60	220-240 / 50/60	220-240 / 50/60	220-240 / 50/60	220-240 / 50/60	220-240 / 50/60	220-240 / 50/60
Light power [W]	15	15	15	15	25	25	25
Power cord length [m]	0,9	1,4	1,25	1,25	1	1	1
Plug	No	No	Yes	Yes	No	No	No
Accessories							
Air fry tray	-	-	-	-	-	-	-
Side racks	-	-	1	1	1	1	-
Grill	-	1	1	1	1	1	1
Shallow tray	1	-	1	1	-	-	1
Deep tray	-	1	1	1	1	1	-
Sliding rails	-	-	-	-	1	1	-
Turnspit	-	-	-	-	-	-	-
Pizza Stone (optional)	No	No	-	-	-	-	-
Gas connection hose	-	-	-	-	-	-	-

07039305	07001401	07032307	07032002
8422248093156	8422248059503	8422248059497	8422248058568
CMD 9208 BK	CDP 780 AS BK	CM 760 AS BK	CM 760 AS WH
Multifunction Turbo	Multifunction Turbo	Multifunción	Multifunción
94	117,1	117,1	117,1
A	A	A	A
1,15	0,89	0,89	0,89
0,9	0,81	0,81	0,81
1	1	1	1
Electricity	Electricity	Electricity	Electricity
47,4	36	35	35
93	50	50	50
895	595	595	595
480	595	595	595
546	480	480	480
658	410	410	410
345	325	325	325
410	375	375	375
Black glass	Stainles steel and black glass	Stainles steel and black glass	Stainles steel and white glass
No	No	No	No
5	5	5	5
Yes	Yes	Yes	Yes
2	1	1	1
Electronic	Electronic	Mechanic	Mechanic
Touch with push-pull knobs	Touch with push-pull knobs	Knobs	Knobs
LCD	LCD	-	-
No	Yes	No	No
Yes	-	No	No
No	-	Yes	Yes
Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes
50	50	50	50
250	250	250	250
Non-stick black	Non-stick black	Non-stick black	Non-stick black
Flat	Flat	Embossed	Embossed
Removable	Removable	Removable	Removable
-	-	-	-
Ñao	Manual	Manual	Ñao
10	6	6	6
No	No	No	No
Yes	Yes	Yes	Yes
Yes	No	No	No
3	2	2	2
Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes
900 + 1800	2350	2350	2350
1500	1300	1300	1300
2500	2300	-	-
2800	2450	2450	2450
220-240 / 50/60	220-240 / 50/60	220-240 / 50/60	220-240 / 50/60
2 x 25	2 x 25	25	25
1,0	1,0	1	1
No	No	No	No
-	-	-	-
1	1	-	-
1	1	1	1
-	1	-	-
1	1	1	1
-	1	-	-
-	-	-	-
-	-	-	-
-	-	-	-

Code	07510400	07510000	07510303	07510300	07511402	07511306	07510003
EAN	8422248055277	8422248055260	8422248055253	8422248048453	8422248100151	8422248108119	8422248077187
Model	MC 25 GTC BK	MC 25 GTC WH	MC 32 DC	MC 25 D ENC	MW BI2505DCG BK	MW BI2505DCG X	MMA 20 WH
Type (Built in / free standing)	Built in	Built in	Built in	Built in	Built in	Built in	Built in
DIMENSIONS							
Appliance width [mm]	595	595	595	595	592	592	595
Appliance height [mm]	388	388	388	388	390	390	382
Appliance depth [mm]	400	400	470	400	400	382	347
Cavity width [mm]	328	328	351	328	330	348	295
Cavity height [mm]	208	208	249	208	212	213	218
Cavity depth [mm]	369	369	358	369	330	334	314
Characteristics							
Finishing	Black glass	White glass	Stainless steel	Stainless steel	Black glass	Stainless steel	White glass
Door opening System	Push button	Push button	Push button	Push button	Push button	Push button	Push button
Cavity capacity [L]	25	25	32	25	25	25	20
Cavity type	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Inside light	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Opening door angle [degrees]	90	90	90	90	88	90	90
Noise level db[A]	63	63	63	63	68	68	63
Controls							
Control type	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Mechanic
Display technology	Red LCD	Red LCD	Red LCD	White LCD	White LCD	White LCD	-
Electronic timer	Yes	Yes	Yes	Yes	Yes	Yes	No
Manual timer	No	No	No	No	No	No	Yes
Start/Stop button	Yes	Yes	Yes	Yes	Yes	Yes	No
Timer [min]	95	95	95	95	60	60	35
Power selector	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Function and temperature selector	Function selector	Function selector	Function selector	Function selector	Function selector	Function selector	No
Working indicator	LED display	LED display	LED display	LED display	LED display	LED display	No
Weight selector	Yes	Yes	Yes	Yes	Yes	Yes	No
Programs							
Number of programmes	8	8	10	8	8	6	9
Grill	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Simultaneous grill + microwave	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Convection fan	No	No	Yes	No	No	No	No
Defrosting, heating and cooking by food type	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Memories	No	No	No	No	No	Yes	No
Quick start	Yes	Yes	Yes	Yes	Yes	Yes	No
Safety							
Safety thermostat	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Safety automatic disconnection	No	No	No	No	No	No	No
Child safety lock	Yes	Yes	Yes	Yes	Yes	Yes	No
Door temperature	65	65	65	65	65	65	65
N° of glasses in the door	1	1	1	1	1	1	1
Electrical connection							
Grill power [W]	1000	1000	1100	1000	1200	1200	1000
Microwave power [W]	900	900	900	900	900	900	800
Convection power [W]	-	-	2500	-	-	-	-
Rated power [W]	1450	1450	1550	1450	1280	1400	1250
Voltage / Frequency [V/Hz]	230 / 50	230 / 50	230-240 / 50	230 / 50	220 - 240 V / 50Hz	230 / 50	230 / 50
Power cord length	1000	1000	1000	1000	1100	1100	1000
Plug type	Schuko	Schuko	Schuko	Schuko	Schuko	Schuko	Schuko
Accessories							
Rotatory removable glass	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Diameter of glass dish [mm]	315	315	315	315	315	315	245
Built in frame	Included	Included	Included	Included	Included	Included	Included
Ventilation kit	No	No	No	No	No	No	No

07510308	07510301	07510306
8422248077170	8422248049450	8422248058476
MMA 20 X	MC 20 D ENC	MC 20 IX
Built in	Built in	Built in
595	595	595
382	388	388
347	347	347
295	295	295
218	218	218
314	314	314
Stainless steel	Stainless steel	Stainless steel
Push button	Push button	Push button
20	20	20
Stainless steel	Stainless steel	Stainless steel
Yes	Yes	Yes
90	90	90
63	63	63
Mechanic	Electronic	Mechanic
-	Red LCD	-
No	Yes	No
Yes	No	Yes
No	Yes	No
35	95	35
Yes	Yes	Yes
No	Function selector	No
No	LED display	No
No	Yes	No
9	8	9
Yes	Yes	Yes
Yes	Yes	Yes
No	No	No
Yes	Yes	Yes
No	No	No
No	Yes	No
Yes	Yes	Yes
No	No	No
No	Yes	No
65	65	65
1	1	1
1000	1000	1000
800	800	800
-	-	-
1250	1250	1250
230 / 50	230 / 50	230 / 50
1000	1000	1000
Schuko	Schuko	Schuko
Yes	Yes	Yes
245	245	245
Included	Included	Included
No	No	No

Code	08024202	08081206	08063102	08026001	08026002	08026003	08026609	08000405	08000406
EAN	8422248079631	8422248079648	8422248077675	8422248054485	8422248059190	8422248059206	8422248069014	8422248109406	8422248198554
Model	IDF 9012 PRO BK	IDF 8021 PRO BK	IDB 6003 PRO BK	GIGA 750 BK	GIGA 600 BK	GIGA 600 WH	GIGA 600 SD	AS 750	AS 600
Type	Induction	Induction	Induction	Induction	Induction	Induction	Induction	Surface	Surface
Product fiche									
Cooking zones	5	4	3	6	4	4	4	4	4
Right front zone: Diameter (mm)	210x200	180	-	237x189	237x189	237x189	237x189	190x190	190x190
Right front zone: Power (kW)	2	1,2	-	2,1	2,1	2,1	2,1	2	2
Right front zone: Booster (kW)	2,8	1,5	-	3,7	3,7	3,7	3,7	2,8	2,8
Right front zone: Consumption (Wh/kg)	182,7	179,5	-	182,7	182,7	182,7	182,7	206,8	206,8
Right rear zone: Diameter (mm)	210x200	-	300	237x189	237x189	237x189	237x189	190x190	190x190
Right rear zone: Power (kW)	1,5	-	2,3	2,1	2,1	2,1	2,1	1,5	1,5
Right rear zone: Booster (kW)	2	-	3	3,7	3,7	3,7	3,7	2	2
Right rear zone: Consumption (Wh/kg)	182,9	-	180,8	182,7	182,7	182,7	182,7	181,5	181,5
Central front zone: Diameter (mm)	-	-	-	237x189	-	-	-	-	-
Central front zone: Power (kW)	-	-	-	2,1	-	-	-	-	-
Central front zone: Booster (kW)	-	-	-	3,7	-	-	-	-	-
Central front zone: Consumption (Wh/kg)	-	-	-	182,7	-	-	-	-	-
Central rear zone: Diameter (mm)	300	300	-	237x189	-	-	-	-	-
Central rear zone: Power (kW)	2,3	2,3	-	2,1	-	-	-	-	-
Central rear zone: Booster (kW)	3	3	-	3,7	-	-	-	-	-
Central rear zone: Consumption (Wh/kg)	216,3	216,3	-	182,7	-	-	-	-	-
Front left zone: Diameter (mm)	210x200	210x200	230	237x189	237x189	237x189	237x189	190x190	190x190
Front left zone: Power (kW)	1,5	1,5	2,3	2,1	2,1	2,1	2,1	2	2
Front left zone: Booster (kW)	2	2	2,6	3,7	3,7	3,7	3,7	2,8	2,8
Front left zone: Consumption (Wh/kg)	182,9	182,9	184,1	182,7	182,7	182,7	182,7	194,2	194,2
Left rear zone: Diameter (mm)	210x200	210x200	180	237x189	237x189	237x189	237x189	190x190	190x190
Left rear zone: Power (kW)	2	2	1,2	2,1	2,1	2,1	2,1	1,5	1,5
Left rear zone: Booster (kW)	2,8	2,8	1,5	3,7	3,7	3,7	3,7	2	2
Left rear zone: Consumption (Wh/kg)	182,7	182,7	181,7	182,7	182,7	182,7	182,7	181,5	181,5
Energy consumption of the hob (Wh/kg)	189,5	190,4	182,2	182,7	182,7	182,7	182,7	194,2	194,2
Dimensions									
Product width (mm)	900	800	590	770	590	590	590	770	590
Product depth (mm)	520	520	520	520	520	520	520	520	520
Product height (mm)	60	60	60	50	50	50	50	250	275
Built-in height (mm)	875	745	565	755	565	565	565	750	565
Built-in depth (mm)	495	495	495	495	495	495	495	490	490
Ventilation slot (mm)	5	5	5	5	5	5	5	5	5
Fixing system	Quick-Fix System	Quick-Fix System	Quick-Fix System	Quick-Fix System	Quick-Fix System	Quick-Fix System	Quick-Fix System	Quick-Fix System	Quick-Fix System
Finishing									
Colour	Black	Black	Black	Black	Black	White	Sand	Black	Black
Aesthetic	Front bevel	Front bevel	Front bevel	Front bevel	Front bevel	Front bevel	Front bevel	Front bevel	Front bevel
Control									
Control type	5" TFT Touch Screen	5" TFT Touch Screen	5" TFT Touch Screen	Independent Slider for each area	Independent Slider for each area	Independent Slider for each area	Independent Slider for each area	Touch	Touch
Power selection (+/-)	Centralized	Centralized	Centralized	Individual per zone	Individual per zone	Individual per zone	Individual per zone	Centralized	Centralized
Power levels	9 + Booster	9 + Booster	9 + Booster	9 + Booster	9 + Booster	9 + Booster	9 + Booster	9 + Booster	9 + Booster
Timer	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Countdown alarm	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Power management	Yes	Yes	Yes	No	No	No	No	No	No
Security									
Safety lock	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Residual heat indicator	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Automatic pan detection	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Automatic safety switch-off	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Protection against liquid spillage	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Electrical connection									
Nominal voltage (V)	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240
Mains frequency (Hz)	50-60	50-60	50-60	50-60	50-60	50-60	50-60	50-60	50-60
Max Product power (kW)	9	7,2	7,1	11	7,4	7,4	7,4	7,33	7,33

08024402	08081401	08063404	08053000	08063500	08063122	08063123	08063116	08063120	08073212	08040406	08063121
8422248109413	8422248109536	8422248109482	8,42225E+12	8422248108577	8422248355735	8422248357159	8422248351836	8422248355919	8422248112703	8422248079594	8422248355926
INSB 9012 BK	INSB 8021 BK	INSB 6032 BK	INSB 6030 WH	INSB 6028 BK	INSB 6003E2	INSB 6003E2 WH	IBS 6303E2	IB 6303E2 BK	ISB 603 BK /A	INSB 6004 BK	IB 6403E2 BK
Induction	Induction	Induction	Induction	Induction	Induction	Induction	Induction	Induction	Induction	Induction	Induction
5	4	3	3	3	3	3	3	3	3	4	3
210x200	180	-	-	-	-	-	-	-	-	160	-
2	1,2	-	-	-	-	-	-	-	-	1,2	-
2,8	1,5	-	-	-	-	-	-	-	-	1,5	-
182,7	179,5	-	-	-	-	-	-	-	-	182,8	-
210x200	-	320/190	300/180	280/180	300	300	280	280	280	180	250
1,5	-	3/1,5	3	3	2,3	2,3	2,3	2,3	2,3	1,8	1,8
2	-	3,6/1,8	3,6	3,6	3	3	3	3	3	2,3	2,3
182,9	-	175,4	175,4	175,4	180,8	180,8	180,8	180,8	180,8	179,2	181,5
-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-
300	300	-	-	-	-	-	-	-	-	-	-
2,3	2,3	-	-	-	-	-	-	-	-	-	-
3	3	-	-	-	-	-	-	-	-	-	-
216,3	216,3	-	-	-	-	-	-	-	-	-	-
210x200	210x200	210	210	210	230	230	210	210	210	210	180
1,5	1,5	2,3	2,3	2,3	2,3	2,3	2,3	2,3	2,3	2,3	1,8
2	2	2,6	2,6	2,6	2,6	2,6	2,6	2,6	2,6	2,6	-
182,9	182,9	191,5	191,5	191,5	184,1	184,1	184,1	184,1	184,1	182,9	183,4
210x200	210x200	160	160	160	180	180	160	160	160	160	160
2	2	1,2	1,2	1,2	1,2	1,2	1,2	1,2	1,2	1,2	1,5
2,8	2,8	1,5	1,5	1,5	1,5	1,5	1,5	1,5	1,5	1,5	-
182,7	182,7	194,8	194,8	194,8	181,7	181,7	181,7	181,7	181,7	182,8	181,7
189,5	190,4	187,2	187,2	187,2	182,2	182,2	182,2	182,2	182,2	184	182,2
900	800	630	590	590	590	590	590	590	590	590	590
520	520	520	520	520	520	520	520	520	520	520	520
60	60	60	60	60	58	58	58	58	58	58	58
875	745	565	565	565	560	560	560	560	565	565	560
495	495	495	495	495	490	490	490	490	495	495	490
5	5	5	5	5	-	-	-	-	5	5	-
Quick-Fix System	Quick-Fix System	Quick-Fix System	Quick-Fix System	Quick-Fix System	Quick-Fix System	Quick-Fix System	Quick-Fix System	Quick-Fix System	Quick-Fix System	Quick-Fix System	Quick-Fix System
Black	Black	Black	White	Black	Black	White	Black	Black	Negro	Negro	Black
Front bevel	Front bevel	Front bevel	Front bevel	Front bevel	Front bevel	Front bevel	Rounded	Rounded	Rounded	Front bevel	Rounded
Independent Slider for each area	Independent Slider for each area	Independent Slider for each area	Independent Slider for each area	Independent Slider for each area	Independent Slider for each area	Independent Slider for each area	Independent Slider for each area	Touch	Slider	Independent Slider for each area	Touch
Individual per zone	Individual per zone	Individual per zone	Individual per zone	Individual per zone	Individual per zone	Individual per zone	Individual per zone	Centralized	Centralized	Individual per zone	Centralized
9 + Booster	9 + Booster	9 + Booster	9 + Booster	9 + Booster	9 + Booster	9 + Booster	9 + Booster	9 + Booster	9 + Booster	9 + Booster	9 + Booster
Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	No	No	No	No
No	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	No	Yes
Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240
50-60	50-60	50-60	50-60	50-60	50-60	50-60	50-60	50-60	50-60	50-60	50-60
9	7,2	7,1	7,1	7,1	7,1	7,1	7,1	7,1	7,1	7,2	5,3

Code	08074007	08001206	08063119	08081210	08081202	08081100	08027206	08060004
EAN	8422248094191	8422248355278	8422248355704	8422248109529	8422248054478	8422248075473	8422248060189	8422248357395
Model	IB 5003 BK	IB 6304E2 BK	IB 6324E2 BK	IB 853 BK	IB 753 BK	IB 073 BK	IB 772 /A	IB 4003 BK
Type	Inducción	Inducción	Inducción	Induction	Induction	Induction	Induction	
Product fiche								
Cooking zones	3	4	4	3	3	3	2	3
Right front zone: Diameter (mm)	-	160	160	-	-	-	-	-
Right front zone: Power (kW)	-	1,2	1,2	-	-	-	-	-
Right front zone: Booster (kW)	-	1,5	1,5	-	-	-	-	-
Right front zone: Consumption (Wh/kg)	-	183,4	183,4	-	-	-	-	-
Right rear zone: Diameter (mm)	280	180	180	270	270	270	210	210
Right rear zone: Power (kW)	2,3	1,8	1,8	2,3	2,3	2,3	2,3	1,8
Right rear zone: Booster (kW)	3	2,3	2,3	3	3	3	2,6	2,3
Right rear zone: Consumption (Wh/kg)	180,8	180,8	180,8	187,2	187,2	187,2	176,3	181,5
Central front zone: Diameter (mm)	-	-	-	-	-	-	-	-
Central front zone: Power (kW)	-	-	-	-	-	-	-	-
Central front zone: Booster (kW)	-	-	-	-	-	-	-	-
Central front zone: Consumption (Wh/kg)	-	-	-	-	-	-	-	-
Central rear zone: Diameter (mm)	-	-	-	180	180	180	-	-
Central rear zone: Power (kW)	-	-	-	1,4	1,4	1,4	-	-
Central rear zone: Booster (kW)	-	-	-	-	-	-	-	-
Central rear zone: Consumption (Wh/kg)	-	-	-	184,9	184,9	184,9	-	-
Front left zone: Diameter (mm)	180	180	210	220	220	220	-	180
Front left zone: Power (kW)	1,8	1,8	2	2,3	2,3	2,3	-	1,2
Front left zone: Booster (kW)	2,3	2,3	2,3	3	3	3	-	1,5
Front left zone: Consumption (Wh/kg)	184,9	180,8	182,9	176,3	176,3	176,3	-	183,4
Left rear zone: Diameter (mm)	160	160	160	-	-	-	280	160
Left rear zone: Power (kW)	1,2	1,2	1,2	-	-	-	2,3	1,2
Left rear zone: Booster (kW)	1,5	1,5	1,5	-	-	-	3	1,5
Left rear zone: Consumption (Wh/kg)	181,7	195,4	195,4	-	-	-	180,8	181,7
Energy consumption of the hob (Wh/kg)	182,5	185,3	185,3	182,8	182,8	182,8	178,6	182,2
Dimensions								
Product width (mm)	590	590	590	800	770	730	750	440
Product depth (mm)	520	520	520	400	390	430	450	510
Product height (mm)	58	58	58	68	68	68	68	60
Built-in height (mm)	565	560	560	750	750	710	710	430
Built-in depth (mm)	495	490	490	370	370	410	410	490
Ventilation slot (mm)	5	-	-	5	5	5	5	-
Fixing system	Quick-Fix System	Quick-Fix System	Quick-Fix System	Quick-Fix System	Quick-Fix System	Quick-Fix System	Quick-Fix System	Quick-Fix System
Finishing								
Colour	Black	Black	Black	Black	Black	Black	Black	Black
Aesthetic	Rounded	Rounded	Rounded	Rounded	Rounded	Front bevel	Front bevel	Rounded
Control								
Control type	Touch	Touch	Touch	Touch	Touch	Slider	Slider	Touch
Power selection (+/-)	Centralized	Centralized	Centralized	Centralized	Centralized	Centralized	Centralized	Centralized
Power levels	9 + Booster	9 + Booster	9 + Booster	9 + Booster	9 + Booster	9 + Booster	9 + Booster	9 + Booster
Timer	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Countdown alarm	No	No	No	Yes	Yes	Yes	Yes	No
Power management	No	Yes	Yes	No	No	No	No	Yes
Security								
Safety lock	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Residual heat indicator	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Automatic pan detection	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Automatic safety switch-off	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Protection against liquid spillage	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Electrical connection								
Nominal voltage (V)	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240
Mains frequency (Hz)	50-60	50-60	50-60	50-60	50-60	50-60	50-60	50-60
Max Product power (kW)	6,5	7	7	6,7	6,7	6,7	5,6	5,3

08003209	08027208	08003405	08063413	08040011	08072202	08063212	08063411	08077001	08060001	08060405	08049007
8422248092135	8422248109420	8422248109314	8422248357357	8422248109321	8422248109505	8422248109475	8422248109499	8422248109512	8422248357388	8422248109444	8422248109437
IB 302	IB 2 PLUS BK	ISB 3102 BK	TDM 6003	TN 604 /B	606 HVI /C	TT 6003	TD 6003 BK	TT 5003	TT 4003 BK	TD 3002 BK /A	VI 302 /D
Induction	Induction	Induction	Radiant	Radiant	Radiant	Radiant	Radiant	Radiant	Radiant	Radiant	Radiant
2	2	2	3	4	4	3	3	3	3	2	2
-	-	180	180	180	160	185	180	180	210/180	-	-
-	-	1,2	1,8	1,8	1,2	1,8	1,8	1,8	2,3/1,2	-	-
-	-	1,5	-	-	-	-	-	-	-	-	-
-	-	183,2	195,4	191,3	183,82	172,4	195,4	147,1	147,1	-	-
-	180	200	140	140	195	150	140	140	-	-	-
-	1,4	2	1,2	1,2	1,8	1,2	1,2	1,2	-	-	-
-	-	2,3	-	-	-	-	-	-	-	-	-
-	184,9	180,2	185,4	194,1	183,33	180,4	185,4	147	-	-	-
160	-	-	-	-	-	-	-	-	-	159	160
1,2	-	-	-	-	-	-	-	-	-	1,2	1,2
1,5	-	-	-	-	-	-	-	-	-	-	-
183,2	-	-	-	-	-	-	-	-	-	190,5	183,82
180	-	-	-	-	-	-	-	-	-	190/120	195
2	-	-	-	-	-	-	-	-	-	2,0/1,0	1,8
2,3	-	-	-	-	-	-	-	-	-	-	-
180,2	-	-	-	-	-	-	-	-	-	181,3	183,33
-	-	-	-	140	195	-	-	-	180	-	-
-	-	-	-	1,2	1,8	-	-	-	1,8	-	-
-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	187,7	183,33	-	-	-	147,1	-	-
-	220	-	270/210	180	160	280/220/155	270/210	270/210/145	150	-	-
-	2,3	-	2,4/1,5	1,8	1,2	2,7/1,8/0,9	2,4/1,5	2,7/1,95/1,05	1,2	-	-
-	3	-	-	-	-	-	-	-	-	-	-
-	176,3	-	193,5	183,4	183,82	174	193,5	140,1	147	-	-
182,2	180,6	182,2	191,4	189,1	183,57	175,5	191,4	144,7	144,7	185,9	183,57
290	590	290	590	590	590	590	590	600	440	290	290
520	350	520	520	520	520	520	520	435	510	520	520
65	68	65	67	67	44	47	67	67	52	65	44
265	560	265	560	560	560	560	560	580	430	265	270
495	330	495	490	490	490	490	490	415	490	495	490
5	5	5	-	-	-	-	-	-	-	-	-
Quick-Fix System	Quick-Fix System	Quick-Fix System	Quick-Fix System	Quick-Fix System	Quick-Fix System	Quick-Fix System	Quick-Fix System	Quick-Fix System	Quick-Fix System	Quick-Fix System	Quick-Fix System
Black	Black	Black	Black	Black	Black	Black	Black	Black	Black	Black	Black
Front bevel	Front bevel	Rounded	Rounded	Rounded	Rounded	Rounded	Rounded	Rounded	Rounded	Rounded	Rounded
Slider	Slider	Slider	Independent Slider for each area	Touch	Mechanical	Touch	Touch	Touch	Touch	Touch	Mechanical
Centralized	Centralized	Centralized	Centralized	Centralized	Knobs	Centralized	Centralized	Centralized	Centralized	Centralized	Knobs
9 + Booster	9 + Booster	9 + Booster	9	9	9	9	9	9	9	9	9
Yes	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	No
Yes	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	No
No	No	No	No	No	No	No	No	No	No	No	No
Yes	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	No
Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Yes	Yes	Yes	No	No	No	No	No	No	No	No	No
Yes	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	No
Yes	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	No
220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240
50-60	50-60	50-60	50-60	50-60	50-60	50-60	50-60	50-60	50-60	50-60	50-60
3,5	3,7	3,5	5,4	6	6	5,7	5,4	5,7	5,3	3,2	3

Code	08005404	08046410	08041100	08041500	08041503	08041501	08041412
EAN	8422248081924	8422248081962	8422248072557	8422248072724	8422248078788	8422248073691	8422248058681
Model	LCI 9041 BK	L-7005 CI	LCI 6031 WH	LCI 6031 BK	LCIB 6031 BK	CCI 6031 BK	CI 631 BK A/A
Type (Glass /St.Steel /Enamelled)	Glass	Glass	Glass	Glass	Glass	Glass	Glass
Product fiche							
Suitable for City Gas	√	√	√	√	-	√	√
Suitable for LPG	-	-	-	-	√	-	-
Number of burners	5	5	4	4	4	4	4
Triple ring power [kW]	3,5	3,5	3,5	3,5	3,5	3,5	3,5
Fast power [kW]	3	3	3	3	3		
Semi-fast power [kW]	1,75	1,75	1,75	1,75	1,75	1,75	1,75
Semi-fast power [kW]	1,75	1,75				1,75	1,75
Auxilliar power [kW]	1	1	1	1	1	1	1
Triple ring consumption [l/h]	333	333	333	333	94	333	333
Fast consumption [l/h]	286	286	286	286	88		
Semi-fast 1 consumption [l/h]	167	167	167	167	69	167	167
Semi-fast 2 consumption [l/h]	167	167				167	167
Auxilliar consumption [l/h]	95	95	95	95	73	95	95
Dimensions							
Appliance width [mm]	874	700	640	640	640	590	590
Appliance depth [mm]	520	510	510	510	500	510	510
Appliance height [mm]	55	55	55	55	55	52	52
Built-in width [mm]	828	555	555	555	555	555	555
Built-in depth [mm]	478	470	475	475	475	475	475
Anchor system	Fixation brackets	Fixation brackets	Fixation brackets	Fixation brackets	Fixation brackets	Fixation brackets	Fixation brackets
Characteristics							
Plug-in autoignition	√	√	√	√	√	√	√
Enamelled Grills/Burners	-	-	-	-	-	-	√
Cast Iron Grills/Burners	√	√	√	√	√	√	-
Security							
Safety valve	√	√	√	√	√	√	√
Electrical Connection							
Nominal voltage (V)	220-240	220-240	220-240	220-240	220-240	220-240	220-240
Mains frequency (Hz)	50-60	50-60	50-60	50-60	50-60	50-60	50-60
Product power (kW)	11	11	9,25	9,25	9,25	8	8
Accessories							
LPG butane/natural kit conversor (included)	√	√	√	√	√	√	√

Code	08028403	08005350	08045305	08066002	08066011	08066600	08066312
EAN	8422248055024	8422248081948	8422248108812	8422248058735	8422248067331	8422248067775	8422248068369
Model	RCI 631 BK	LGI 9041 X	LGI 7041 X /A	LGD 631 X	GI 6031 X	GI 6004 X	GIB 6004 X
Type (Glass /St.Steel /Enamelled)	Glass	St.Steel	St.Steel	St.Steel	St.Steel	St.Steel	St.Steel
Product fiche							
Suitable for City Gas	√	√	√	-	√	√	-
Suitable for LPG	-	-	-	√	-	-	√
Number of burners	4	5	5	4	4	4	4
Triple ring power [kW]	3,5	3,5	3,5	3,5	3,5		
Fast power [kW]		3	3	3		3	3
Semi-fast power [kW]	1,75	1,75	1,75	1,75	1,75	1,75	1,75
Semi-fast power [kW]	1,75	1,75	1,75		1,75	1,75	1,75
Auxilliar power [kW]	1	1	1	1	1	1	1
Triple ring consumption [l/h]		333	333	333	333		
Fast consumption [l/h]		286	286	286		286	286
Semi-fast 1 consumption [l/h]		167	167	167	167	167	167
Semi-fast 2 consumption [l/h]		167	167		167	167	167
Auxilliar consumption [l/h]		95	95	95	95	95	95
Dimensions							
Appliance width [mm]	584	850	680	580	580	580	580
Appliance depth [mm]	510	500	500	510	500	500	500
Appliance height [mm]	55	55	45	45	45	45	45
Built-in width [mm]	452	828	555	552	555	555	555
Built-in depth [mm]	470	478	475	470	475	475	475
Anchor system	Fixation brackets	Fixation brackets	Fixation brackets	Fixation brackets	Fixation brackets	Fixation brackets	Fixation brackets
Characteristics							
Plug-in autoignition	√	√	√	√	√	√	√
Enamelled Grills/Burners	-	-	-	-	√	√	√
Cast Iron Grills/Burners	√	√	√	√	-	-	-
Security							
Safety valve	√	√	√	√	√	√	√
Electrical Connection							
Nominal voltage (V)	220-240	220-240	220-240	220-240	220-240	220-240	220-240
Mains frequency (Hz)	50-60	50-60	50-60	50-60	50-60	50-60	50-60
Product power (kW)	8	11	11	9,25	8	7,5	7,5
Accessories							
LPG butane/natural kit conversor (included)	√	√	√	√	√	√	√

08068400	08068401	08068403	08068405	08068501	08068309	08068402	08041505	08047410
8422248068352	8422248068376	8422248078795	8422248086929	8422248073707	8422248067355	8422248073677	8422248094269	8422248093743
CIB 6031 BK	LCI 6021 BK	LCIB 6021 BK	SCI 6021 BK	CCI 6021 BK	CI 6021 BK	CIB 6021 BK	CCI 5003 BK	SCI 3002 BK
Glass	Glass	Glass	Glass	Glass	Glass	Glass	Glass	Glass
-	√	-	√	√	√	-	√	√
√	-	√	-	-	-	√	-	-
4	3	3	3	3	3	3	3	2
3,5	3,5	3,5	3,5	3,5	3,5	3,5	3,5	
								3
1,75	1,75	1,75	1,75	1,75	1,75	1,75	1,75	
1,75								
1	1	1	1	1	1	1	1	1
94	333	94	333	333	333	94	333	
								286
69	167	69	167	167	167	69	167	
69								
73	95	73	95	95	95	73	95	95
590	590	580	580	590	590	590	590	300
510	510	500	500	510	510	510	450	520
52	55	55	55	52	52	52	55	55
555	555	555	555	555	555	555	555	280
475	475	475	475	475	475	475	400	480
Fixation brackets	Fixation brackets	Fixation brackets	Fixation brackets	Fixation brackets	Fixation brackets	Fixation brackets	Fixation brackets	Fixation brackets
√	√	√	√	√	√	√	√	√
√	-	-	-	-	√	√	-	-
-	√	√	√	√	-	-	√	√
√	√	√	√	√	√	√	√	√
220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240
50-60	50-60	50-60	50-60	50-60	50-60	50-60	50-60	50-60
8	6,25	6,25	6,25	6,25	6,25	6,25	6,25	4
√	√	√	√	√	√	√	√	√

08068308	08068310	08039600
8422248067348	8422248073684	8422248108829
GI 6021 X	GIB 6021 X	GI 3002 X /A
St.Steel	St.Steel	St.Steel
√	-	√
-	√	-
3	3	2
3,5	3,5	
		3
1,75	1,75	
1	1	1
333	94	
		286
167	69	
95	73	95
580	580	300
500	500	520
45	45	45
555	555	280
475	475	480
Fixation brackets	Fixation brackets	Fixation brackets
√	√	√
√	√	√
-	-	-
√	√	√
220-240	220-240	220-240
50-60	50-60	50-60
6,25	6,25	4
√	√	√

Code	07200078	07200080	07200079	07820081
EAN	8422248351379	8422248351393	8422248351386	8422248351409
Model	LVI 62014	LVI 48010	LVI 62012	LVI 47010
Finish	Built-in	Built-in	Built-in	Built-in
Product fiche according to EU Regulation 2019/2022 - 2019/2017				
Rated capacity (ps)	14	10	14	10
Height (cm)	815	815	815	815
Width (cm)	598	448	598	448
Depth (cm)	550	550	550	550
Energy Efficiency Index (EEI)	49,9	49,9	55,9	55,9
Energy efficiency class (1)	D	D	E	E
Cleaning performance index (IC)	A	A	A	A
Drying performance index (ID)	A	A	A	A
Energy consumption in kWh [per cycle], based on the ECO programme (2)	0,849	0,674	0,951	0,755
Energy consumption in kWh [per 100 cycle], based on the ECO programme (2)	85	68	95	76
Water consumption in litres [per cycle], based on the ECO programme (3)	11	9	11	9
Duration of the eco programme (Tt) (h:min)	3:18	3:35	3:35	3:55
Type	Built-in	Built-in	Built-in	Built-in
Airborne acoustical noise emissions (dB(A))	47	47	47	47
Airborne acoustical noise emission class	C	C	C	C
Power consumption in off-mode (Po) (W)	0,49	0,49	0,49	0,49
Power consumption in standby mode (Psm) (W)	/	/	/	/
Delay start (W) (if applicable)	1	1	1	1
Networked standby (W) (if applicable)	No	No	No	No
Technical documentation (UE) 2019/2017				
Standard programme energy consumption (SPEC) (kWh/cycle)	1,7	1,35	1,7	1,35
Does standby mode include the display of information?	Yes	Yes	Yes	Yes
Power consumption in standby mode (Psm) in condition of networked standby (if applicable), (W)	/	/	/	/
Power consumption in delay start (Pds) (if applicable) (W)	1	1	1	1
Duration of the Left-on Mode (TI) (min) (EP)	/	/	/	/
Product dimensions				
Height min/max (mm)	815-865	815-865	815-865	815-865
Width [mm]	598	448	598	448
Depth [mm]	550	550	550	550
Adjustable legs	Yes	Yes	Yes	Yes
Cabinet and door dimensions				
Minimum cabinet height [mm]	820-870	820-870	820-870	820-870
Minimum cabinet width [mm]	600	450	600	450
Minimum cabinet depth [mm]	580	580	580	580
Max door height (built-in models) [mm]	720	720	720	720
Sliding door	No	No	No	No
Control panel				
Display / LED	Display	Display	Display	Display
Salt control pilot light	Yes	Yes	Yes	Yes
Rinse aid control pilot light	Yes	Yes	Yes	Yes
Time remaining indicator	Yes	Yes	Yes	Yes
Delay for starting operation	1-24	1-24	1-24	1-24
Programs and functions				
Number of programs	8	8	8	8
Intensive [°C-min]	65	65	65	65
Normal [°C-min] - Universal	55	55	55	55
Eco [°C-min]	50	45	45	45
Express 90' [°C-min]	55	55	60	55
Glass [°C-min]	50	50	50	50
Rapid 30' [°C-min]	40	40	45	50
Soak [min]	-	-	-	-
Automatic [°C-min]	55-65	55-65	55-65	55-65
Start / Pause function	Yes	Yes	Yes	Yes
Half load function	Yes	Yes	Yes	Yes
Extra drying function	Yes	Yes	Yes	Yes
Flex wash function (Alternative wash function)	-	-	-	-
Total Clean function (Strong wash function)	-	-	-	-
Equipment				
Upper basket with height regulation	Yes	Yes	Yes	Yes
Upper basket foldable support for cups	Yes	Yes	Yes	Yes
Upper/Lower basket foldable supports	Yes	Yes	Yes	Yes
Type of dispenser	Compact Sliding	Compact Sliding	Compact Sliding	Compact Sliding
Slide&Go tray	-	-	-	-
Third tray	Yes	Yes	-	-
Additional specifications				
Motor	Inverter	Inverter	Inverter	Inverter
Automatic door open	Yes	Yes	-	-
Enabled for all in one detergent	Yes	Yes	Yes	Yes
Type of cavity	S. steel	S. steel	S. steel	S. steel
Safety				
Child lock	Yes	Yes	Yes	Yes
Triple security system	Yes	Yes	Yes	Yes
Power and water connection				
Voltage range [V]	220-240	220-240	220-240	220-240
Frequency [Hz]	50	50	50	50
Rated power [W]	1760-2100	1760-2100	1760-2100	1760-2100
Rated current [A]	8-8,75	8-8,75	8-8,75	8-8,75
Type of plug	Schuko	Schuko	Schuko	Schuko
Power cord length [m]	1,5	1,5	1,5	1,5
Inlet water hose length [m]	1,5	1,5	1,5	1,5
Drain water hose length [m]	1,4	1,4	1,4	1,4

DISHWASHER (1) Classes range from A (most efficient) to G (least efficient) (2) Energy consumption based on the ECO program, using cold water. The actual energy consumption depends on the conditions of use of the appliance (3) Water consumption in liters per year based on the ECO program. The actual water consumption depends on the conditions of use of the appliance. This appliance is suitable for washing normally soiled dishes and is the most efficient in terms of combined energy and water consumption.

Code	07900002
EAN	8422248096942
Model	LI 08014 /A
Finish	Built-in
Product fiche according to EU Regulation 2019/2023	
Rated capacity (kg)	8
Height (cm)	83
Width (cm)	60
Depth (cm)	54
Energy Efficiency Index (EEI)	60
Energy efficiency class (I)	B
Cleaning performance index	1,04
Rinsing effectiveness (g/kg)	5
Energy consumption in kWh [per cycle], based on the ECO programme (2)	0,545
Water consumption in litres [per cycle], based on the ECO programme (3)	48
Maximum temperature inside the treated textile (°C) - Rated Capacity	37
Maximum temperature inside the treated textile (°C) - Half Capacity	33
Maximum temperature inside the treated textile (°C) - Quarter Capacity	23
Remaining moisture content (%) - Rated capacity	53
Remaining moisture content (%) - Half capacity	53
Remaining moisture content (%) - Quarter capacity	53
Spin speed (rpm) - Rated capacity	1400
Spin speed (rpm) - Half capacity	1400
Spin speed (rpm) - Quarter capacity	1400
Spin-drying efficiency class (4)	B
Programme duration (h:min) - Rated capacity	3 : 38
Programme duration (h:min) - Half capacity	2 : 48
Programme duration (h:min) - Quarter capacity	2 : 48
Type	Built-in
Airborne acoustical noise emissions in the spinning phase (dBA)	76
Airborne acoustical noise emission class (spinning phase)	B
Off-mode (W)	0,50
Standby mode (W)	1
Delay start (W)	4
Product dimensions	
Height min/max (mm)	830/850
Width (mm)	590
Depth (mm)	520
Adjustable legs	Yes
Cabinet and door dimensions	
Minimum cabinet height (mm)	840
Minimum cabinet width (mm)	600
Minimum cabinet depth (mm)	580
General features	
Loading type	Front
Motor type	Silence Inverter
Hatch door diameter (cm)	31
Drum type	Stainless Steel
Filter system	Accessible
Foam reduction system	Accessible
Load self adjustment	Yes
Control	
Control type	LED Digital Display
Independent washing temperature selection	Yes
Independent spinning speed selection	Yes
Delay start (h)	Yes
Start / Pause key	Yes
Countdown display	Yes
Washing cycle display	Yes
Programmes	
N° of programmes	16
Cotton	Yes
Sintetic	Yes
Delicates	Yes
ECO	Yes
Wool	Yes
Hand wash	Yes
Quick (min)	Yes
Mix	Yes
Sport clothes	Yes
Baby clothes	Yes
Customized	Yes
Special functions	
Prewash	Yes
Extra rinse	Yes
Safety	
Child-lock door	Yes
Anti-flooding system	Yes
Power and water connection	
Voltage range [V]	220-240
Frecuency [Hz]	50
Rated power [W]	1.950
Rated current [A]	10
Type of plug	Schuko
Power cord length [m]	150
Inlet water hose length [m]	100
Drain water hose length [m]	160

Code	07800078	07800079
EAN	8422248350945	8422248350952
Model	CI-54177 ST /D	CI-54177 NF /C
Finish	Built-in	Built-in
Product fiche according to EU Regulation 2019/2016		
Category	7	7
Energy efficiency class	E	E
Energy consumption (kWh/year) (1)	216	233
Refrigerator storage volume [l]	179	177
Freezer storage volume **** [l]	70	64
Star rating	4	4
Frost-free fridge	-	Yes
Frost-free freezer	-	Yes
Power cut safe [h]	10	10
Freezing capacity (kg/24h)	3,2	3,2
Climate class (2)	N,ST	ST
Noise emissions [dBA]	39	41
Installation type	Built-in	Built-in
Dimensions		
Height (mm)	1777	1769
Width (mm)	540	540
Depth (mm)	540	550
Opening of the door	Right	Right
Reversible doors	Yes	Yes
Wheels	-	-
External / Recessed handle	-	-
Control		
Cooling type	Static	No Frost
Control	Electronic	Electronic
Display	-	Yes
Electronic refrigerator temperature regulation	Yes	Yes
Electronic freezer temperature regulation	-	Yes
Super cooling / Super freezing function	Yes / Yes	Yes / Yes
Holiday function	-	-
Winter-Summer function	-	-
Refrigerator equipment		
Number of door balconies	3	3
Number of glass shelves	3	4
Wine rack	-	-
Drawer for fruits and vegetables	Yes	Yes
Chiller for meat and fish	-	-
Metallic inner decoration	-	Yes
Number of egg tray - Egg capacity	1-6	1-6
Freezer equipment		
Number of drawers / closed drawers	3	3/2
Ice trays / Ice cube quantity	1-12	1-12
Illumination		
Fridge - Freezer lighting	Yes - /	Yes - /
LED lighting	Yes - /	Yes - /
Power and water connection		
Voltage range [V]	220-240	220-240
Frecuency [Hz]	50	50
Rated power [W]	115	160
Rated current [A]	0,75	0,8
Type of plug	Schuko	Schuko
Power cord length [m]	1600	1800

FRIDGE (1) The actual energy consumption depends on the conditions of use of the device and its location, according to the results obtained in the standard test of 24 hours defined in EN 62552 regulation. (2) Type of climates: SN: From +10°C to +34°C ambient temperature. N: From +16°C to +32°C ambient temperature. ST: From +16°C to +38°C ambient temperature. T: From +16°C to +43°C ambient temperature.

WASHING MACHINES Normal washing program: ECO 40-60 (1) Classes range from A (most efficient) to G (least efficient). (2) Weighted annual consumption based on the ECO 40-60 program. (3) Weighted annual consumption based on the ECO 40-60 program. Actual water consumption depends on how the appliance is used. (4) On a scale from A (most efficient) to G (least efficient).

Code	07751006	07751007	07751008	07702004	07701404
EAN	8422248101790	8422248101806	8422248101837	8422248098915	8422248110785
Model	VI 15107 X	VI 30117 X	VI 54024 X	VI 59082 X /A	VI 59082 BK
Finish	Aço inoxidável	Aço Inoxidável	Aço inoxidável	Aço Inoxidável	Aço Inoxidável
Product fiche according to EU Regulation 1060/2010					
Category	Cave Vinhos com compressor	Cave Vinhos com compressor	Cave Vinhos com compressor	Cave Vinhos com compressor	Cave Vinhos com compressor
Energy efficiency class	G	G	G	G	G
Energy consumption [kWh/year]	144	137	135	144	144
Refrigerator storage volume [l]	20	52	62	129	129
Climate class	SN/N/ST	SN/N/ST	SN/N/ST	SN/N/ST	SN/N/ST
Noise emissions [dBA]	41	41	40	41	41
Installation type	Incorporado	Incorporado	Incorporado	Incorporado	Incorporado
Technical specs and control type					
Refrigerator system	Compressor	Compressor	Compressor	Compressor	Compressor
Display	Display tátil no painel frontal	Display tátil na porta	Display tátil na porta	Display tátil na porta	Display tátil na porta
Wine cooler lighting	Led	Led	Led	Led	Led
Temperature zones	1	2	1	2	2
Temperature ranges (°C)	5-20	5-22 / 5-22	5-20	5-22 / 5-22	5-22 / 5-22
Storage levels	7	5	3	6	6
Capacity (bottles)	7	17	28	46	46
Opening of the door	Direita	Direita	Direita	Direita	Direita
Reversible doors	Sim	Sim	Sim	Sim	Sim
Adjustable feet	Sim	Sim	Sim	Sim	Sim
Dimensions					
Height [mm]	870-887	825-870	455	825-870	825-870
Width [mm]	150	295	590	595	595
Depth [mm]	525	570	563	567	567
Cabinet dimensions					
Minimum cabinet height [mm]	872-889	827-872	450	827-872	827-872
Minimum cabinet width [mm]	155	300	560-568	600	600
Minimum cabinet depth [mm]	560	600	550-560	600	600
Power connection					
Voltage range [V]	220-240	220-240	220-240	220-240	220-240
Frequency [Hz]	50	50	50	50	50
Rated power [W]	60	225	65	200	200
Type of plug	Schuko	Schuko	Schuko	Schuko	Schuko
Power cord length [mm]	1500	1500	1500	1500	1500

SINKS

Code	02625006	02621006	02624006	02624016	02607101	02625300	02621009	02624007
EAN	8422248108652	8422248108645	8422248108669	8422248108638	8422248074681	8422248048743	8422248043175	8422248109000
Model	CB 50-40 R10	CB 45-40 R10	CB 40-40 P R10	CB 40-40 R10	CB-2	CB 50-40	CB 45-40	CB 40-40 / D
DIMENSIONS								
Cutout dimension (length x width) [mm]	500x400	450x400	400x400	400x400	745x415	500x400	450x400	400x400
Dimensions (length x width x depth) [mm]	540x440x200	490x440x200	440x440x250	440x440x200	785x450x200	533x433x200	480x430x180	440x440x180
GENERAL FEATURES								
Type of sink	Undermount	Undermount	Undermount	Undermount	Undermount	Undermount	Undermount	Undermount
Material	Stainless steel 304	Stainless steel 304	Stainless steel 304	Stainless steel 304	Stainless steel 304	Stainless steel 304	Stainless steel 304	Stainless steel 304
Steel thickness [mm]	1,2	1,2	1,2	1,2	0,9	0,8	0,8	0,7
Colour	Steel	Steel	Steel	Steel	Steel	Steel	Steel	Steel
BOWL AND DRAINING RACK DETAILS								
Bowl quantity	1	1	1	1	2	1	1	1
Bowl form	Square with inverted pyramid surface	Square with inverted pyramid surface	Square with inverted pyramid surface	Square with inverted pyramid surface	Square	Square	Square	Square
Draining rack	-	-	-	-	-	-	-	-
Draining rack quantity	-	-	-	-	-	-	-	-
Draining rack form	-	-	-	-	-	-	-	-
Draining rack position	-	-	-	-	-	-	-	-
Tap hole	-	-	-	-	-	-	-	-
ACCESSORIES								
Drainpipe type	Square 3 1/2"	Square 3 1/2"	Square 3 1/2"	Square 3 1/2"	Round 3 1/2"	Round 3 1/2"	Round 3 1/2"	Round 3 1/2"
Drainpipe quantity	1	1	1	1	2	1	1	1
Overflow tube	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

Code	02624302	02624008	02624009	02624010	02606603	02606601	02606602	02606503	02606501
EAN	8422248109017	8422248109024	8422248109031	8422248109048	8422248108904	8422248108911	8422248108928	8422248108935	8422248108942
Model	CBP 40-40 /A	CBS-1 40-40 D R10	CBS-2 40-40 R10	CBS-1 54-40 R10	CDL-1 REV	CDL-1 EI	CDL-1 ED	CDP-1 REV	CDP-1 EI
DIMENSIONS									
Cutout dimension (length x width) [mm]	400x400	840x490	840x490	570x490	770x480	770x480	770x480	840x480	840x480
Dimensions (length x width x depth) [mm]	440x440x200	860x510x200	860x510x200	590x510x200	790x500x180	790x500x180	790x500x180	860x500x180	860x500x180
GENERAL FEATURES									
Type of sink	Undermount	Top mount	Top mount	Top mount	Built-in countertop	Built-in countertop	Built-in countertop	Built-in countertop	Built-in countertop
Material	Stainless steel 304	Stainless steel 304	Stainless steel 304	Stainless steel 304	Stainless steel 304	Stainless steel 304	Stainless steel 304	Stainless steel 304	Stainless steel 304
Steel thickness [mm]	0,7	1,2	1,2	1,2	0,8	0,8	0,8	0,8	0,8
Colour	Steel	Steel	Steel	Steel	Steel	Steel	Steel	Steel	Steel
BOWL AND DRAINING RACK DETAILS									
Bowl quantity	1	1	2	1	1	1	1	1	1
Bowl form	Square	Square	Square	Square	Square	Square	Square	Square	Square
Draining rack	-	Yes	-	-	Yes	Yes	Yes	Yes	Yes
Draining rack quantity	-	1	-	-	1	1	1	1	1
Draining rack form	-	Square	-	-	Square	Square	Square	Square	Square
Draining rack position	-	Right	-	-	Left	Left	Right	Left	Left
Tap hole	-	Yes	Yes	Yes	-	Yes	Yes	-	Yes
ACCESSORIES									
Drainpipe type	Round 3 1/2"	Round 3 1/2"	Round 3 1/2"	Round 3 1/2"	Round 3 1/2"	Round 3 1/2"	Round 3 1/2"	Round 3 1/2"	Round 3 1/2"
Drainpipe quantity	1	1	1	1	1	1	1	1	1
Overflow tube	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

Code	02506400	02506300	02507400	02500301	02500401
EAN	8422248107914	8422248107921	8422248107938	8422248107907	8422248107891
Model	CPB	XPB	CPA	XSE	CSE
DIMENSIONS					
Dimensions (diameter, length) of spout braided hose [", cm]	3/8, 36	3/8, 36	3/8, 36	3/8, 36	3/8, 36
Product dimensions (height x width x depth) [mm]	510x290x90	510x267x92	682x290x90	294x275x90	294x275x90
Base diameter	52	54	52	51,5	51,5
GENERAL FEATURES					
Water tap type	Single-lever	Single-lever	Single-lever	Single-lever	Single-lever
Material	Brass	Acero inoxidable 304	Brass	Acero inoxidable 304	Brass
Material of handle	Cast	Acero inoxidable 304	Cast	Acero inoxidable 304	Cast
Material of spout braided hose	Stainless steel 304	Stainless steel 304	Stainless steel 304	Stainless steel 304	Stainless steel 304
Finish style	Chrome	Inox	Chrome	Inox	Chrome
Installation place	Sink, cooktop	Sink, cooktop	Sink, cooktop	Sink, cooktop	Sink, cooktop
SPOUT AND CONTROL DETAILS					
Spout type	Long	Long	Long	Long	Long
Spout form	Semi-professional	Semi-professional	Semi-professional	L form	L form
Removable spout	Yes	Yes	Yes	Yes	Yes
Rotatory spout	Yes / 360°	Yes / 360°	Yes / 360°	Yes / 360°	Yes / 360°
Airy spout	Yes	Yes	Yes	Yes	Yes
Antiscale areator	Yes	Yes	Yes	Yes	Yes
Shower function	Yes	Yes	Yes	Yes	Yes
Flow limiter 6 litre/minute	Yes	Yes	Yes	Yes	Yes
Lead Free	Yes	Yes	Yes	Yes	Yes
Cold start	Handle	Handle	Handle	Handle	Handle
Control type					
Control position	Ceramic discs	Ceramic discs	Ceramic discs	Ceramic discs	Ceramic discs
ACCESSORIES					
Cartridge type	Ceramic discs	Ceramic discs	Ceramic discs	Ceramic discs	Ceramic discs
Easy Installation	Yes	Yes	Yes	Yes	Yes
Flexible M10x1x3/8" x 360mm Inox certified installation hose	Yes	Yes	Yes	Yes	Yes

Code	02500601	02500400	02503400	02502400	02501400
EAN	8422248355308	8422248107884	8422248107877	8422248107860	8422248107778
Model	BSE	CSA/B	CMA/G	CBA/G	CBB/B
DIMENSIONS					
Dimensions (diameter, length) of spout braided hose [", cm]	3/8, 36	3/8, 36	3/8, 36	3/8, 36	3/8, 36
Product dimensions (height x width x depth) [mm]	294x275x90	321x255x117	380x230x95	290x220x105	260x156x52
Base diameter	51,5	52	50	50	52
GENERAL FEATURES					
Water tap type	Single-lever	Single-lever	Single-lever	Single-lever	Single-lever
Material	Brass	Brass	Brass	Brass	Brass
Material of handle	Cast	Cast	Cast	Cast	Cast
Material of spout braided hose	Stainless steel 304	Stainless steel 304	Stainless steel 304	Stainless steel 304	Stainless steel 304
Finish style	Black	Chrome	Chrome	Chrome	Chrome
Installation place	Sink, cooktop	Sink, cooktop	Sink, cooktop	Sink, cooktop	Sink, cooktop
SPOUT AND CONTROL DETAILS					
Spout type	Long	Long	Long	Long	Short
Spout form	L form	L form	Curved	Curved	Line
Removable spout	Yes	No	No	No	No
Rotatory spout	Yes / 360°	Yes / 360°	Yes / 360°	Yes / 360°	Yes / 360°
Airy spout	Yes	Yes	Yes	Yes	Yes
Antiscale areator	Yes	Yes	Yes	Yes	Yes
Shower function	Yes	No	No	No	No
Flow limiter 6 litre/minute	Yes	Yes	Yes	Yes	Yes
Lead Free	Yes	Yes	Yes	No	No
Cold start	Handle	Handle	Handle	Handle	Handle
Control type					
Control position	Ceramic discs	Ceramic discs	Ceramic discs	Ceramic discs	Ceramic discs
ACCESSORIES					
Cartridge type	Ceramic discs	Ceramic discs	Ceramic discs	Ceramic discs	Ceramic discs
Easy Installation	Yes	Yes	Yes	Yes	Yes
Flexible M10x1x3/8" x 360mm Inox certified installation hose	Yes	Yes	Yes	Yes	Yes

02606502	02603300	02606400	02606401	02606402	02607102	02604209	02612300	02612400	02612101	02602100
8422248108959	8422248074414	8422248074421	8422248108973	8422248108980	8422248109055	8422248043151	8422248074377	8422248074384	8422248055338	8422248108997
CDP-1 ED	RD-1 REV	CDS-1 REV	CDS-1 EI	CDS-1 ED	C-2 AG / B	R-2 AG	CSS60-2	CSS-2	CS-2	RS-1 / A
840x480	880x450	765x355	765x355	765x355	770x480	820x420	580x480	465x415	442x462	Ø465
860x500x180	900x470x150	788x448x150	788x448x150	788x448x150	790x500x200	850x450x180	609x509x150	490x440x150	465x485x165	485x160
Built-in countertop	Built-in countertop	Built-in countertop	Built-in countertop	Built-in countertop	Built-in countertop	Built-in countertop	Built-in countertop	Built-in countertop	Built-in countertop	Built-in countertop
Stainless steel 304	Stainless steel 304	Stainless steel 304	Stainless steel 304	Stainless steel 304	Stainless steel 304	Stainless steel 304	Stainless steel 304	Stainless steel 304	Stainless steel 304	Stainless steel 304
0,8	0,8	0,5	0,5	0,5	0,7	0,7	0,7	0,7	0,7	0,7
Steel	Steel	Steel	Steel	Steel	Steel	Steel	Steel	Steel	Steel	Steel
1	1	1	1	1	2	2	1	1	1	1
Square	Round	Square	Square	Square	Square	Round	Square	Square	Square	Round
Yes	Yes	Yes	Yes	Yes	-	-	-	-	-	-
1	1	1	1	1	-	-	-	-	-	-
Square	Round	Square	Square	Square	-	-	-	-	-	-
right	Reversible	Left	Left	right	-	-	-	-	-	-
Yes	-	-	Yes	Yes	Yes	Yes	-	-	Yes	Yes
Round 3 1/2"	Round 3 1/2"	Round 3 1/2"	Round 3 1/2"	Round 3 1/2"	Round 3 1/2"	Round 3 1/2"	Round 3 1/2"	Round 3 1/2"	Round 3 1/2"	Round 3 1/2"
1	1	1	1	1	2	2	1	1	1	1
Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

CODE	03114001	03112001	03111001	03112004	03111004
EAN CODE	8422248102520	8422248081474	8422248081467	8422248081580	8422248081573
Model	CTRS-100 REV SLIM	CTRS-80 REV SLIM /A	CTRS-50 REV SLIM /A	CTRH-80-REV	CTRH-50-REV
Type (Electric/Gas)	Electric	Electric	Electric	Electric	Electric
Product fiche according to EU Regulation n° 812/2013					
Declared Load Profile	M	M	M	M	M
Energy Efficiency Class	B	B	B	C	C
Energy Efficiency of Water Heating η_{wh}	42	39	41,3	36	36
Annual Electricity Consumption AEC (kWh/year)	1228	1316	1243	1427	1426
Temperature adjusted Thermostat Tout of box	75°C	75°C	75°C	75°C	75°C
Daily Electricity Consumption Qelec (kWh)	8,458	9,745	8,829	6,692	6,689
Mixed water at 40°C (l)	144	108	76	91	68
Maximum Thermostat Temperature Tmax	75°C	75°C	75°C	75°C	75°C
Out of the Box mode Tout of box	75°C	75°C	75°C	75°C	75°C
External Dimensions					
Width (mm)	570	570	470	385	385
Height (mm)	1090	900	860	1030	711
Depth (mm)	300	300	250	385	385
Net weight (Kg)	40,7	32,45	25,86	24,55	18,2
Features					
Capacity (l)	93	74	47	73	46
Number of people		2-4	2-3	2-4	2-3
Installation	VERTICAL/HORIZONTAL	VERTICAL/HORIZONTAL	VERTICAL/HORIZONTAL	VERTICAL/HORIZONTAL	VERTICAL/HORIZONTAL
Water connection size	G1/2	G1/2	G1/2	G1/2	G1/2
Temperature Regulation range (°C)	30-75	30-75	30-75	30-75	30-75
Type of heating elements	Enamel	Enamel	Enamel	Enamel	Enamel
Heating Time to 65° C (+50°C)	2,61h	2,33h	1,46h	3,11h	1,94h
Static losses to 65°C (kWh in 24h)	3,2	2,11	1,41	1,66	1,03
Average thickness of insulation (mm)	0,15-0,5	0,15-0,5	0,15-0,5	0,15-0,5	0,15-0,5
Controls					
Control Type	ELECTRONIC	ELECTRONIC	ELECTRONIC	MECHANICAL	MECHANICAL
Thermostat control location	Front	Front	Front	Front	Front
Connection indicator	YES	YES	YES	YES	YES
Temperature indicator light	YES	YES	YES	YES	YES
Heating indicator light	YES	YES	YES	YES	YES
Safety					
Overheating Protection	YES	YES	YES	YES	YES
Protection temperature °C	101	101	101	95°	95°
Antifreeze protection	YES	YES	YES	NO	NO
Protection against humidity	IPX4	IPX4	IPX4	IPX4	IPX4
Highest Pressure (Mpa)	0,75	0,75	0,75	0,75	0,75
Magnesium Anode dimensions (mm)	ø22*234	ø22*296	ø22*234	ø22*296	ø22*234
Power connection					
Rated power [W]	1200/2000	1200/2000	1200/2000	1500	1500
Voltage range [V]	220-240	220-240	220-240	220-240	220-240
Frequency [Hz]	50/60	50/60	50/60	50/60	50/60
Rated current [A]	8,69	8,69	8,69	6,52	6,52
Power cord length [m]	1,5	1,5	1,5	1,5	1,5

CODE	03113001	03112003	03111003	03110001	03110003	03109000
EAN CODE	8422248081559	8422248081542	8422248081535	8422248081528	8422248096621	8422248096638
Model	CTR-100-M	CTR-80-M	CTR-50-M	CTR-30-M	CTRC-30-M	CTRC-15-M
Type (Electric/Gas)	Electric	Electric	Electric	Electric	Electric	Electric
Product fiche according to EU Regulation n° 812/2013						
Declared Load Profile	M	M	M	S	S	XXS
Energy Efficiency Class	C	C	C	C	C	A
Energy Efficiency of Water Heating η_{wh}	36,2	37,1	36,6	31,6	33	35
Annual Electricity Consumption AEC (kWh/year)	1420	1382	1404	583	558	522
Temperature adjusted Thermostat Tout of box	75°C	75°C	75°C	75°C	75	75
Daily Electricity Consumption Qelec (kWh)	6,653	6,428	6,56	2,82	2,674	2,462
Mixed water at 40°C (l)	103	75	73	44	28	16
Maximum Thermostat Temperature Tmax	75°C	75°C	75°C	75°C	75	75°C
Out of the Box mode Tout of box	75°C	75°C	75°C	75°C	75	75°C
External Dimensions						
Width (mm)	450	450	385	340	440	368
Height (mm)	970	805	770	650	440	368
Depth (mm)	450	450	385	340	420	340
Net weight (Kg)	31,1	25,8	19,9	15	13,5	9,6
Features						
Capacity (l)	100	80	50	30	30	15
Number of people	3-5	2-4	2-3	1-2	1-2	1-2
Installation	VERTICAL	VERTICAL	VERTICAL	VERTICAL	VERTICAL	VERTICAL
Water connection size	G1/2	G1/2	G1/2	G1/2	G1/2	G1/2
Temperature Regulation range (°C)	30-63	30-75	30-75	30-75	30-65	30-75
Type of heating elements	Enamel	Enamel	Enamel	Enamel	Enamel	Enamel
Heating Time to 65° C (+50°C)	3,89h	3,11h	1,94h	1,17h	0,55	1,11
Static losses to 65°C (kWh in 24h)	1,43	1,38	0,88	0,81	2,46	2,67
Average thickness of insulation (mm)	0,15-0,5	0,15-0,5	0,15-0,5	0,15-0,5	0,15-0,5	0,15-0,5
Controls						
Control Type	MECHANICAL	MECHANICAL	MECHANICAL	MECHANICAL	MECHANICAL	MECHANICAL
Thermostat control location	Under Bottom Cover	Under Bottom Cover	Under Bottom Cover	Under Bottom Cover	Front	Front
Connection indicator	NO	NO	NO	NO	NO	NO
Temperature indicator light	YES	YES	YES	YES	NO	NO
Heating indicator light	YES	YES	YES	YES	NO	NO
Safety						
Overheating Protection	YES	YES	YES	YES	YES	YES
Protection temperature °C	69	82	82	82	101	101
Antifreeze protection	NO	NO	NO	NO	NO	NO
Protection against humidity	IPX4	IPX4	IPX4	IPX4	IPX4	IPX4
Highest Pressure (Mpa)	0,75	0,75	0,75	0,75	0,75	0,75
Magnesium Anode dimensions (mm)	ø22*296	ø22*296	ø22*234	ø22*234	ø18*110	ø18*110
Power connection						
Rated power [W]	1500	1500	1500	1500	1500	1500
Voltage range [V]	220-240	220-240	220-240	220-240	220-240	220-240
Frequency [Hz]	50/60	50/60	50/60	50/60	50/60	50/60
Rated current [A]	6,52	6,52	6,52	6,52	6,52	6,52
Power cord length [m]	1,5	1,5	1,5	1,5	1,5	1,5

HOODS

		LOADINGS					LANGUAGE MANUAL																							
CODE	MODEL	40HC	40'	20'		ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	NO	AR	UK	RO	LT	KO	HE	CZ	SK	SR
02159420	RENOVA PURE AIR VNV90 XGBK	258	229	112		ES	EN	FR	PT	DE																				
02189020	RENOVA PURE AIR MNV90 GWH	176	0	0		ES	EN	FR	PT	DE																				
08000405	AS 750 /A	392	392	196		ES	EN	FR	PT	DE																				
08000406	AS 600	342	285	135		ES	EN	FR	PT	DE																				
02119207	ISLA MAGRABA	297	263	129		ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	No	AR								
02119203	ISLA MOON /B	527	467	229		ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	No	AR								
02119101	ISLA FARO X/B	347	308	151		ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	No	AR								
02111308	ISLA BENNU SLIM 900 X /A	236	209	102		ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	No	AR								
02111309	ISLA BENNU SLIM 1200 X /A	236	209	102		ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	No	AR								
02111002	ISLA SIRIN 1000 GWH	236	209	102		ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	No	AR								
02111001	ISLA SIRIN 1000 WH	236	209	102		ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	No	AR								
02111305	ISLA Fenix 1000 X /A	236	209	102		ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	No	AR								
02097202	ISLA LEGEND 900 XGBK	165	132	66		ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	No	AR								
02197313	ISLA SYGMA 900 X /E	156	138	68		ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	No	AR								
02025205	ISLA GAMMA 900 X /D	205	164	72		ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	No	AR								
02119311	ISLA Vega X /C	231	205	100		ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	No	AR								
02195309	ANGLO BOX 1000 X /C	144	127	62		ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	No	AR								
02195310	ANGLO X /D	92	82	40		ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	No	AR								
02169304	GALA 900 L /D	198	0	0		ES	EN	FR	PT	DE	IT	NL			SV	EL	RU	PL	HU	ZH	No	AR								
02166304	GALA 900 R /D	198	0	0		ES	EN	FR	PT	DE	IT	NL			SV	EL	RU	PL	HU	ZH	No	AR								
02129404	GOYA 90 BK /A	308	273	134		ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	No	AR								
02127404	GOYA 70 BK /A	386	342	168		ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	No	AR								
02129004	GOYA 90 WH /A	308	273	134		ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	No	AR								
02127004	GOYA 70 WH /A	386	342	168		ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	No	AR								
02184407	GRECO 90 BK	308	273	134		ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	No	AR								
02145407	GRECO 80 BK	343	304	149		ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	No	AR								
02133407	GRECO 70 BK	386	342	168		ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	No	AR								
02184007	GRECO 90 WH	308	273	134		ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	No	AR								
02145007	GRECO 80 WH	343	304	149		ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	No	AR								
02133007	GRECO 70 WH	386	342	168		ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	No	AR								
02145203	GRECO 80 GR	343	304	149		ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	No	AR								
02131407	THALASSA PRO 1200GBK	168	149	73		ES	EN	FR	PT	DE																				
02139407	THALASSA PRO 900GBK	258	229	112		ES	EN	FR	PT	DE																				
02138407	THALASSA PRO 800GBK	287	255	125		ES	EN	FR	PT	DE																				
02137407	THALASSA PRO 700GBK	322	286	140		ES	EN	FR	PT	DE																				
02136407	THALASSA PRO 600GBK	369	327	160		ES	EN	FR	PT	DE																				
02139007	THALASSA PRO 900GWH	258	229	112		ES	EN	FR	PT	DE																				
02138007	THALASSA PRO 800GWH	287	255	125		ES	EN	FR	PT	DE																				
02137007	THALASSA PRO 700GWH	322	286	140		ES	EN	FR	PT	DE																				
02136007	THALASSA PRO 600GWH	369	327	160		ES	EN	FR	PT	DE																				
02139507	THALASSA PRO 900GGR	258	229	112		ES	EN	FR	PT	DE																				
02138507	THALASSA PRO 800GGR	287	255	125		ES	EN	FR	PT	DE																				
02139406	THALASSA 900GBK	258	229	112		ES	EN	FR	PT	DE																				
02137406	THALASSA 700GBK	322	286	140		ES	EN	FR	PT	DE																				
02136406	THALASSA 600GBK	369	327	160		ES	EN	FR	PT	DE																				
02139006	THALASSA 900GWH	258	229	112		ES	EN	FR	PT	DE																				
02137006	THALASSA 700GWH	322	286	140		ES	EN	FR	PT	DE																				
02136006	THALASSA 600GWH	369	327	160		ES	EN	FR	PT	DE																				
02059701	JUNO+ 9000 GBK	360	144	144		ES	EN	FR	PT	DE																				
02078701	JUNO+ 7000 GBK	450	176	176		ES	EN	FR	PT	DE																				
02027701	JUNO+ 6000 GBK	510	192	192		ES	EN	FR	PT	DE																				
02059801	JUNO+ 9000 GWH	360	144	144		ES	EN	FR	PT	DE																				
02078801	JUNO+ 7000 GWH	450	176	176		ES	EN	FR	PT	DE																				
02027801	JUNO+ 6000 GWH	510	192	192		ES	EN	FR	PT	DE																				
02059700	JUNO 9000 GBK	360	144	144		ES	EN	FR	PT	DE																				
02078700	JUNO 7000 GBK	450	176	176		ES	EN	FR	PT	DE																				
02027700	JUNO 6000 GBK	510	192	192		ES	EN	FR	PT	DE																				
02029207	LEGEND 9000 XGBK	328	280	135		ES	EN	FR	PT	DE	IT																			
02021202	LEGEND 7000 XGBK	419	360	170		ES	EN	FR	PT	DE	IT																			
02029305	LEGEND 900 X	316	316	144		ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	No	AR								
02021306	LEGEND 700 X	360	360	168		ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	No	AR								
02132305	SYGMA 12010 X	162	113	55		ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	No	AR								
02075305	SYGMA 9010 X	300	288	144		ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	No	AR								
02021310	SYGMA 7010 X	375	360	168		ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	No	AR								
02060310	SYGMA 6010 X	408	408	192		ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	No	AR								
02075401	SYGMA 9010 BK	300	288	144		ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	No	AR								
02021400	SYGMA 7010 BK	360	360	168		ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	No	AR								
02060400	SYGMA 6010 BK	408	408	192		ES	EN	FR	PT	DE	IT	NL	DA	FI	SV															

HOODS

		LOADINGS			LANGUAGE MANUAL																								
CODE	MODEL	40HC	40'	20'	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	NO	AR	UK	RO	LT	KO	HE	CZ	SK	SR
02187308	CORONA X 70 /B	606	537	263	ES	EN	FR	PT	DE																				
02186308	CORONA X 60 /B	695	615	302	ES	EN	FR	PT	DE																				
02186400	CORONA BK 60	695	615	302	ES	EN	FR	PT	DE																				
02186010	CORONA WH 60	695	615	302	ES	EN	FR	PT	DE																				
02189309	ARMONIA 90 X /A	424	379	184	ES	EN	FR	PT	DE																				
02188309	ARMONIA 80 X	515	456	223	ES	EN	FR	PT	DE																				
02187309	ARMONIA 70 X	606	537	263	ES	EN	FR	PT	DE																				
02187409	ARMONIA 70 BK	606	537	263	ES	EN	FR	PT	DE																				
02186309	ARMONIA 60 X /A	695	615	302	ES	EN	FR	PT	DE																				
02186409	ARMONIA 60 BK	695	615	302	ES	EN	FR	PT	DE																				
02184309	ARMONIA 45 X /A	966	854	420	ES	EN	FR	PT	DE																				
02131208	GC DUAL 75 BK	616	546	268	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	No	AR								
02130208	GC DUAL 45 BK	955	846	415	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	No	AR								
02131207	GC DUAL 75 WH	616	546	268	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	No	AR								
02130207	GC DUAL 45 WH	955	846	415	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	No	AR								
02031308	G CX 83 SD	624	546	264	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	No									
02030308	G CX 53 SD	930	816	396	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	No									
02031304	G PL 75 X	950	400	400	ES	EN	FR	PT	DE																				
02030304	G PL 52 X	1100	930	470	ES	EN	FR	PT	DE																				
02031302	GL 75 X /D	522	498	240	ES	EN	FR	PT	DE																				
02030305	GL 45 X /C	966	828	396	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	No									
02031301	GT-PLUS 75 X /M	522	498	240	ES	EN	FR	PT	DE																				
02030309	GT-PLUS 45 X /M	966	828	396	ES	EN	FR	PT	DE																				
02030408	GT-PLUS 45 BK /M	966	828	396	ES	EN	FR	PT	DE																				
02030005	GT-PLUS 45 WH /M	966	828	396	ES	EN	FR	PT	DE																				
02031300	GCB 73 X	1000	840	400	ES	EN	FR	PT	DE																				
02030300	GCB 55 X	1300	930	470	ES	EN	FR	PT	DE																				
02130302	G 50 LUX X	849	752	369	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	No	AR								
02039005	G-45 X /L	1470	1260	600	ES	EN	FR	PT	DE	IT	NL					RU													
02039006	G-45 WH /L	1470	1260	600	ES	EN	FR	PT	DE	IT	NL					RU													
02010601	TFH 6830 X	980	880	440	ES	EN	FR	PT	DE																				
02010101	TFH 6830 GWH	980	880	440	ES	EN	FR	PT	DE																				
02010404	TFH 6830 GBK	980	880	440	ES	EN	FR	PT	DE																				
02010300	TFH 6630 X /A	980	880	440	ES	EN	FR	PT	DE																				
02010302	TFH 6630 BK /A	980	880	440	ES	EN	FR	PT	DE																				
02010301	TFH 6630 WH /A	980	880	440	ES	EN	FR	PT	DE																				
02010609	TFH 6430 X /B	1250	1080	530																									
02010409	TFH 6430 GBK /B	1250	1080	530																									
02010009	TFH 6430 GWH /B	1250	1080	530																									
02017203	TF-2003 600 GBK /B	1260	1080	540	ES	EN	FR	PT	DE	IT	NL					RU					AR								
02017202	TF-2003 600 GWH /A	1260	1080	540	ES	EN	FR	PT	DE	IT	NL					RU					AR								
02094306	EXTENDER 900	770	648	324	ES	EN	FR	PT	DE	IT	NL					RU					AR								
02099306	EXTENDER 700	960	828	414	ES	EN	FR	PT	DE	IT	NL					RU					AR								
02017606	EXTENDER 600	1260	1080	540	ES	EN	FR	PT	DE	IT	NL					RU					AR								
02094305	TF-2003 DURALUM 900 /D	770	656	324	ES	EN	FR	PT	DE	IT	NL					RU					AR								
02089305	TF-2003 DURALUM 700 /D	960	828	414	ES	EN	FR	PT	DE	IT	NL					RU					AR								
02017305	TF-2003 DURALUM 600 /D	1260	1080	540	ES	EN	FR	PT	DE	IT	NL					RU					AR								
02034310	TF-5260 X /L	1250	1116	516	ES	EN	FR	PT	DE	IT	NL					RU													
02034501	TF-5260 WH /L	1250	1116	516	ES	EN	FR	PT	DE	IT	NL					RU													
02034606	TFB-5160 X	1100	990	475	ES	EN	FR	PT	DE	IT																			
02034408	TFB-5160 BK	1100	990	475	ES	EN	FR	PT	DE	IT																			
02034107	TFB-5160 WH	1100	990	475	ES	EN	FR	PT	DE	IT																			
02001301	S-BOX X /A	876	732	344	ES	EN	FR	PT	DE	IT	NL																		
02011317	LF-2060 X/L	1617	1380	684	ES	EN	FR	PT	DE	IT	NL					EL	RU		HU	ZH	AR								
02011017	LF-2060 WH/L	1617	1380	684	ES	EN	FR	PT	DE	IT	NL					EL	RU		HU	ZH	AR								
00117000	ASP.CENTRIFUGO PROFESSIONAL 750	1819	1612	790	ES	EN	FR	PT	DE																				
00117100	ASP.CENTRIFUGO PROFESSIONAL 750 L	1819	1612	790	ES	EN	FR	PT	DE																				
00117400	ASP.CENTRIFUGO PROFESSIONAL 500 (GW)	3731	3198	1560	ES	EN	FR	PT	DE	IT	NL																		
00116110	ASP.CENTRIFUGO GS-600 PLUS 2 VEL.	4244	3761	1844	ES	EN	FR	PT	DE																				
00116400	ASP.CENTRIFUGO GS-600 BK	4244	3761	1844	ES	EN	FR	PT	DE																				
00116002	ASP.CENTRIFUGO GS-600	4244	3761	1844	ES	EN	FR	PT	DE																				
00114102	ASP.CENTRIFUGO GS-400 M	4244	3761	1844	ES	EN	FR	PT	DE																				
00111002	ASP.CENTRIFUGO GS-400 P	4244	3761	1844	ES	EN	FR	PT	DE																				

OVENS & MW

		LOADINGS			LANGUAGE MANUAL																								
CODE	MODEL	40HC	40'	20'	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	NO	AR	UK	RO	LT	KO	HE	CZ	SK	SR
07047400	MT 9011 PRO BK	228	162	72	ES	EN	FR	PT	DE																				
07002411	MT 8012 BK	214	162	72	ES	EN																							
07002412	MT 9012 WH	214	162	72	ES	EN																							
07001006	PR 6011 XGBK	216	162	81	ES	EN	FR	PT	DE					FI															
07001509	MDS 8008 X AIR FRVER	228	171	81	ES	EN	FR	PT	DE																				
07001010	MDS 8008 WH	228	171	81	ES	EN	FR	PT	DE																				

HOBBS

		LOADINGS			LANGUAGE MANUAL																									
CODE	MODEL	40HC	40'	20'	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	NO	AR	UK	RO	LT	KO	HE	CZ	SK	SR	
08024202	IDF 9012 PRO BK	945	860	400	ES	EN	FR	PT																						
08081206	IDF 8021 PRO BK	990	900	420	ES	EN	FR	PT																						
08026001	GIGA 750 BK	1194	1058	519	ES	EN	FR	PT	DE								RU	PL										UK		
08026002	GIGA 600 BK	1469	1302	638	ES	EN	FR	PT	DE								RU	PL										UK		
08026003	GIGA 600 WH	1469	1302	638	ES	EN	FR	PT	DE								RU	PL										UK		
08026609	GIGA 600 SD	1469	1302	638	ES	EN	FR	PT	DE								RU	PL										UK		
08000405	AS 750	392	392	196	ES	EN	FR	PT																						
08000406	AS 600	342	285	135	ES	EN	FR	PT	DE																					
08024402	INSB 9012 BK /A	945	860	400	ES	EN	FR	PT																						
08081401	INSB 8021 BK /A	990	900	420	ES	EN	FR	PT																						
08063404	INSB 6032 BK /A	1440	1200	550	ES	EN	FR	PT																						
08053000	INSB 6030 WH	1440	1200	550	ES	EN	FR	PT																						
08063500	INSB 6028 BK	1440	1200	550	ES	EN	FR	PT																						
08063122	INSB 6003E2 BK 220-240V 50-60Hz	1440	1200	550	ES	EN	FR	PT	DE																					
08063123	INSB 6003E2 WH 220-240V 50-60Hz	1440	1200	550	ES	EN	FR	PT	DE																					
08063116	IBS 6303E2 220-240V 50-60Hz	1440	1200	550	ES	EN	FR	PT	DE																					
08063120	IB 6303E2 BK 220-240V 50-60Hz	1440	1200	550	ES	EN	FR	PT	DE																					
08063121	IB 6403E2 BK 220-240V 50-60Hz	1440	1200	550	ES	EN	FR	PT	DE																					
08074007	IB 5003 BK	900	800	380	ES	EN	FR	PT	DE	IT	NL					RU	PL	HU				AR	UK		LT			CZ	SK	SR
08063119	IB 6324E2 BK 220-240V 50-60Hz	1440	1200	550	ES	EN	FR	PT	DE																					
08081210	IB 853 BK/A	1736	1539	755	ES	EN	FR	PT	DE	IT	NL					RU	PL	HU				AR	UK		LT			CZ	SK	SR
08027208	IB 2 PLUS BK /A	792	1400	700	ES	EN	FR	PT	DE	IT	NL					RU	PL	HU				AR	UK		LT			CZ	SK	SR
08003405	ISB 3102 BK /A	2700	2300	1100	ES	EN	FR	PT	DE	IT	NL					RU	PL	HU				AR	UK		LT			CZ	SK	SR
08063413	TDM 6003	1800	1800	900	ES	EN	FR	PT	DE	IT	NL					RU	PL	HU				AR	UK		LT			CZ	SK	SR
08040011	TN 604 /B	1800	1800	900	ES	EN	FR	PT	DE	IT	NL					RU	PL	HU				AR	UK		LT			CZ	SK	SR
08072202	604 HVI /C	960	-	-	ES	EN	FR	PT	DE	IT	NL					RU	PL	HU				AR	UK		LT			CZ	SK	SR
08063212	TT 6003	1800	1800	900	ES	EN	FR	PT	DE	IT	NL					RU	PL	HU				AR	UK		LT			CZ	SK	SR
08063411	TD 6003 BK /A	1800	1800	900	ES	EN	FR	PT	DE	IT	NL					RU	PL	HU				AR	UK		LT			CZ	SK	SR
08077001	TT 5003 /G	1800	1800	900	ES	EN	FR	PT	DE	IT	NL					RU	PL	HU				AR	UK		LT			CZ	SK	SR
08060405	TD 3002 BK /B	3100	3100	1512	ES	EN	FR	PT	DE	IT	NL					RU	PL	HU				AR	UK		LT			CZ	SK	SR
08049007	V1302 /D	1920	-	-	ES	EN	FR	PT	DE	IT	NL					RU	PL	HU				AR	UK		LT			CZ	SK	SR
08005404	LCI 9041 BK	750	650	312	ES	EN	FR	PT	DE	IT	NL					RU	PL	HU				AR	UK		LT			CZ	SK	SR
08046410	L-7005 CI	1080	936	429	ES	EN	FR	PT	DE	IT	NL					RU	PL	HU				AR	UK		LT			CZ	SK	SR
08041100	LCI 6031 WH	1125	975	481	ES	EN	FR	PT	DE	IT	NL					RU						AR								
08041500	LCI 6031 BK	1125	975	481	ES	EN	FR	PT	DE	IT	NL					RU						AR								
08041503	LCIB 6031 BK	1125	975	481	ES	EN	FR	PT	DE	IT	NL					RU						AR								
08041501	CCI 6031 BK	1125	975	481	ES	EN	FR	PT	DE	IT	NL					RU						AR								
08041412	CI 631 BK A/A	1125	975	481	ES	EN	FR	PT	DE	IT	NL					RU						AR								
08068400	CIB 6031 BK	1125	975	481	ES	EN	FR	PT	DE	IT	NL					RU						AR								
08068401	LCI 6021 BK	1125	975	481	ES	EN	FR	PT	DE	IT	NL					RU						AR								
08068403	LCIB 6021 BK	1125	975	481	ES	EN	FR	PT	DE	IT	NL					RU						AR								
08068405	SCI 6021 BK	1125	975	481	ES	EN	FR	PT	DE	IT	NL					RU						AR								
08068501	CCI 6021 BK	1125	975	481	ES	EN	FR	PT	DE	IT	NL					RU						AR								
08068309	CI 6021 BK	1125	975	481	ES	EN	FR	PT	DE	IT	NL					RU						AR								
08068402	CIB 6021 BK	1125	975	481	ES	EN	FR	PT	DE	IT	NL					RU						AR								
08041505	CCI 5003 BK	1125	975	481	ES	EN	FR	PT	DE	IT	NL					RU	PL	HU				AR	UK		LT			CZ	SK	SR
08047410	SCI 3002 BK	1802	1680	840	ES	EN	FR	PT	DE	IT	NL					RU	PL	HU				AR	UK		LT			CZ	SK	SR
08028403	RCl 631 BK	900	780	390	ES	EN	FR	PT	DE	IT	NL					RU						AR								
08005350	LGI 9041 X	750	650	312	ES	EN	FR	PT	DE	IT	NL					RU	PL	HU				AR	UK		LT			CZ	SK	SR
08045305	LGI 7041 X /A	1080	936	429	ES	EN	FR	PT	DE	IT	NL					RU						AR								
08066002	LGD 631 X	1080	936	455	ES	EN	FR	PT	DE	IT	NL					RU						AR								
08066011	GI 6031 X	1125	975	481	ES	EN	FR	PT	DE	IT	NL					RU						AR								
08066600	GI 6004 X	1125	975	481	ES	EN	FR	PT	DE	IT	NL					RU						AR								
08066312	GIB 6004 X	1125	975	481	ES	EN	FR	PT	DE	IT	NL					RU						AR								
08068308	GI 6021 X	1125	975	481	ES	EN	FR	PT	DE	IT	NL					RU						AR								
08068310	GIB 6021 X	1125	975	481	ES	EN	FR	PT	DE	IT	NL					RU						AR								
08039600	GI 3002 X /A	1802	1680	840	ES	EN	FR	PT	DE	IT	NL					RU	PL	HU				AR	UK		LT			CZ	SK	SR

KITCHENWARE

		LOADINGS			LANGUAGE MANUAL																									
CODE	MODEL	40HC	40'	20'	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	NO	AR	UK	RO	LT	KO	HE	CZ	SK	SR	
03000005	SET NEW YORK	1432	1232	584	ES	EN	FR	PT	DE																					
03000006	SET PROFESSIONAL	2058	-	-	ES	EN	FR	PT	DE																					
03017400	PARRILLA BARBACOA	4160	4160	2128																										

DISHWASHERS

		LOADINGS			LANGUAGE MANUAL																								
CODE	MODEL	40HC	40'	20'	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	NO	AR	UK	RO	LT	KO	HE	CZ	SK	SR
07200078	LVI 62014	162	108	54																									
07200080	LVI 48010	248	168	80																									
07200079	LVI 62012	162	108	54																									
07820081	LVI 47010	248	168	80																									

WASHING MACHINE

		LOADINGS			LANGUAGE MANUAL																								
CODE	MODEL	40HC	40'	20'	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	NO	AR	UK	RO	LT	KO	HE	CZ	SK	SR
07900002	LI 08014 /A	114	114	54	ES	EN																							

COOLING

		LOADINGS			LANGUAGE MANUAL																								
CODE	MODEL	40HC	40'	20'	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	NO	AR	UK	RO	LT	KO	HE	CZ	SK	SR
07800078	CI-54177 ST /D	105	80	40																									
07800079	CI-54177 NF /C	105	80	40																									
07751006	VI 15107 X	704	600	288	ES	EN	FR	PT	DE																				
07751007	VI 30117 X	397	304	144	ES	EN	FR	PT	DE																				
07751008	VI 54024 X	269	216	108	ES	EN	FR	PT	DE																				
07702004	VI 59082 X /A	171	114	54	ES	EN	FR	PT	DE																				
07701404	VI 59082 BK	170	114	54																									

SINKS

		LOADINGS		
CODE	MODEL	40HC	40'	20'
02625006	CB 50-40 R10	940	800	380
02621006	CB 45-40 R10	1100	930	430
02624006	CB 40-40 P R10	1170	990	470
02624016	CB 40-40 R10	1170	990	470
02607101	CB-2 /A	650	520	240
02625300	CB 50-40	960	800	380
02621009	CB 45-40	1070	930	430
02624007	CB 40-40 /D	1100	930	430
02624302	CBP 40-40 /A	1170	990	470
02624008	CBS-1 40-40 D R10	494	419	194
02624009	CBS-2 40-40 R10	494	419	194
02624010	CBS-1 54-40 R10	696	590	274
02606603	CDL-1 REV	720	620	290
02606601	CDL-1 EI	720	620	290
02606602	CDL-1 ED	720	620	290
02606503	CDP-1 REV	682	604	296
02606501	CDP-1 EI	682	604	296
02606502	CDP-1 ED	682	604	296
02603300	RD-1 REV	730	600	280
02606400	CDS-1 REV	1158	1026	503
02606401	CDS-1 EI	1158	1026	503
02606402	CDS-1 ED	1158	1026	503
02607102	C-2 AG /B	670	570	270
02604209	R-2 AG	650	580	700
02612300	CSS60-1	920	750	350
02612400	CSS-1	1300	1050	480
02612101	CS-1	1120	950	450
02602100	RS-1 /A	1060	900	920

TAPS

		LOADINGS		
CODE	MODEL	40HC	40'	20'
02507400	CPA	4224	3876	1938
02506400	CPB	5808	5236	2584
02506300	XPB	7326	6732	3060
02500301	XSE	9000	7800	3600
02500401	CSE	7360	6160	2720
02500601	BSE	7360	6160	2720
02500400	CSA/B	7360	6160	2720
02503400	CMA/G	7360	6160	2720
02502400	CBA/C	7360	6160	2720
02501400	CBB/B	7360	6160	2720

HOODS

		LOADINGS						LANGUAGE MANUAL																					
CODE	MODEL	40HC	40'	20'	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL	HU	ZH	NO	AR	UK	RO	LT	KO	HE	CZ	SK	SR
00900200	E-100 GTH Hygro (EXT. BAÑO PREMIUM)	2000	16800	2000	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV		RU	PL			No	AR			LT					
00901200	E-120 GTH TIMER HYGRO	19100	16925	8300	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV		RU	PL			No	AR			LT					
00902200	E-150 GTH TIMER HYGRO	19100	16925	8300	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV		RU	PL			No	AR			LT					
00900600	E-100 GSTH GLASS SILVER TIMER HYGRO	19100	16925	8300	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV		RU	PL			No	AR			LT					
00900602	E-100 GTH BK HYGRO (EXT. BAÑO PREMIUM)	19100	16925	8300	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV		RU	PL			No	AR			LT					
00900100	E-100 GT Timer (EXT. BAÑO PREMIUM)	19100	16925	8300	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV		RU	PL			No	AR			LT					
00901100	E-120 GT TIMER	19100	16925	8300	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV		RU	PL			No	AR			LT					
00902100	E-150 GT TIMER	19100	16925	8300	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV		RU	PL			No	AR			LT					
00900500	E-100 GST GLASS SILVER TIMER	19100	16925	8300	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV		RU	PL			No	AR			LT					
00900502	E-100 GT BK TIMER (EXT. BAÑO PREMIUM)	19100	16925	8300	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV		RU	PL			No	AR			LT					
00900001	E-100 GLT LIGHT TIMER	19100	16925	8300	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV		RU	PL			No	AR			LT					
00900000	E-100 G std. (EXT. BAÑO PREMIUM)	19100	16925	8300	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV		RU	PL			No	AR			LT					
00900400	E-100 GS GLASS SILVER STD.	19100	16925	8300	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV		RU	PL			No	AR			LT					
00900402	E-100 G BK STD (EXT. BAÑO PREMIUM)	19100	16925	8300	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV		RU	PL			No	AR			LT					
00901000	E-120 G STD	19100	16925	8300	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV		RU	PL			No	AR			LT					
00902000	E-150 G STD	38200	33850	16600	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV		RU	PL			No	AR			LT					
01200200	UC-10 Hygro	38200	33850	16600	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL			No	AR			LT					
01201200	EXTRACTOR UC-10 HYGRO SILVER	38200	33850	16600	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL			No	AR			LT					
01202200	EXTRACTOR UC-10 HYGRO BLACK	38200	33850	16600	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL			No	AR			LT					
15000000	UC-8	38200	33850	16600	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL			No	AR			LT					
01200100	UC-10 Timer	38200	33850	16600	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL			No	AR			LT					
01201000	UC-10 Timer SILVER	38200	33850	16600	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL			No	AR			LT					
01202100	UC-10 Timer BLACK	38200	33850	16600	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL			No	AR			LT					
01200000	UC-10 STD	38200	33850	16600	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL			No	AR			LT					
01255000	UC-10 STD SILVER	38200	33850	16600	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL			No	AR			LT					
01256000	UC-10 STD BLACK	38200	33850	16600	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL			No	AR			LT					
01300200	UC-12 Hygro	19100	16925	8300	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL			No	AR			LT					
01301200	UC-12 HYGRO SILVER	19100	16925	8300	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL			No	AR			LT					
01302200	UC-12 HYGRO BLACK	19100	16925	8300	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL			No	AR			LT					
01300100	UC-12 Timer	19100	16925	8300	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL			No	AR			LT					
01301000	UC-12 Timer SILVER	19100	16925	8300	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL			No	AR			LT					
01302000	UC-12 Timer BLACK	19100	16925	8300	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL			No	AR			LT					
01300000	UC-12 STD	19100	16925	8300	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL			No	AR			LT					
01355000	UC-12 STD SILVER	19100	16925	8300	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL			No	AR			LT					
01356000	UC-12 STD BLACK	19100	16925	8300	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV	EL	RU	PL			No	AR			LT					
01016000	X-MART 10 MATIC T	25467	22567	11067	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV		RU	PL			No					LT				
01015000	X-MART 10 MATIC	25467	22567	11067	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV		RU	PL			No					LT				
01045000	X-MART 10 MATIC INOX	25467	22567	11067	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV		RU	PL			No					LT				
01025000	X-MART 12 MATIC	19100	16925	8300	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV		RU	PL			No					LT				
01035000	X-MART 15 MATIC	19100	16925	8300	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV		RU	PL			No					LT				
00916000	ASP AXIAL, B-10 MATIC-TIMER	38200	33850	16600	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV						No									
00915000	ASP AXIAL, B-10 MATIC	38200	33850	16600	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV						No									
00935000	ASP AXIAL, B-15 MATIC	38200	33850	16600	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV						No									
01044000	X-MART 10 INOX H	25467	22567	11067	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV		RU	PL			No				LT					
01011000	X-MART 10 TIMER	25467	22567	11067	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV		RU	PL			No					LT				
01010000	X-MART 10 STANDARD	25467	22567	11067	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV		RU	PL			No					LT				
01020000	X-MART 12 STANDARD	25467	22567	11067	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV		RU	PL			No					LT				
01030000	X-MART 15 STANDARD	25467	22567	11067	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV		RU	PL			No					LT				
01040000	X-MART 10 INOX	25467	22567	11067	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV		RU	PL			No					LT				
01050000	X-MART 12 INOX	25467	22567	11067	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV		RU	PL			No					LT				
01060000	X-MART 15 INOX	25467	22567	11067	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV		RU	PL			No					LT				
01070000	ASP AXIAL, SILENTIS LN 10 T	38200	33850	16600	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV						No					LT				
01072000	ASP AXIAL, SILENTIS LN 10	38200	33850	16600	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV						No					LT				
01080300	ASP AXIAL, SILENTIS 12 INOX	38200	33850	16600	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV						No					LT				
01090000	ASP AXIAL, SILENTIS 15	38200	33850	16600	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV						No					LT				
00990000	ASP AXIAL, B-8 PLUS	38200	33850	16600	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV						No									
00981001	ASP AXIAL, B-10 PLUS / B	38200	33850	16600	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV						No									
00983000	ASP AXIAL, B-15 PLUS	38200	33850	16600	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV						No									
00911000	ASP AXIAL, B-10 TIMER	38200	33850	16600	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV						No									
00910000	ASP AXIAL, B-10	38200	33850	16600	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV						No									
00920000	ASP AXIAL, B-12	38200	33850	16600	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV						No									
00930000	ASP AXIAL, B-15	38200	33850	16600	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV						No									
00925000	ASP AXIAL, B-12 MATIC	38200	33850	16600	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV						No									
00926000	ASP AXIAL, B-12 MATIC TIMER	38200	33850	16600	ES	EN	FR	PT	DE	IT	NL	DA	FI	SV															







CATA ELECTRODOMÉSTICOS S.L.

Tlf: +34 938 594 100.- Fax +34 938 594 101.

www.cata.es - www.cnagroup.es - cna@cnagroup.es

Headquarters: c/ Anabel Segura, 11, Edif. A, 3a pl. 28108. Alcobendas (Madrid. Spain)

Factory: c/ del Ter, 2, Apdo. 9. 08570. Torelló (Barcelona. Spain)

CNA
group

cata

edesa

NODOR

Apelson